




## Features:

- Standard self locking range

## Specifications:

Material : Nylon 66, 94V-2 recognised by UL. Heat-resisting, insulates well and not apt to age  
 Operating temperature : -35°C to 85°C  
 Colours : Natural (or white, standard colour)

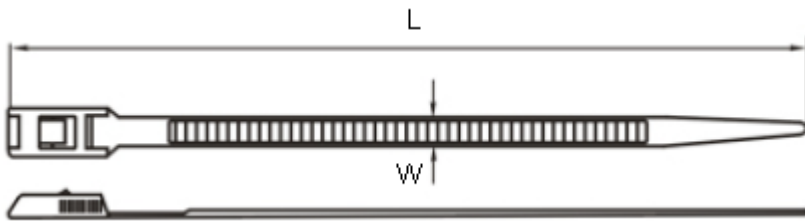

## Nylon Cable Ties – Standard Self Locking Range

### Part Number Table

| Description                         | Part Number |
|-------------------------------------|-------------|
| Cable Tie, 100 × 2.5 mm NAT 100 PK  | CBBR6666    |
| Cable Tie, 100 × 2.5 mm NAT 1000 PK | CBBR6667    |
| Cable Tie, 140 × 2.5 mm NAT 100 PK  | CBBR6670    |
| Cable Tie, 140 × 3.5 mm NAT 100 PK  | CBBR6672    |
| Cable Tie, 150 × 6.3 mm NAT 100 PK  | CBBR6674    |
| Cable Tie, 180 × 4.5 mm NAT 1000 PK | CBBR6677    |
| Cable Tie, 200 × 2.5 mm NAT 100 PK  | CBBR6678    |
| Cable Tie, 200 × 2.5 mm NAT 1000 PK | CBBR6679    |
| Cable Tie, 200 × 3.5 mm NAT 100 PK  | CBBR6681    |
| Cable Tie, 200 × 3.5 mm NAT 1000 PK | CBBR6682    |
| Cable Tie, 200 × 4.5 mm NAT 100 PK  | CBBR6683    |
| Cable Tie, 200 × 4.5 mm NAT 1000 PK | CBBR6684    |
| Cable Tie, 250 × 6.8 mm NAT 100 PK  | CBBR6685    |
| Cable Tie, 300 × 3.5 mm NAT 100 PK  | CBBR6686    |
| Cable Tie, 300 × 3.5 mm NAT 1000 PK | CBBR6687    |
| Cable Tie, 300 × 4.5 mm NAT 100 PK  | CBBR6688    |

| Description                         | Part Number |
|-------------------------------------|-------------|
| Cable Tie, 300 × 4.5 mm NAT 1000 PK | CBBR6689    |
| Cable Tie, 370 × 3.5 mm NAT 100 PK  | CBBR6690    |
| Cable Tie, 370 × 4.7 mm NAT 100 PK  | CBBR6692    |
| Cable Tie, 370 × 4.7 mm NAT 1000 PK | CBBR6693    |
| Cable Tie, 370 × 7.5 mm NAT 100 PK  | CBBR6694    |
| Cable Tie, 400 × 4.7 mm NAT 100 PK  | CBBR6695    |
| Cable Tie, 500 × 4.7 mm NAT 100 PK  | CBBR6696    |
| Cable Tie, 100 × 2.5 mm BLK 100 PK  | CBBR6697    |
| Cable Tie, 120 × 4.5 mm BLK 100 PK  | CBBR6699    |
| Cable Tie, 120 × 4.5 mm BLK 1000 PK | CBBR7241    |
| Cable Tie, 140 × 2.5 mm BLK 100 PK  | CBBR7242    |
| Cable Tie, 140 × 2.5 mm BLK 1000 PK | CBBR7243    |
| Cable Tie, 140 × 3.5 mm BLK 100 PK  | CBBR7244    |
| Cable Tie, 140 × 3.5 mm BLK 1000 PK | CBBR7245    |
| Cable Tie, 150 × 6.8 mm BLK 100 PK  | CBBR7246    |
| Cable Tie, 160 × 2.5 mm BLK 100 PK  | CBBR7247    |

## Nylon Cable Ties – Standard Self Locking Range

### Part Number Table

| Description                         | Part Number |
|-------------------------------------|-------------|
| Cable Tie, 180 × 4.5 mm BLK 100 PK  | CBBR7248    |
| Cable Tie, 180 × 4.5 mm BLK 1000 PK | CBBR7249    |
| Cable Tie, 200 × 2.5 mm BLK 100 PK  | CBBR7250    |
| Cable Tie, 200 × 2.5 mm BLK 1000 PK | CBBR7251    |
| Cable Tie, 200 × 6.8 mm BLK 100 PK  | CBBR7252    |
| Cable Tie, 200 × 3.5 mm BLK 100 PK  | CBBR7253    |
| Cable Tie, 200 × 4.5 mm BLK 100 PK  | CBBR7255    |
| Cable Tie, 200 × 4.5 mm BLK 1000 PK | CBBR7256    |
| Cable Tie, 300 × 3.5 mm BLK 100 PK  | CBBR7258    |
| Cable Tie, 300 × 3.5 mm BLK 1000 PK | CBBR7259    |
| Cable Tie, 300 × 4.5 mm BLK 100 PK  | CBBR7260    |
| Cable Tie, 300 × 4.5 mm BLK 1000 PK | CBBR7261    |
| Cable Tie, 370 × 3.5 mm BLK 100 PK  | CBBR7262    |
| Cable Tie, 370 × 4.7 mm BLK 100 PK  | CBBR7264    |
| Cable Tie, 370 × 4.7 mm BLK 1000 PK | CBBR7265    |
| Cable Tie, 370 × 7.5 mm BLK 100 PK  | CBBR7266    |
| Cable Tie, 400 × 4.7 mm BLK 100 PK  | CBBR7267    |
| Cable Tie, 500 × 4.7 mm BLK 100 PK  | CBBR7268    |

## Nylon Cable Ties - Standard Self Locking - Weather Resistant

### Part Number Table

| Description                                      | Part Number |
|--|-------------|
| 100 × 2.5 mm Weather Proof CBL Tie 100           | CBBR7702    |
| 120 × 4.8 mm Weather Resistant CBL Ties 100 PKS  | CBBR7703    |
| 142 × 2.5 mm Weather Resistant Cable Ties 100 PK | CBBR7704    |
| 142 × 3.2 mm Weather Resistant CBL Ties 100 PK   | CBBR7705    |
| 165 × 2.5 mm Weather Resistant CBL Ties 100 PK   | CBBR7706    |
| 160 × 4.8 mm Weather Resistant CBL Ties 100 PK   | CBBR7707    |
| 203 × 2.5 mm Weather Resistant CBL Ties 100 PK   | CBBR7708    |
| 203 × 3.6 mm Weather Resistant CBL Ties 100 PK   | CBBR7709    |
| 203 × 4.6 mm Weather Proof Cable Ties 100 PKS    | CBBR7710    |
| 292 × 3.6 mm Weather Resistant CBL Ties 100 PK   | CBBR7711    |
| 300 × 4.8 mm Weather Proof Cable Ties 100 PKS    | CBBR7712    |
| 370 × 3.6 mm Weather Proof Cable Ties 100 PKS    | CBBR7713    |
| 370 × 4.8 mm Weather Resistant CBL Ties 100 PK   | CBBR7714    |
| 380 × 7.6 mm Weather Resistant CBL Ties 100 PK   | CBBR7715    |

## Nylon Cable Ties - Releasable



Material : Nylon 66, 94V-2

## Part Number Table

| Description  | Part Number |
|--|-------------|
| Releasable Cable Ties 120 mm × 7.6 mm Black 100 Pack   | CBBR7722    |
| Releasable Cable Ties 150 mm × 7.6 mm Black 100 Pack   | CBBR7723    |
| Releasable Cable Ties 200 mm × 8 mm Black 100 Pack     | CBBR7724    |
| Releasable Cable Ties 250 mm × 7.6 mm Black 100 Pack   | CBBR7725    |
| Releasable Cable Ties 300 mm × 8 mm Black 100 Pack     | CBBR7726    |
| Releasable Cable Ties 125 mm × 7.6 mm Natural 100 Pack | CBBR7727    |
| Releasable Cable Ties 150 mm × 7.6 mm Natural 100 Pack | CBBR7728    |
| Releasable Cable Ties 200 mm × 8 mm Natural 100 Pack   | CBBR7729    |
| Releasable Cable Ties 300 mm × 8 mm Natural 100 Pack   | CBBR7731    |

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2011.