

 Design Support

Home &gt; Support &gt; Design Support &gt; Design Resources &gt; Evaluation Boards

## Previously Viewed Products

Select Product ...



Clear List

## Technical Documentation

 Design Resources

## Design &amp; Development Tools

## Evaluation Boards

## Conversion Services

## Evaluation Board Documents

## Custom Foundry Services

## Sample Kits

## Simulation Models

## Product Recommendation Tools


## Software

## Video

## Technical Support

## Evaluation Board Description

The NCP3066 is a monolithic switching regulator designed to deliver constant current for powering high brightness LEDs. The device has a low feedback voltage of 235 mV which is used to regulate the average current of the LED string. The device supports a buck configuration with a wide input voltage range from 3.0V to 40.0V. The NCP3066 is a low cost converter that supports a peak current of 1.5A with a maximum duty cycle of 85.7%. The ON/OFF function allows turn the device to low consumption mode, or drive the LED brightness using PWM signal. Size: 42mm x 32mm x 13mm

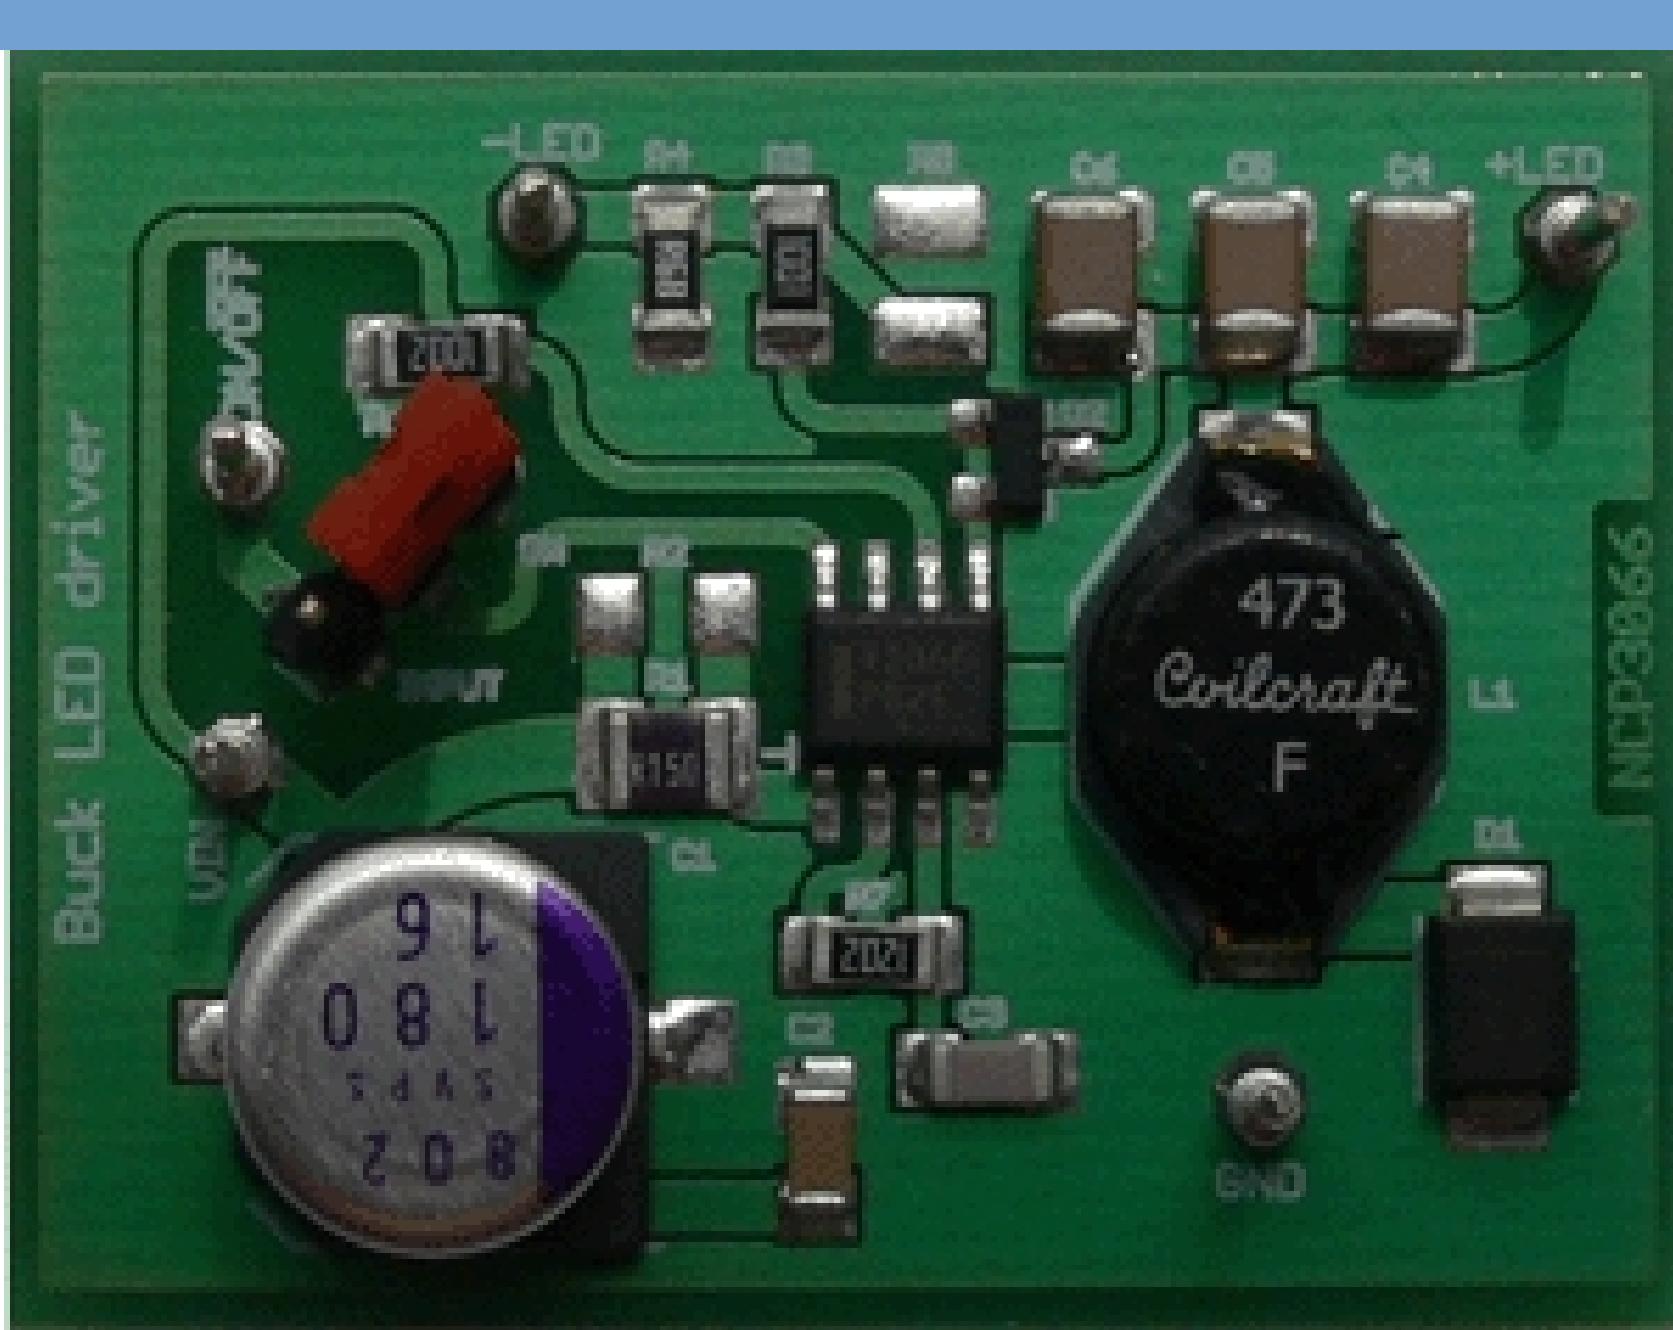

## Features and Applications

## Features

- ? Integrated 1.5 A Switch
- ? Input Voltage Range from 3.0 V to 40 V
- ? Logic Level Shutdown Capability
- ? Low Feedback Voltage of 235 mV
- ? Cycle by Cycle Current Limit
- ? No Control Loop Compensation Required
- ? Frequency of Operation Adjustable up to 250 kHz
- ? Operation With All Ceramic Output Capacitors or No Output Capacitance
- ? Analog and Digital PWM Dimming Capability
- ? Internal Thermal Shutdown with Hysteresis
- ? NCV Prefix for Automotive and Other Applications Requiring Site and Control Changes
- ? These are Pb Free Devices

## Evaluation Board Information

Evaluation Board	Status	Pb-free	Short Description	Parts Used	Action
NCP3066SCBCKGEVB	Active	<input checked="" type="checkbox"/> Pb-fre	NCP3066 SOIC8 BUCK DB	NCP3066DR2G	Contact Local Sales Office

## Technical Documents

Type	Document Title	Document ID/Size	Rev
Eval Board: BOM	NCP3066SCBCKGEVB Bill of Materials ROHS Compliant	NCP3066SCBCKGEVB_BOM_ROHS.PDF - 101.0 KB	0
Eval Board: Gerber	NCP3066SCBCKGEVB Gerber Layout Files (Zip Format)	NCP3066SCBCKGEVB_GERBER.ZIP - 30.0 KB	0
Eval Board: Schematic	NCP3066SCBCKGEVB Schematic	NCP3066SCBCKGEVB_SCHEMATIC.PDF - 132.0 KB	0
Eval Board: Test Procedure	NCP3066SCBCKGEVB Test Procedure	NCP3066SCBCKGEVB_TEST_PROCEDURE.PDF - 395.0 KB	0