


# Bridge Rectifier



## Features:

- In-line glass passivated single phase rectifier bridge
- Surge overload rating: 60 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing moulded plastic technique

## Mechanical Data:

Terminals : Lead solderable per MIL-STD-202, Method 208  
Mounting position : Any  
Weight : 0.06oz, 1.7g

## Maximum Ratings and Electrical Characteristics:

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.

Parameter	2KBP02M	2KBP08M	Units
Maximum recurrent peak reverse voltage	200	800	V
Maximum RMS bridge input voltage	140	560	
Maximum DC blocking voltage	200	800	
Maximum average rectified output current at 25°C ambient	2		A
Peak one cycle surge overload current	60		
Maximum forward voltage drop per bridge element at 3.14A DC	1.1		V
Maximum (Total bridge) reverse leakage at rated DC blocking voltage	5		mA
Maximum (Total bridge) reverse leakage at rated DC blocking voltage and 100°C	0.5		
I <sup>2</sup> t Rating for fusing ( t <8.35ms)	15		A <sup>2</sup> Seconds
Typical junction capacitance per leg (Note 1) C <sub>J</sub>	25		pF
Typical thermal resistance per leg (Note 2) R <sub>θJA</sub> Typical thermal resistance per leg (Note 2) R <sub>θJL</sub>	30 11		°C/W
Operating temperature range	-55 to +125		
Storage temperature range	-55 to +150		°C

## Notes:

1. Measured at 1MHz and applied reverse voltage of 4V.
2. Thermal resistance from junction to ambient and from junction to lead mounted on PCB with 0.47" × 0.47" (12mm × 12mm) copper pads.

## Rating and Characteristics Curves

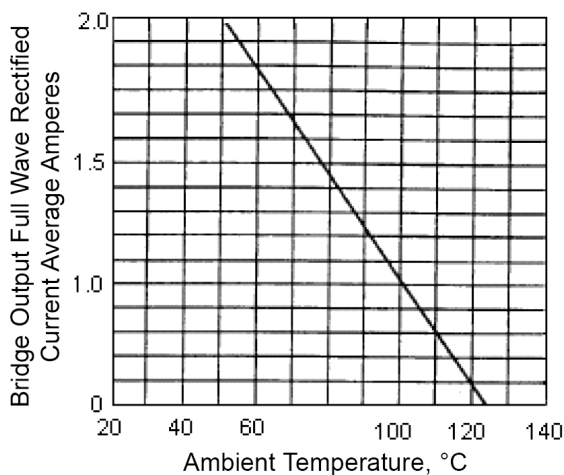


Figure 1 - Derating Curve for Output Rectified Current

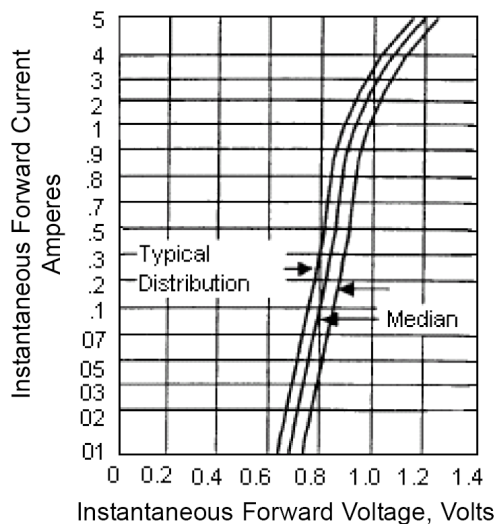


Figure 2 - Typical Forward Characteristics (25°C)

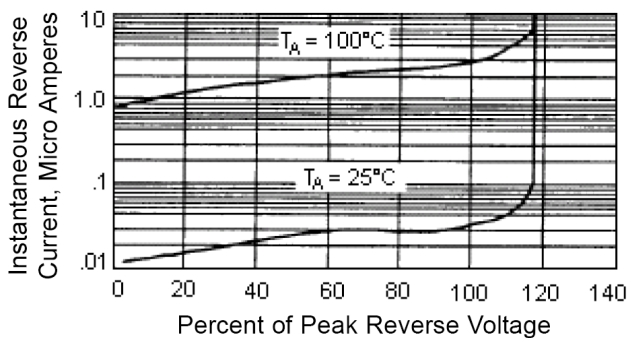


Figure 3 - Typical Reverse Characteristics


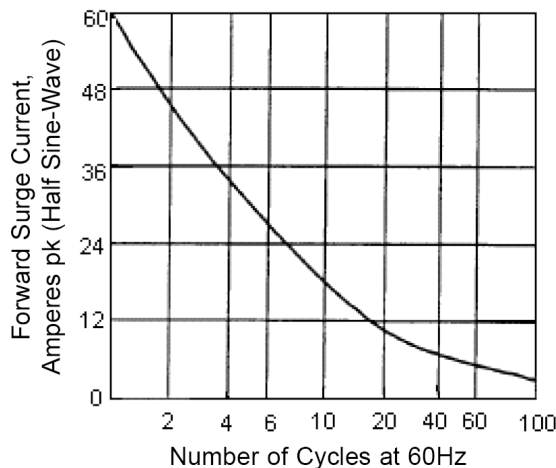


Figure 4 - Non-Recurrent Surge Rating

# Bridge Rectifier

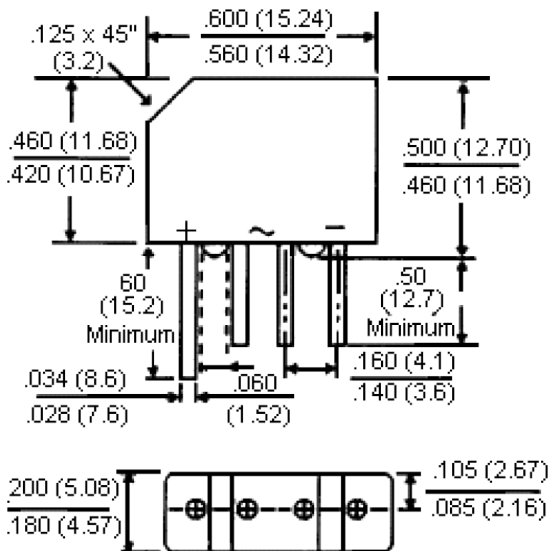

Dimensions : Inches (Millimetres)

## Part Number Table

Description	V <sub>RRM</sub> (V)	Maximum Input Voltage (V AC)	I <sub>D</sub> at I <sub>FSM</sub> = 60A	Pin Spacing	Current Rating (A)	Body			Part Number
						Height	Width	Depth	
Bridge Rectifier	200	140	2	4.1	2	12.7	15.24	5.08	2KBP02M
	800	560							2KBP08M

Dimensions : Inches (Millimetres)

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com  
www.farnell.com  
www.newark.com

