


HZ0805D102R-10

UNCONTROLLED DOCUMENT


PHYSICAL DIMENSIONS:

A	2.00 [.079]	+ 0.20 [.008]
B	1.25 [.049]	+ 0.20 [.008]
C	0.90 [.035]	+ 0.20 [.008]
D	0.51 [.020]	+ 0.25 [.010]

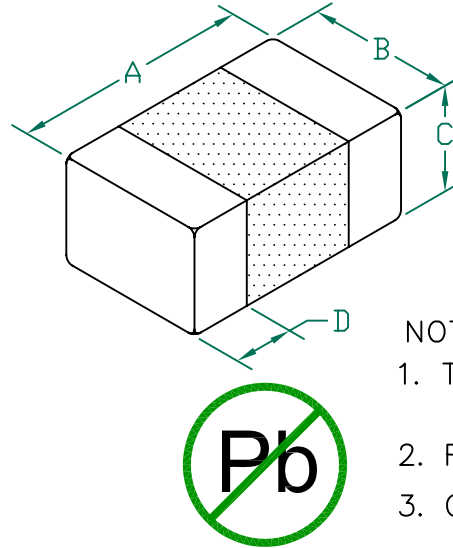


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	1000		
Minimum	750		
Maximum	1250	0.3	400 mA

Z vs FREQUENCY
IMPEDANCE UNDER DC BIAS

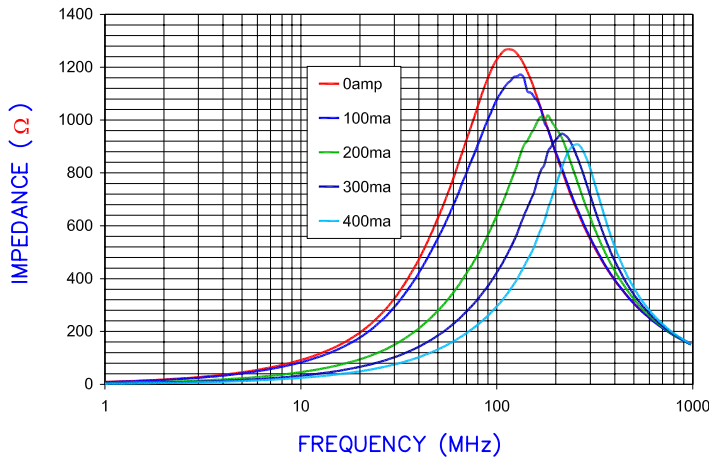


|Z|, R, AND X vs. FREQUENCY

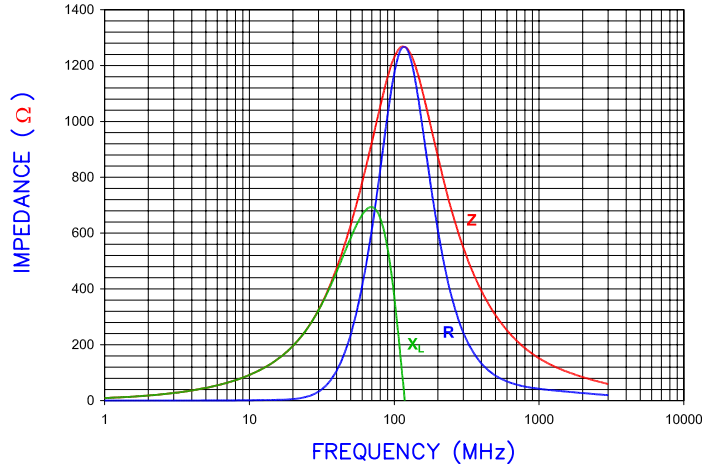


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL,PAPER TAPE
2. REFERENCE PREVIOUS STEWARD P/N HZ0805C102R-00
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

LAND PATTERNS FOR REFLOW SOLDERING

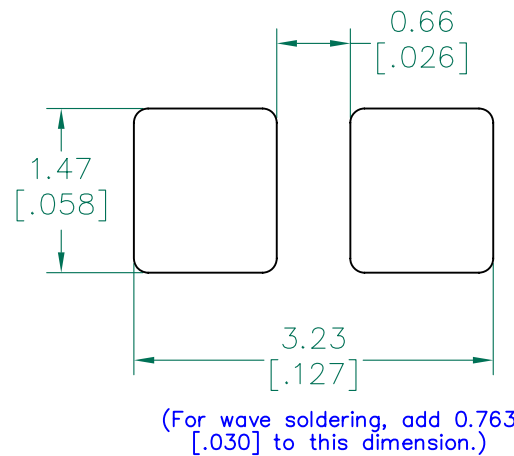

RECOMMENDED SOLDERING CONDITIONS

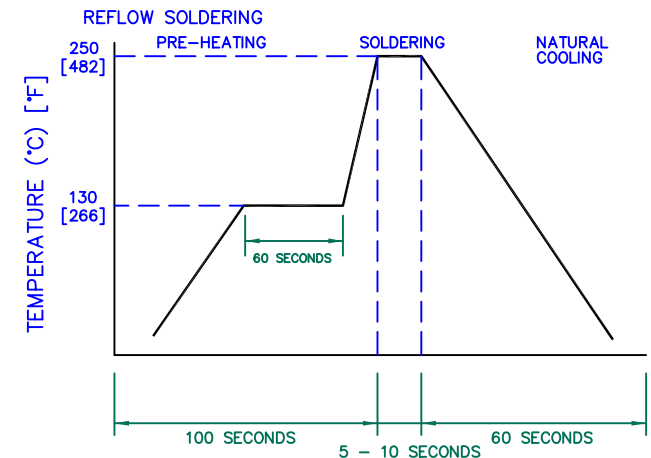

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



C		CHANGE TO PAPER TAPE	03/03/10	JUN	PROJECT/PART NUMBER: HZ0805D102R-10		REV C	PART TYPE: CO-FIRE	DRAWN BY: TMB
B		UPDATE COMPANY LOGO ADD ROHS	03/20/08	JRK	DATE: 02/09/04	SCALE: NTS	SHEET: 2 of 2		
A		ORIGINAL DRAFT	02/09/04	TMB	GAD # HZ0805D102R-10-C	TOOL # -			
REV	DESCRIPTION		DATE	INT					