

Film Capacitors, High Current, Wrap-and-Fill, Metallized Polypropylene



FEATURES

- Wire or lug terminals
- High stability
- High ripple to 30 A
- Low inductance
- Low ESR
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 105 °C

Capacitance Range: 1.0 μF to 30.0 μF

Capacitance Tolerance: ± 10 %, ± 5 %

DC Voltage Rating: 100 WVDC to 400 WVDC

Equivalent Series Resistance: 20 kHz to 100 kHz

Dissipation Factor: 0.1 % maximum
Measured at 1000 Hz, at + 25 °C

 $\Delta V/\Delta T$: 10 V/ms maximum

Voltage Test: 200 % of rated voltage for 2 min

Insulation Resistance: Measured at 100 WVDC after a 2 min charge.

At + 25 °C: 200 000 MΩ/μF, or 400 000 MΩ minimum

Vibration Test (Condition B): No mechanical damage, short, open or intermittent circuits.

DC Life Test: 140 % of rated voltage for 1000 h at + 105 °C.

No visible damage. No open or short circuits.

 Maximum Δ CAP ± 1.0 %

Minimum IR = 50 % of initial limit

Maximum DF = 0.10 %

Humidity Test: 95 % relative humidity at + 40 °C for 250 h. No visible damage.

 Maximum Δ CAP ± 1.0 %

Minimum IR = 20 % of initial limit

Maximum DF = 0.12 %

PHYSICAL CHARACTERISTICS



Pull Test:
Wire Leads: - 5 lb (2.3 kg) for one min. No physical damage.

Terminal Lugs: - 10 lb (4.5. kg) for one min. No physical damage.

Lead Bend: After three complete consecutive bends. No damage.

Marking: Sprague® trademark, type or part number, capacitance and voltage.

DIMENSIONS in inches [millimeters]

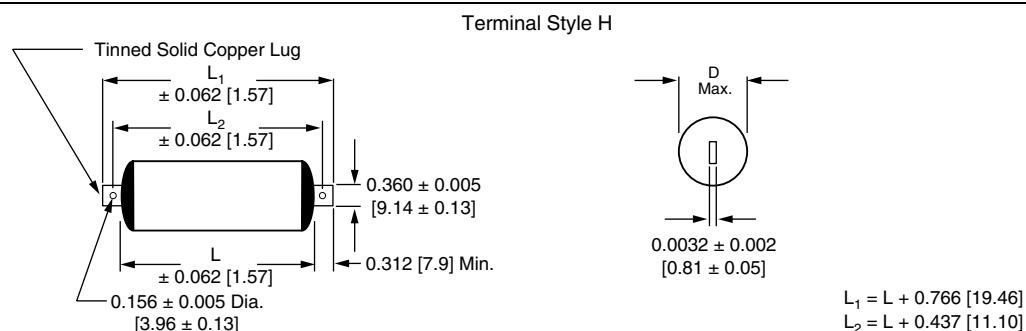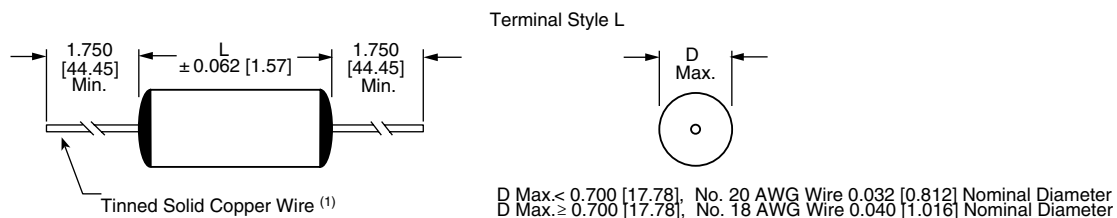

Note ⁽¹⁾ Leads to be within ± 0.062 [1.57 mm] of center line at egress but not less than 0.031" [0.79 mm] from edge (Terminal Style L only).

STANDARD RATINGS in inches [millimeters]											
CAPACITANCE (μF)	PART NUMBER (1)	CASE SIZE		ESR LIMIT (mΩ) 20 kHz to 100 kHz	MAXIMUM RIPPLE CURRENT (A _{RMS}) at 20 kHz - 100 kHz CASE TEMPERATURE at						
		D	L		+25 °C	+35 °C	+45 °C	+55 °C	+65 °C	+75 °C	+85 °C
Terminal Style L - Units with Wire Leads											
100 WVDC											
1.0	V-735P105X9100L	0.531 [13.49]	0.750 [19.05]	15.0	9.2	8.5	7.8	7.0	6.0	4.9	4.5
2.0	V-735P205X9100L	0.596 [15.14]	0.938 [23.81]	12.0	10.8	10.0	9.1	8.2	7.0	5.8	5.3
3.0	V-735P305X9100L	0.717 [18.21]	0.938 [23.81]	11.0	12.1	11.2	10.3	9.2	8.0	6.5	5.9
5.0	V-735P505X9100L	0.733 [18.62]	1.250 [31.75]	10.0	13.8	12.7	11.6	10.4	9.0	7.4	6.7
10.0	V-735P106X9100L	0.898 [22.81]	1.500 [38.10]	9.0	15.0	15.0	14.2	12.7	11.0	9.0	8.2
20.0	V-735P206X9100L	1.000 [25.40]	2.250 [57.15]	8.0	15.0	15.0	15.0	15.0	13.6	11.1	10.0
30.0	V-735P306X9100L	1.200 [30.48]	2.250 [57.15]	6.0	15.0	15.0	15.0	15.0	15.0	12.4	11.4
200 WVDC											
1.0	V-735P105X9200L	0.512 [13.01]	1.250 [31.75]	20.0	7.3	7.3	7.3	7.3	7.2	5.9	5.4
2.0	V-735P205X9200L	0.698 [17.73]	1.250 [31.75]	15.0	12.0	12.0	11.3	10.1	8.7	7.1	6.5
3.0	V-735P305X9200L	0.747 [18.97]	1.500 [38.10]	13.0	15.0	13.8	12.6	11.3	9.8	8.0	7.3
5.0	V-735P505X9200L	0.862 [21.89]	1.750 [44.45]	11.0	15.0	15.0	14.7	13.1	11.4	9.3	8.5
10.0	V-735P106X9200L	1.030 [26.16]	2.250 [57.15]	9.0	15.0	15.0	15.0	15.0	13.8	11.3	10.3
20.0	V-735P206X9200L	1.440 [36.58]	2.250 [57.15]	6.0	15.0	15.0	15.0	15.0	15.0	14.1	12.8
400 WVDC											
1.0	V-735P105X9400L	0.713 [18.11]	1.500 [38.10]	19.0	9.5	9.5	9.5	9.5	9.5	7.8	7.1
2.0	V-735P205X9400L	0.895 [22.73]	1.750 [44.45]	15.0	15.0	15.0	15.0	13.4	11.6	9.5	8.7
3.0	V-735P305X9400L	1.086 [27.58]	1.750 [44.45]	12.0	15.0	15.0	15.0	15.0	13.1	10.7	9.8
5.0	V-735P505X9400L	1.192 [30.28]	2.250 [57.15]	10.0	15.0	15.0	15.0	15.0	15.0	12.5	11.4
10.0	V-735P106X9400L	1.668 [42.37]	2.250 [57.15]	6.0	15.0	15.0	15.0	15.0	15.0	15.0	14.1
Terminal Style H - Units with Terminal Lugs											
100 WVDC											
1.0	V-735P105X9100H	0.531 [13.49]	0.875 [22.23]	15.0	10.3	9.5	8.7	7.8	6.7	5.5	5.0
2.0	V-735P205X9100H	0.596 [15.14]	1.062 [26.97]	12.0	12.0	11.0	10.0	8.9	7.8	6.3	5.8
3.0	V-735P305X9100H	0.717 [18.21]	1.062 [26.97]	11.0	13.3	12.3	11.2	10.0	8.7	7.1	6.5
5.0	V-735P505X9100H	0.733 [18.62]	1.375 [34.93]	10.0	14.8	13.7	12.5	11.2	9.7	7.9	7.2
10.0	V-735P106X9100H	0.898 [22.81]	1.625 [41.28]	9.0	17.8	16.5	15.0	13.5	11.7	9.5	8.7
20.0	V-735P206X9100H	1.000 [25.40]	2.375 [60.33]	8.0	21.6	20.0	18.3	16.4	14.2	11.6	10.6
30.0	V-735P306X9100H	1.200 [30.48]	2.375 [60.33]	6.0	24.3	22.5	20.5	18.4	15.9	13.0	11.9
200 WVDC											
1.0	V-735P105X9200H	0.512 [13.00]	1.375 [34.93]	20.0	7.3	7.3	7.3	7.3	7.3	6.4	5.8
2.0	V-735P205X9200H	0.698 [17.73]	1.375 [34.93]	15.0	14.3	13.3	12.1	10.8	9.4	7.7	7.0
3.0	V-735P305X9200H	0.747 [18.97]	1.625 [41.28]	13.0	15.9	14.7	13.5	12.0	10.4	8.5	7.8
5.0	V-735P505X9200H	0.862 [21.89]	1.875 [47.63]	11.0	18.3	17.0	15.5	13.9	12.0	9.8	8.9
10.0	V-735P106X9200H	1.030 [26.16]	2.375 [60.33]	9.0	22.4	20.7	18.9	16.9	14.6	12.0	10.9
20.0	V-735P206X9200H	1.440 [36.58]	2.375 [60.33]	6.0	27.4	25.4	23.2	20.7	17.9	14.7	13.4
400 WVDC											
1.0	V-735P105X9400H	0.713 [18.11]	1.625 [41.28]	19.0	9.5	9.5	9.5	9.5	9.5	8.3	7.5
2.0	V-735P205X9400H	0.895 [22.73]	1.875 [47.63]	15.0	15.0	15.0	15.0	14.2	12.3	10.0	9.1
3.0	V-735P305X9400H	1.086 [27.58]	1.875 [47.63]	12.0	21.1	19.5	17.8	15.9	13.8	11.3	10.3
5.0	V-735P505X9400H	1.192 [30.28]	2.375 [60.33]	10.0	24.4	22.6	20.6	18.5	16.0	13.1	11.9
10.0	V-735P106X9400H	1.668 [42.37]	2.375 [60.33]	6.0	30.0	27.8	25.4	22.7	19.7	16.1	14.7

Notes

- (1) Part Numbers listed are for a capacitance tolerance of ± 10 %. To specify ± 5 % tolerance, change the “X9” in the Part Number to “X5”.
- Other capacitance values and voltage ratings are available upon request

ORDERING INFORMATION				
V-735P	105	X9	100	L
TYPE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING	TERMINAL STYLE
	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	X9 = ± 10 % X5 = ± 5 %	This is expressed in volts.	L = Wire Leads H = Lugs



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.