


D6T Series MEMS Thermal IR Sensor

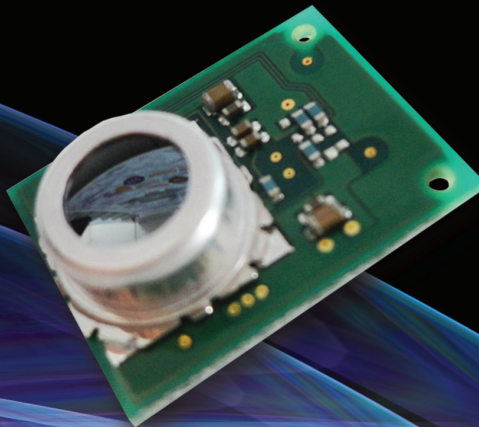

Detection of Stationary Human Presence by Non-contact Temperature Measurement

High Accuracy

Small Size

I²C Digital Output

Temperature Output for Each Pixel

High sensitivity/Low Noise

Variety of Pixel Arrays Available

Hot Spot Detection

Ordering Information

Element type	Model
4 4	D6T-44L-06
1×8	D6T-8L-06

Ratings

Item	Specification
Power supply voltage	4.5 to 5.5 VDC
Storage temperature range	-10 to 60°C (with no icing or condensation)
Operating temperature range	0 to 50°C (with no icing or condensation)
Storage humidity range	85% max. (with no icing or condensation)
Operating humidity range	20% to 85% (with no icing or condensation)

Characteristics

Item	D6T-44L-06		D6T-8L-06
View angle (see note 1)	X direction	44.2°	62.8°
	Y direction	45.7°	6.0°
Object temperature output accuracy (See note 2)	Accuracy 1	±1.5°C max. Measurement conditions: $V_{CC} = 5.0\text{ V}$ (1) $T_x = 25^\circ\text{C}$, $T_a = 25^\circ\text{C}$ (2) $T_x = 45^\circ\text{C}$, $T_a = 25^\circ\text{C}$ (3) $T_x = 45^\circ\text{C}$, $T_a = 45^\circ\text{C}$	
	Accuracy 2	±3.0°C max. Measurement conditions: $V_{CC} = 5.0\text{ V}$ (4) $T_x = 25^\circ\text{C}$, $T_a = 45^\circ\text{C}$	
Current consumption	5 mA typical		

Functions


Item	Specification
Object temperature detection range (see note 2)	5 to 50°C
Reference temperature detection range (see note 2)	5 to 45°C
Output specifications	Digital values that correspond to the object temperature (T_x) and reference temperature (T_a) are output from a serial communications port.
Output form	Binary code (10 times the detected temperature (°C))
Communications form	I ² C compliant
Temperature resolution (NETD)	0.14°C

- Note: 1. Refer to Field of View Characteristics in the Engineering Data section.
2. Refer to Object Temperature Detection Range in the Engineering Data section.


Field of View Characteristics

D6T-44L-06


Field of view in X Direction

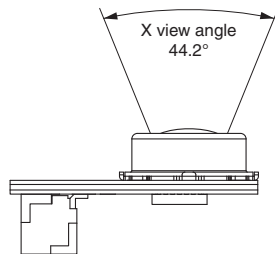

Field of view in Y Direction

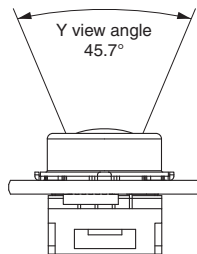


Detection Area for Each Pixel

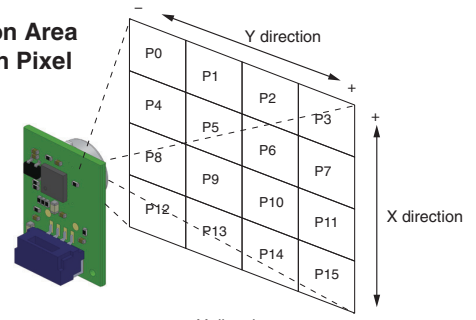


D6T-8L-06


Field of view in X Direction

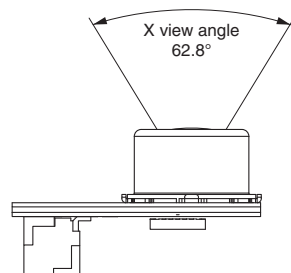

Field of view in Y Direction

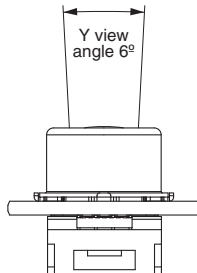

Detection Area for Each Pixel

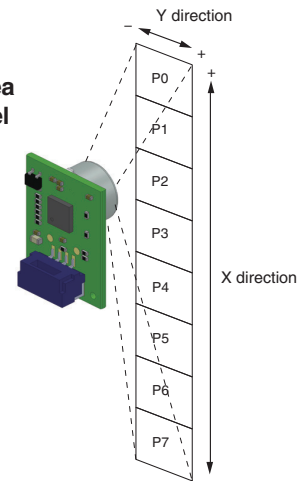

Note: Definition of view angle: Using the maximum Sensor output as a reference, the angular range where the Sensor output is 50% or higher when the angle of the Sensor is changed is defined as the view angle.

Note: Additional information can be found on the Omron website

Phone: 847-882-2288

www.components.omron.com

©2013 Omron Electronic Components LLC, Printed in U.S.A. 5/2013

OMRON
ELECTRONIC COMPONENTS