AC Filter 2-Stage



Description

- Chassis:

- Screw-on mounting, from top
- Line-filter in standard version, 2 positions, high attenuation
- Quick connect terminals 6.3 x 0.8 mm
- High symmetrical and asymmetrical attenuation in the frequency range from 10kHz up to 30MHz

Approvals

- VDE Certificate Number: 40004673
- UL File Number: E72928





Characteristics

- Designed for increased requirements
- Protection against interference voltage from the mains
 Possible interferences generated in the equipment are strongly attenuated
- 2-stage line filter with increased attenuation
- For standard and industrial applications
- Suitable for use in equipment according to IEC/UL 60950

References

Alternative: Standard version

Weblinks

pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product

Technical Data


Ratings IEC	2 - 6A @ Ta 40 °C / 250 VAC; 50 Hz					
Ratings UL/CSA	2 - 6A @ Ta 40 °C / 125 VAC; 60 Hz					
Leakage Current	standard < 0.5 mA (250 V / 60 Hz)					
Dielectric Strength	> 1.7 kVDC between L-N					
-	> 2.7 kVDC between L/N-PE					
	Test voltage (2 sec)					
Allowable Operation Temp.	-25 °C to 100 °C					
Climatic Category	25/100/21 acc. to IEC 60068-1					
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140					
Terminal	Quick connect terminals 6.3 x 0.8 mm					
Material: Housing	Aluminum					

Line Filter	Standard Version, IEC 60939, UL 1283, CSA C22.2 no. 8
	Technical Details
MTBF	> 200'000h acc. to MIL-HB-217 F

FMW-52

Dimension


Case 09

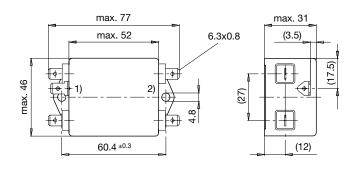

1) Line 2) Load

Diagrams

Standard version

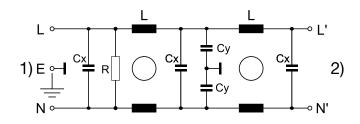


1) Line 2) Load

Attenuation Loss Standard version

2 A

6 A

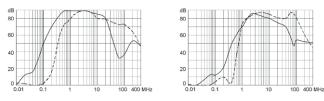

All Variants

Rated Current [A]	Filter-Type	L (mH)	Cx (X2) [nF]	Cy (Y2) [nF]	R [Μ Ω]	Weight [g]	Housing	Order Number	
2	Standard Version	2 x 3	100	4.7	0.5	140 g	09	5500.2043	
6	Standard Version	2 x 0.8	100	2.2	0.5	140 g	09	5500.2044	

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

10 Pcs Packaging unit



The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.

- - - - differential mode _____ common mode