



Features:

- · Micro processor-controlled ESD safe unit
- Fast heating response
- Easy-to-adjust temperature and airflow control with digital display
- Built-in temperature sensor that aids in providing stable (temperature)
 measurements
- Built-in thermal protector
- · Wide range of operating temperature and airflow level selection
- · Integrated airflow gauge for precise airflow level adjustment
- Unique sleep mode with timer functionality
- Automatic cooling functionality for safety and added protection
- Compatibility with various types of air nozzles to meet different repairing requirements
- · The package includes both UK and Euro cords

Specifications:


Station Size (mm)	188 (W) × 127 (L) × 244 (D)	
Weight	3.8Kg	
Voltage	110-220V AC/ 50-60Hz	
Power consumption	500W	
Temperature Range	100°C to 480°C	
Heating Element Type	Metal Heating Core	
Pump/Motor Type	Diaphragm Special-Purpose Lathe Pump	
Air Capacity	23 l/min (Max.)	
Standard Plug	C type	
Accessories	4 pcs Air Nozzles	
	Hot Air Gun Holder	
	IC Popper	
	Power Cord	
	Vacuum Suction Pen	
	Instruction Manual	
Individual packing	Plain Box	

www.element14.com www.farnell.com www.newark.com www.cpc.co.uk www.mcmelectronics.com





Panel Controls:

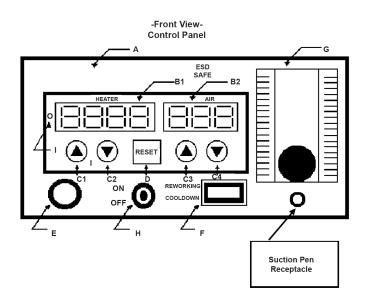

Legend:

- A Product Name
- B1 Temperature Meter
- B2 Airflow Level Meter
- C1 Temperature Control (Up)
- C2 Temperature Control (Down)
- C3 Airflow Control (Up)
- C4 Airflow Control (Down)
- D Reset Button
- E Hot Air Output
- F Hot Air Gun Switch
- G Airflow Gauge
- H Power Switch
- I Temperature Adjustment Indicator

Part Number Table

Description	Part Number
Rework Station, 500W, 110V/220V, UK+EU	SS-952BC-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Terma is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com www.cpc.co.uk www.mcmelectronics.com







Features and Benefits:

- The patented ball joint allows you to rotate your project a full 360 degrees and lock it at any angle
- Multiple positions for convenience and easier access
- 3" jaw opening holds a wide range of items
- Removable rubber jaw covers wide range of applications for protecting delicate finishes
- The large C-clamp mount attaches to work surfaces up to 2 3/8" thick also suitable for heavy duty applications
- Wide range of applications
- Lightweight and very strong
- Protects delicate finishes

Target Users: Technicians, Electricians, Mechanics, Hobbyists, and DIY'ers

Applications: Traditional vice applications, assembly works, arts & crafts, electronics and model building

2311402 + 1696668 = BUNDLE (MFR PART NUMBER 24490622)