

CAB-232MT and CAB-232FC EIA/TIA-232 Serial Cable Specifications

Document ID: 46800

Contents

Introduction

Prerequisites

- Requirements

- Components Used

- Conventions

EIA/TIA-232 Speed and Distance Limitations

Serial Cable CAB-232MT

- EIA/TIA-232 Serial Cable Assembly

- EIA/TIA-232 DTE Cable Pinouts

Serial Cable CAB-232FC

EIA/TIA-232 DCE Cable Pinouts (DB-60 to DB-25)

Related Information

Introduction

This document provides the technical specifications for the EIA/TIA-232 serial cables.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

This document is not restricted to specific software and hardware versions.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

For more information on document conventions, see the Cisco Technical Tips Conventions.

EIA/TIA-232 Speed and Distance Limitations

As with all signaling systems, EIA/TIA-232 signals can travel a limited distance at any given bit rate; generally, the slower the data rate, the greater the distance.

The table below gives the EIA/TIA-232 speed and distance limitations.

Data Rate (Baud)	Distance (Feet)	Distance (Meters)
2400	200	60
4800	100	30
9600	50	15
19200	50	15
38400	50	15
57600	25	7.6
115200	12	3.7

Serial Cable CAB-232MT

This section presents the cable assembly and pinouts for the CAB-232MT serial cable.


Note: The cable itself identifies the Cisco router as a data terminal equipment (DTE) or data communications equipment (DCE) device to other devices in the network; for this reason, it is important to select the correct product number from the table below.



The cable gender for this product (part number 72-0793-01) is Male – Male, mode – DTE.

The CAB-232MT cable is used in the Cisco 7000 family, Cisco 4000 series, Cisco 3600 series, Cisco 2500 series, Cisco 1600 series, Cisco access servers, and AccessPro PC cards. This cable has a male DB-60 connector on the Cisco end and a male DB-25 connector on the network end.

EIA/TIA-232 Serial Cable Assembly

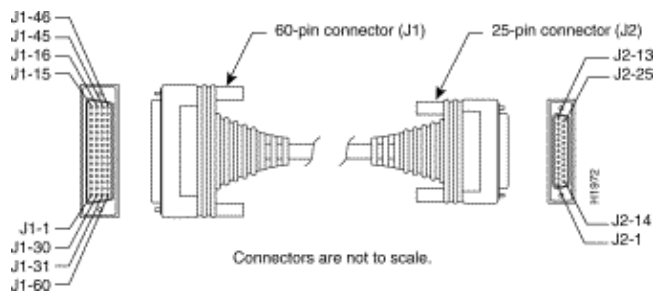

EIA/TIA-232 DTE Cable Pinouts

The table below shows the EIA/TIA-232 **DTE** cable pinouts (DB-60 to DB-25).

Note: The arrows indicate signal direction:

- ----> indicates DTE to DCE
- <---- indicates DCE to DTE

60 Pin ¹	Signal	Description	Direction	25 Pin	Signal
			—	—	—

J1-50	MODE_0	Shorting			
J1-51	GND	group			
J1-52	MODE_DCE				
J1-46	Shield GND	Single	–	J2-1	Shield GND
J1-41					
Shield	TxD/RxD –	Twisted pair	----> –	J2-2	TxD –
J1-36		no. 5		Shield	
Shield	RxD/TxD –	Twisted pair	<---- –	J2-3	RxD –
J1-42		no. 9		Shield	
Shield	RTS/CTS –	Twisted pair	----> –	J2-4	RTS –
J1-35		no. 4		Shield	
Shield	CTS/RTS –	Twisted pair	<---- –	J2-5	CTS –
J1-34		no. 10		Shield	
Shield	DSR/DTR –	Twisted pair	<---- –	J2-6	DSR –
J1-45		no. 11		Shield	
Shield	Circuit GND	Twisted pair	– –	J2-7	Circuit
J1-33		no. 1		Shield	GND –
Shield	DCD/LL –	Twisted pair	<---- –	J2-8	DCD –
J1-37		no. 12		Shield	
Shield	TxC/NIL –	Twisted pair	<---- –	J2-15	TxC –
J1-38		no. 8		Shield	
Shield	RxC/TxCE –	Twisted pair	<---- –	J2-17	RxC –
J1-44		no. 7		Shield	
Shield	LL/DCD –	Twisted pair	----> –	J2-18	LTST
J1-43		no. 2		Shield	–
Shield	DTR/DSR –	Twisted pair	----> –	J2-20	DTR –
J1-39		no. 3		Shield	
Shield	TxCE/TxC –	Twisted pair	----> –	J2-24	TxCE
		no. 6		Shield	–

¹Any pin not referenced is not connected.

Serial Cable CAB-232FC

This section presents the cable assembly and pinouts for the CAB-232FC serial cable.

The cable gender for this product (part number 72-0794-01) is Male DB-60 to Female DB-25, mode – DCE.



This cable is used in the following systems: the Cisco 7000 family, Cisco 4000 series, Cisco 3600 series, Cisco 2500 series, Cisco 1600 series, Cisco access servers, and AccessPro PC cards. This cable has a male DB-60 connector on the Cisco end and a female DB-25 connector on the network end.

EIA/TIA-232 DCE Cable Pinouts (DB-60 to DB-25)

The table below shows the EIA/TIA-232 **DCE** cable pinouts (DB-60 to DB-25).

Note: The arrows indicate signal direction:

- ---> indicates DTE to DCE
- <--- indicates DCE to DTE

60 Pin	Signal	Description	Direction	25 Pin	Signal
J1-50 J1-51	MODE_0	Shorting	=	=	=
J1-46	GND Shield GND	group Single	-	J2-1	Shield GND
J1-36 Shield	RxD/TxD =	Twisted pair no. 9	<---=	J2-2	TxD =
J1-41 Shield	TxD/RxD =	Twisted pair no. 5	--->=	J2-3	RxD =
J1-35 Shield	CTS/RTS =	Twisted pair no. 10	<---=	J2-4	RTS =
J1-42 Shield	RTS/CTS =	Twisted pair no. 4	--->=	J2-5	CTS =
J1-43 Shield	DTR/DSR	Twisted pair	--->=	J2-6	DSR =
J1-45 Shield	- Circuit	Twisted pair	=	J2-7	Circuit
J1-44 Shield	GND - LL/DCD =	Twisted pair no. 1	--->=	J2-8	GND DCD =
J1-39 Shield	TxCE/TxC	Twisted pair no. 2	--->=	J2-15	TxC =
J1-40 Shield	- NIL/RxC =	Twisted pair no. 7	--->=	J2-17	RxC =
J1-33 Shield	DCD/LL =	Twisted pair no. 6	<---=	J2-18	LTST
J1-34 Shield	DSR/DTR	Twisted pair no. 12	<---=	J2-20	DTR =
J1-38 Shield	- RxC/TxCE	Twisted pair no. 11	<---=	J2-24	TxCE
-		no. 8		Shield	-

Related Information

- [Cisco Cable Product Numbers, Part Numbers, and Descriptions](#)
- [Technical Support – Cisco Systems](#)

