

# PicoScope<sup>®</sup> 9300 Series

## THE NEW FACE OF SAMPLING OSCILLOSCOPES

**20 GHz bandwidth**  
**17.5 ps rise time**

ELECTRICAL, OPTICAL AND TDR/TDT MODELS



Industry's fastest sampling rate  
NRZ and RZ eye plots and measurements  
Serial data mask library and local editing  
Histogramming and statistical measurements  
Mathematics, FFT and custom formulas  
Intuitive Microsoft Windows<sup>®</sup> user interface

Differential 60 ps 6 V step source (PicoScope 9311)  
Differential 40 ps step source (PicoScope 9312)  
Clock recovery (PicoScope 9302 and 9321)  
Optical-electrical converter (PicoScope 9321)  
Up to 4 input channels (PicoScope 9341)

### APPLICATIONS

Serial data pre-compliance testing  
Telecom service and manufacturing  
High-speed digital cable testing  
High-resolution timing and phase analysis  
Digital system and transmission measurements  
Automated pass/fail mask test  
Fast pulse, logic, port, and semiconductor characterization


2 or 4 input channels	16 bit input resolution	2.5 GHz trigger	±1 V input range	40 or 60 ps TDR/TDT step	5 ps/div dual timebase
1 MS/s sampler	60 dB dynamic range	14 GHz trigger prescaler	11.3 Gb/s clock recovery	9.5 GHz optical bandwidth	64 fs effective resolution

## Sequential sampling oscilloscopes

The PicoScope 9300 Series oscilloscopes use triggered sequential sampling to capture high-bandwidth repetitive or clock-derived signals. Compared with very high-speed clocked sampling systems such as real-time oscilloscopes, sampling oscilloscopes cost less and achieve a lower jitter and a higher timing resolution.

## 20 GHz electrical bandwidth

The 20 GHz bandwidth allows measurement of 17.5 ps transitions, while the very low sampling jitter supports a time resolution as short as 64 fs. The sequential sampling rate of 1 MS/s, unsurpassed by any other sampling oscilloscope, allows the fast building of waveforms, eye diagrams and histograms.

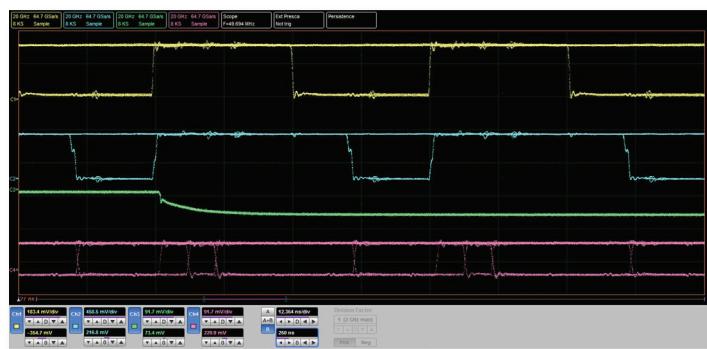

## Multiple sampling modes

### Sequential time sampling (STS) mode

The oscilloscope samples after each trigger event with a regularly incrementing delay derived from an internal triggerable oscillator. Jitter is 1.8 ps typical, 2.0 ps maximum. The 1 MS/s sampling rate, the highest of any sampling scope, builds waveforms and persistence displays faster.

### Eye mode


A variation of STS mode in which sampling is controlled by the external prescaled trigger. Jitter is reduced even with long time delays.

### TDR/TDT mode

The oscilloscope acquires one sample per internal trigger independent of timebase settings. The delay is generated by a precise internal clock oscillator.

### Real-time, random equivalent time sampling and roll modes

Uniquely, there is a 100 MHz bandwidth trigger pick-off within the main sampler (channels 1 and 2). The PicoScope 9300 scopes can therefore operate similarly to a traditional DSO in roll, transient capture and ETS modes. Signals up to 100 MHz are conveniently displayed without the need for a separately derived trigger signal.

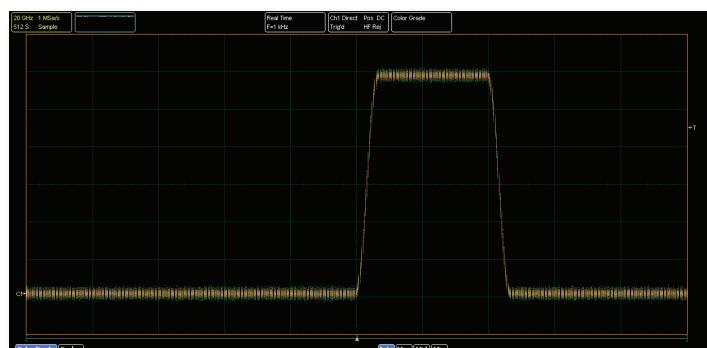

## 2.5 GHz direct external trigger

The scopes are equipped with a built-in direct external trigger for signals up to 2.5 GHz repetition rate.

## 14 GHz prescaled trigger

Trigger bandwidth is extended to 14 GHz by a built-in prescaler for the external trigger.

## Built-in 11.3 Gb/s clock data recovery trigger

To support serial data applications in which the data clock is not available as a trigger, PicoScope 9302 and 9321 include a clock recovery module to regenerate the data clock from the incoming serial data. A divider accessory kit is included to route the signal to both the clock recovery and oscilloscope inputs.




## Eye-diagram analysis

The PicoScope 9300 Series scopes quickly measure more than 30 fundamental parameters used to characterize non-return-to-zero (NRZ) signals and return-to-zero (RZ) signals. Up to ten parameters can be measured simultaneously, with comprehensive statistics also shown.


The measurement points and levels used to generate each parameter can optionally be drawn on the trace.

Eye diagram analysis can be made even more powerful with the addition of mask testing, as described opposite.

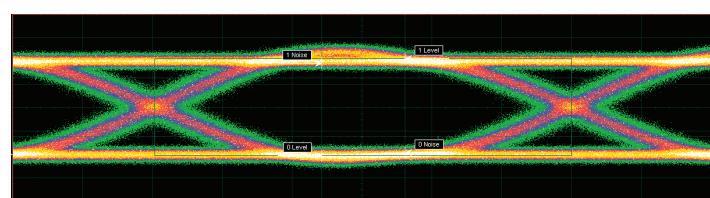

## Pattern sync trigger and eye line mode

The pattern sync trigger, derived from bit rate, pattern length, and trigger divide ratio can build up an eye pattern from any specified group of bits in a sequence.

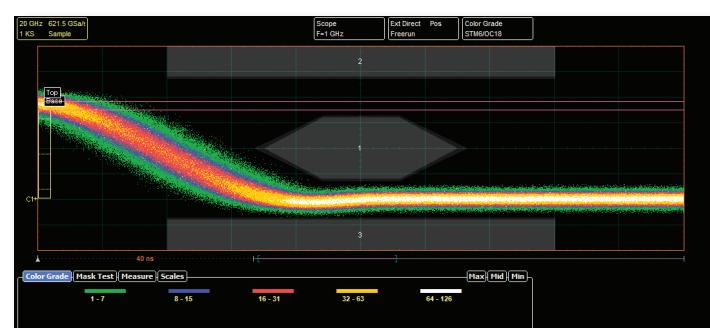


## Mask testing

Eye-diagram masks are used to give a visual indication of deviations from a standard waveform. There is a library of 167 built-in masks, and custom masks can be automatically generated and modified using the graphical editor. A specified margin can be added to any mask to enable stress-testing.

The display can be grey-scaled or colour-graded to aid in analyzing noise and jitter in eye diagrams. There is also a statistical display showing a failure count for both the original mask and the margin.


The extensive menu of built-in test waveforms is invaluable for checking your mask test setup before using it on live signals.

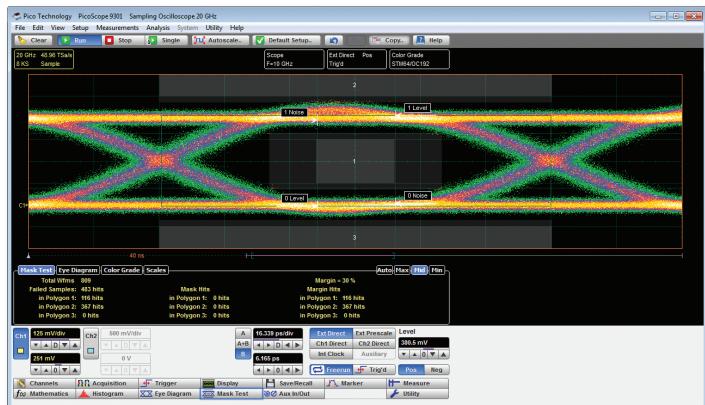

## 9.5 GHz optical model

The PicoScope 9321 includes a built-in, precision optical-to-electrical converter. With the converter output routed to one of the scope inputs (optionally through an SMA pulse shaping filter), the PicoScope 9321 can analyze standard optical communications signals such as OC48/STM16, 4.250 Gb/s Fibre Channel and 2xGb Ethernet. The scope can perform eye pattern measurements with automatic measurement of optical parameters including extinction ratio, S/N ratio, eye height and eye width. With its integrated clock recovery module, the scope is usable to 11.3 Gb/s.

The converter input accepts both single-mode (SM) and multi-mode (MM) fibers and has a wavelength range of 750 to 1650 nm.

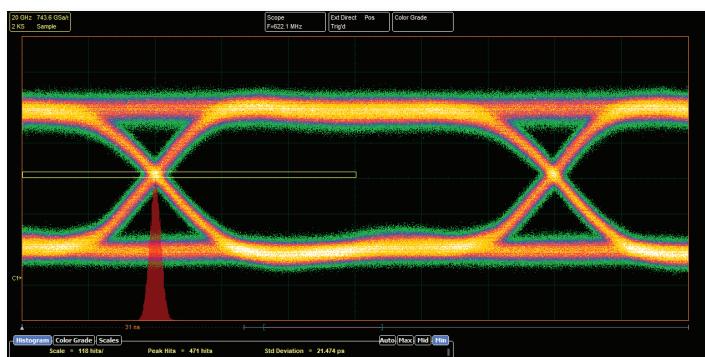


## Mask test features


- Failure count
- User-defined margins
- Count fails
- Built-in standard test waveforms
- Stop on fail

## TDR/TDT analysis


The PicoScope 9311 and 9312 scopes include a built-in differential step generator for time-domain reflectometry and time-domain transmission measurements. This feature can be used to characterize transmission lines, printed circuit traces, connectors and cables with as little as 15 mm resolution.

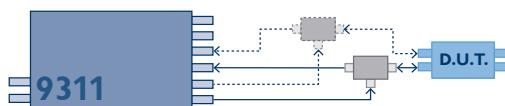


TDR

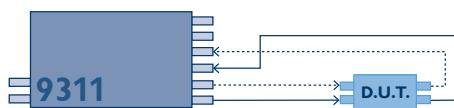

TDT

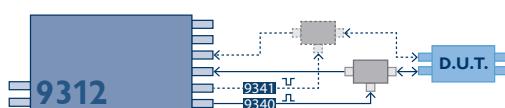

TDR

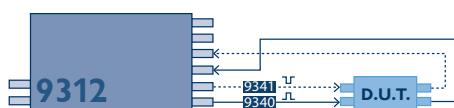

TDT



The PicoScope 9312 is supplied with the 9040 and 9041 external tunnel diode pulse heads that generate positive and negative 200 mV steps with 40 ps rise time. The PicoScope 9311 generates large-amplitude (6 V) differential 60 ps steps with 65 ps rise time directly from its front panel and is suited to TDR/TDT applications where the reflected or transmitted signal is small.

The PicoScope 9300 Series TDR/TDT models include source deskew with 1 ps resolution and comprehensive calibration, reference plane and measurement functions. Voltage, impedance or reflection coefficient ( $\rho$ ) can be plotted against time or distance.

The PicoScope 9311 and 9312 are supplied with a comprehensive set of calibrated accessories to support your TDR/TDT measurements. These include cables, signal dividers, adaptors, attenuator and reference load and short. See back page for ordering details.



PicoScope 9312 with 9040 and 9041 pulse heads

Internal construction of pulse head

## Designed for ease of use


The PicoSample 3 software reserves as much space as possible for the most important information: your signal. Below that is a selection of the most important buttons. For more complex adjustments, a single mouse-click will display additional menus in left and right side panels. Most controls and numeric entry fields have keyboard shortcuts.

Hardware zoom using the dual timebase is made easy: simply use the mouse to draw a zoom box over a part of the waveform. You can still set up the timebase using manual dual-timebase controls if you prefer.

## Compact, portable USB instruments

These units occupy very little space on your workbench and are small enough to carry with your laptop for on-site testing, but that's not all. Instead of using remote probe heads attached to a large bench-top unit, you can now position the scope right next to the device under test. Now all that lies between your scope and the DUT is a short, low-loss coaxial cable.

Everything you need is built into the oscilloscope, with no expensive hardware or software add-ons to worry about.

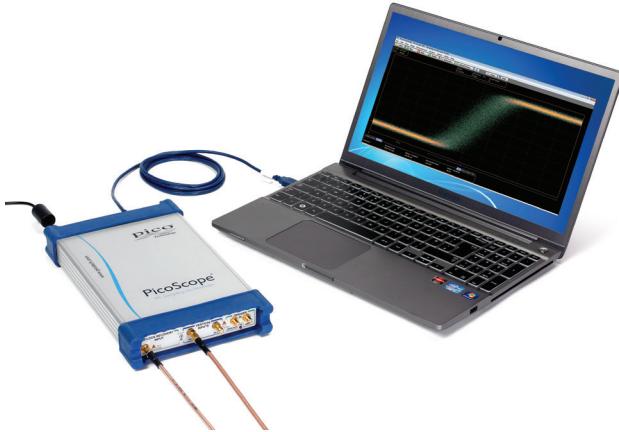

## Measurement of over 100 waveform parameters with and without statistics

The PicoScope 9300 Series scopes quickly measure well over 100 parameters, so you don't need to count graticules or estimate the waveform's position. Up to ten simultaneous measurements or four statistics measurements are possible. The measurements conform to IEEE standard definitions.

A dedicated frequency counter shows signal frequency at all times, regardless of measurement and timebase settings.



138 automatic measurements

## Built-in signal generator

The scope can generate industry-standard or custom signals including clock, pulse and pseudo-random binary sequence.

These can be used to test the instrument's inputs, experiment with its features and verify complex setups such as mask tests. AUX OUTPUT can also be configured as a trigger output.

## A choice of screen formats


When working with multiple traces, you can display them all on one grid or separate them into two or four grids. You can also plot signals in XY mode with or without additional voltage-time grids. The persistence display modes use color-coding or shading to show statistical variations in the signal.



## Powerful mathematical analysis

The PicoScope 9300 Series scopes support up to four simultaneous mathematical combinations and functional transformations of acquired waveforms.


You can select any of the mathematical functions to operate on either one or two sources. All functions can operate on live waveforms, waveform memories or even other functions. There is an equation editor for creating custom functions.

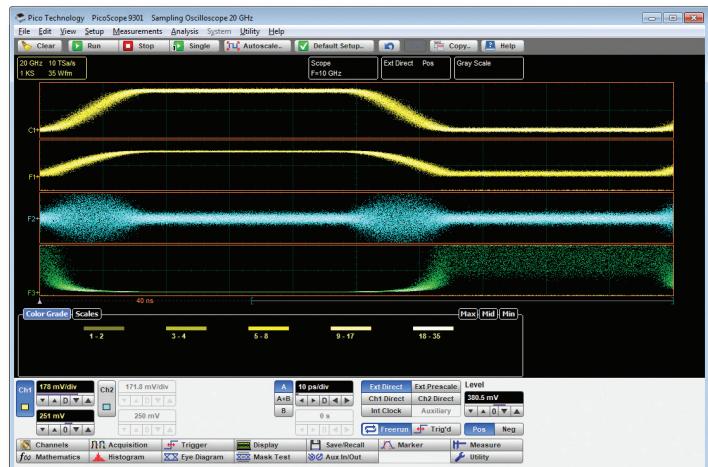


61 math functions

## FFT analysis


All PicoScope 9300 Series oscilloscopes can calculate real, imaginary and complex Fast Fourier Transforms of input signals using a range of windowing functions. The results can be further processed using the math functions. FFTs are useful for finding crosstalk and distortion problems, adjusting filter circuits designed to filter out certain harmonics in a waveform, testing impulse responses of systems, and identifying and locating noise and interference sources.

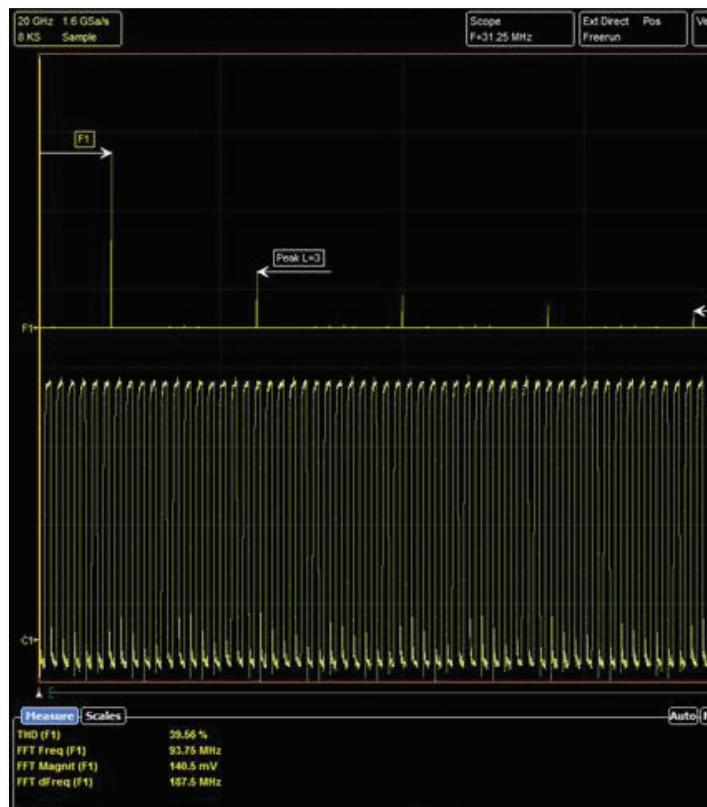

## SMA Bessel-Thomson pulse-shaping filters

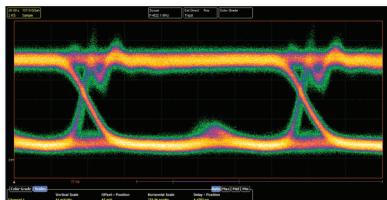

O/E converter output, raw

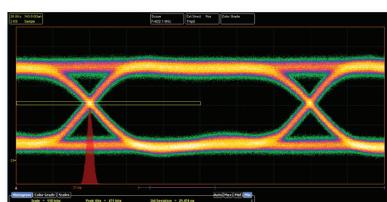


O/E converter output, filtered

A range of Bessel-Thomson filters is available for standard bit rates. These filters are essential for accurate characterization of signals emerging from an optical transmission system. The first eye pattern, above left, shows the ringing typical of an unequalized O/E converter output at 622 Mb/s. The second eye pattern, above right, shows the result of connecting the 622 Mb/s B-T filter. This is an accurate representation of the signal that an equalized optical receiver would see, enabling the PicoScope 9321 to display correct measurements.

## Software Development Kit

The PicoSample 3 software can be operated as a standalone oscilloscope program or as an ActiveX control. The ActiveX control conforms to the Windows COM interface standard and can be embedded in your own software. Unlike more complex driver-based programming methods, ActiveX commands are text strings that can easily be created in any programming environment. Programming examples are provided in Visual Basic (VB.NET), MATLAB, LabVIEW and Delphi, but any programming language or standard that supports the COM interface can be used, including JavaScript and C.



A comprehensive Programmer's Guide is supplied that details every function of the ActiveX control. The SDK can control the oscilloscope over the USB or the LAN port.

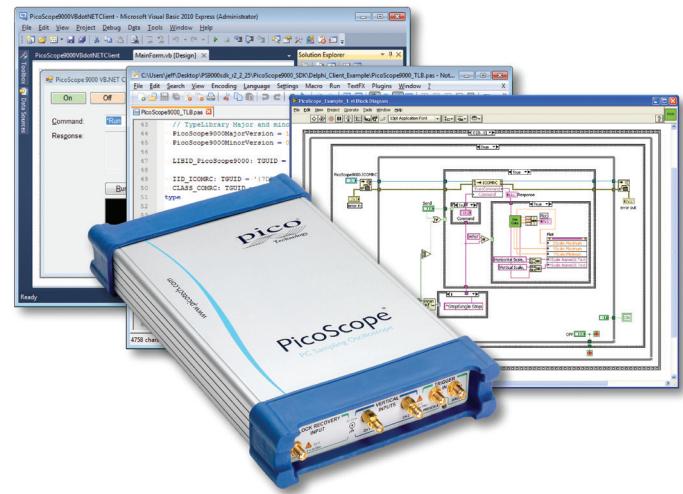

## Histogram analysis




A histogram is a probability graph that shows the distribution of acquired data from a source within a user-definable window. The information gathered by the histogram is used to perform statistical analysis on the source.

Histograms can be constructed on waveforms on either the vertical or horizontal axes. The most common use for a vertical histogram is measuring and characterising noise and pulse parameters, while the most common use for a horizontal histogram is measuring and characterizing jitter.

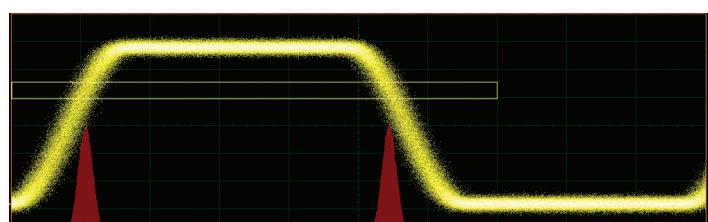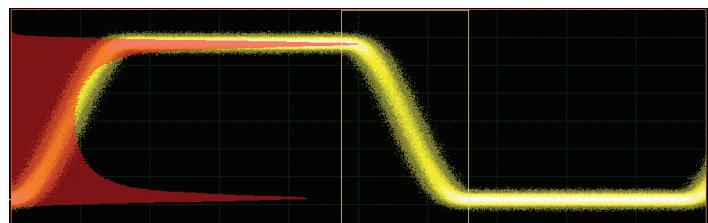

Histogram		Scales	
Scale = 26.9 kHz/	Offset = 0 hits	Peak Hits = 107.482 kHz	Std Deviation = 3.6774 ps
Hits in Box = 5.61958 Mhits	Pk-Pk = 29.8 ps	Mean ± 1 StdDev = 67.014 ps	Mean ± 2 StdDev = 97.012 %
Waveforms = 109468 Wfms	Median = 81.9 ps	Mean ± 3 StdDev = 99.962 %	Max = 96.8 ps
Min = 67 ps	Mean = 81.776 ps	Max-Max = 0 s	Max = 96.8 ps

## PicoScope 9300 Series inputs and outputs

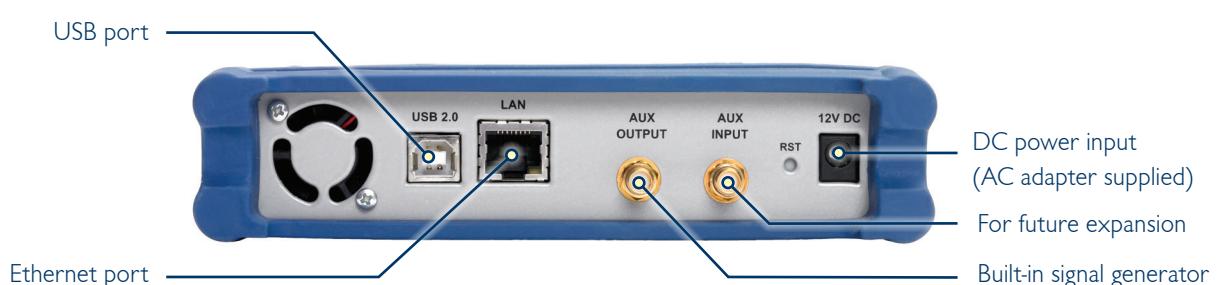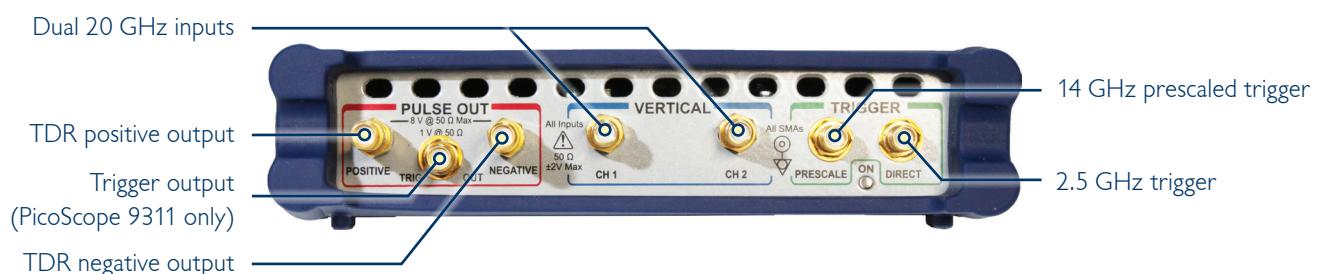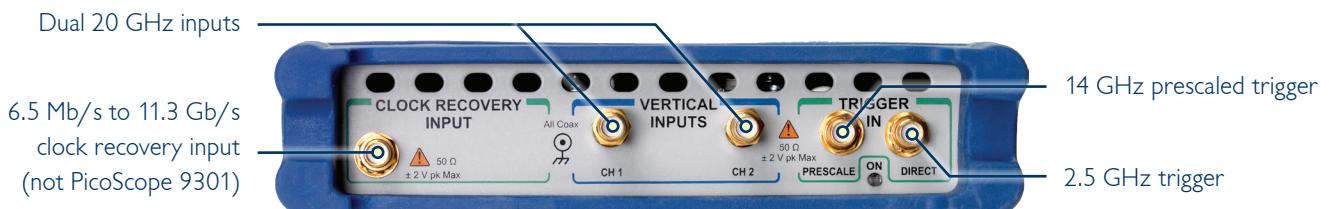

Rear panel

# PicoScope 9300 Series Specifications

## VERTICAL

Number of channels	All models except PicoScope 9341: 2 PicoScope 9341: 4
Acquisition timing	Selectable simultaneous or alternate acquisition
Bandwidth, full	DC to 20 GHz
Bandwidth, narrow	DC to 10 GHz
Pulse response rise time, full bandwidth	17.5 ps (10% to 90%, calculated)
Pulse response rise time, narrow bandwidth	35 ps (10% to 90%, calculated)
Noise, full bandwidth	< 1.5 mV RMS typical, < 2 mV RMS maximum
Noise, narrow bandwidth	< 0.8 mV RMS typical, < 1.1 mV RMS maximum
Noise with averaging	100 µV RMS system limit, typical
Operating input voltage with digital feedback	1 V p-p with ±1 V range (single-valued)
Operating input voltage without digital feedback	±400 mV relative to channel offset (multi-valued)
Sensitivity	1 mV/div to 500 mV/div in 1-2-5 sequence with 0.5% fine increments
Resolution	16 bits, 40 µV/LSB
Accuracy	±2% of full scale ±2 mV over temperature range for stated accuracy (assuming temperature-related calibrations are performed)
Nominal input impedance	(50 ± 1) Ω
Input connectors	2.92 mm (K) female, compatible with SMA and PC3.5

## TIMEBASE (SEQUENTIAL TIME SAMPLING MODE)

Ranges	5 ps/div to 3.2 ms/div (main, intensified, delayed, or dual delayed)
Delta time interval accuracy	For > 200 ps/div: ±0.2% of delta time interval ± 12 ps For ≤ 200 ps/div: ±5% of delta time interval ± 5 ps
Time interval resolution	64 fs
Channel deskew	1 ps resolution, 100 ns max.

## TRIGGERS

Trigger sources	All models: external direct, external prescaled, internal direct and internal clock triggers. PicoScope 9302 and 9321 only: external clock recovery trigger
External direct trigger bandwidth and sensitivity	DC to 100 MHz: 100 mV p-p; to 2.5 GHz: 200 mV p-p
External direct trigger jitter	1.8 ps RMS (typ.) or 2.0 ps RMS (max.) + 20 ppm of delay setting
Internal direct trigger bandwidth and sensitivity	DC to 10 MHz: 100 mV p-p; to 100 MHz: 400 mV p-p (channels 1 and 2 only)
Internal direct trigger jitter	25 ps RMS (typ.) or 30 ps RMS (max.) + 20 ppm of delay setting (channels 1 and 2 only)
External prescaled trigger bandwidth and sensitivity	1 to 14 GHz: 200 mV p-p to 2 V p-p
External prescaled trigger jitter	1.8 ps RMS (typ.) or 2.0 ps RMS (max.) + 20 ppm of delay setting
Pattern sync trigger clock frequency	10 MHz to 11.3 GHz
Pattern sync trigger pattern length	7 to 8 388 607 (2 <sup>23</sup> -1)

## CLOCK RECOVERY (PICOSCOPE 9302 AND 9321)

Clock recovery trigger data rate and sensitivity	6.5 Mb/s to 100 Mb/s: 100 mV p-p > 100 Mb/s to 11.3 Gb/s: 20 mV p-p
Recovered clock trigger jitter	1 ps RMS (typ.) or 1.5 ps RMS (max.) + 1.0% of unit interval
Maximum safe trigger input voltage	±2 V (DC + peak AC)
Input characteristics	50 Ω, AC coupled
Input connector	SMA (f)

## ACQUISITION

ADC resolution	16 bits
Digitizing rate with digital feedback (single-valued)	DC to 1 MHz
Digitizing rate without digital feedback (multi-valued)	DC to 40 kHz
Acquisition modes	Sample (normal), average, envelope
Data record length	32 to 32 768 points (single channel) in x2 sequence

## DISPLAY

Styles	Dots, vectors, persistence, grey scaling, color grading
Persistence time	Variable or infinite
Screen formats	Auto, single YT, dual YT, quad YT, XY, XY + YT, XY + 2 YT

## MEASUREMENTS AND ANALYSIS

Markers	Vertical bars, horizontal bars (measure volts) or waveform markers
Automatic measurements	Up to 10 at once
Measurements, X parameters	Period, frequency, pos/neg width, rise/fall time, pos/neg duty cycle, pos/neg crossing, burst width, cycles, time at max/min, pos/neg jitter ppm/RMS
Measurements, Y parameters	Max, min, top, base, peak-peak, amplitude, middle, mean, cycle mean, AC/DC RMS, cycle AC/DC RMS, pos/neg overshoot, area, cycle area
Measurements, trace-to-trace	Delay 1R-1R, delay 1F-1R, delay 1R-nR, delay 1F-nR, delay 1R-1F, delay 1F-1F, delay 1R-nF, delay 1F-nF, phase deg/rad/%, gain, gain dB

# PicoScope 9300 Series Specifications

Eye measurements, X NRZ	Area, bit rate, bit time, crossing time, cycle area, duty cycle distortion abs/%, eye width abs/%, rise/fall time, frequency, period, jitter p-p/RMS
Eye measurements, Y NRZ	AC RMS, average power lin/dB, crossing %/level, extinction ratio dB/%/lin, eye amplitude, eye height lin/db, max/min, mean, middle, pos/neg overshoot, noise p-p/RMS one/zero level, p-p, RMS, S/N ratio lin/db
Eye measurements, X RZ	Area, bit rate/time, cycle area, eye width abs/%, rise/fall time, jitter p-p/RMS fall/rise, neg/pos crossing, pos duty cycle, pulse symmetry, pulse width
Eye measurements, Y RZ	AC RMS, average power lin/dB, contrast ratio lin/dB/%, extinction ratio lin/db/%, eye amplitude, eye high lin/db, eye opening, max, min, mean, middle, noise p-p/RMS one/zero, one/zero level, peak-peak, RMS, S/N
Histogram	Vertical or horizontal
<b>MATH FUNCTIONS</b>	
Mathematics	Up to four math waveforms can be defined and displayed
Math functions, arithmetic	+, -, ×, ÷, ceiling, floor, fix, round, absolute, invert, $(x+y)/2$ , $ax+b$
Math functions, algebraic	$e^x$ , $\ln$ , $10^x$ , $\log_{10}$ , $a^x$ , $\log_a$ , $d/dx$ , $\int$ , $x^2$ , $\sqrt{x}$ , $x^3$ , $x^4$ , $\sqrt{x^2+y^2}$
Math functions, trigonometric	$\sin$ , $\sin^{-1}$ , $\cos$ , $\cos^{-1}$ , $\tan$ , $\tan^{-1}$ , $\cot$ , $\cot^{-1}$ , $\sinh$ , $\cosh$ , $\tanh$ , $\coth$
Math functions, FFT	Complex FFT, complex inverse FFT, magnitude, phase, real, imaginary
Math functions, combinatorial logic	AND, NAND, OR, NOR, XOR, NXOR, NOT
Math functions, interpolation	Linear, $\sin(x)/x$ , trend, smoothing
Math functions, other	Custom formula
FFT	Up to two FFTs simultaneously
FFT window functions	Rectangular, Hamming, Hann, Flat-top, Blackman-Harris, Kaiser-Bessel
Eye diagram	Automatically characterizes NRZ and RZ eye patterns based on statistical analysis of waveform
<b>MASK TESTS</b>	
Mask geometry	Acquired signals are tested for fit outside areas defined by up to eight polygons. Standard or user-defined masks can be selected.
Built-in masks, SONET/SDH	OC1/STMO (51.84 Mb/s) to FEC 1071 (10.709 Gb/s)
Built-in masks, Ethernet	1.25 Gb/s 1000Base-CX Absolute TP2 to 10xGB Ethernet (12.5 Gb/s)
Built-in masks, Fibre Channel	FC133 (132.8 Mb/s) to 10x Fibre Channel (10.5188 Gb/s)
Built-in masks, PCI Express	R1.0a 2.5G (2.5 Gb/s) to R2.1 5.0G (5 Gb/s)
Built-in masks, InfiniBand	2.5G (2.5 Gb/s) to 5.0G (5 Gb/s)
Built-in masks, XAUI	3.125 Gb/s
Built-in masks, RapidIO	Level 1, 1.25 Gb/s to 3.125 Gb/s
Built-in masks, SATA	1.5G (1.5 Gb/s) to 3.0G (3 Gb/s)
Built-in masks, ITU G.703	DS1 (1.544 Mb/s) to 155 Mb (155.520 Mb/s)
Built-in masks, ANSI T1.102	DS1 (1.544 Mb/s) to STS3 (155.520 Mb/s)
Built-in masks, G.984.2	XAUI-E Far (3.125 Gb/s)
<b>SIGNAL GENERATOR OUTPUT</b>	
Modes	Pulse, PRBS (NRZ and RZ), 500 MHz clock, trigger out
Period range, pulse mode	8 ns to 524 µs
Bit time range, NRZ/RZ mode	4 ns to 260 µs
NRZ/RZ pattern length	$2^{15}-1$ to $2^{15}-1$
<b>TDR PULSE OUTPUTS</b>	
Number of output channels	2 (1 differential pair)
Output enable	Independent or locked control for each source
Pulse polarity	Channel 1: positive-going from zero volts Channel 2: negative-going from zero volts
Rise time (20% to 80%)	60 ps guaranteed
Amplitude	40 ps guaranteed
Amplitude adjustment	2.5 V to 6 V into 50 Ω
Amplitude accuracy	200 mV typical into 50 Ω
Offset	5 mV increments
Output amplitude safety limit	Fixed
Output pairing	$\pm 10\%$
Period range	90 mV max. into 50 Ω
Period accuracy	Adjustable from 2.5 V to 8 V
Width range	Amplitudes and limit paired or independent
Width accuracy	1 µs to 60 ms
Deskew between outputs	$\pm 100$ ppm
Timing modes	200 ns to 4 µs, 0% to 50% duty cycle
Impedance	$\pm 10\%$ of width $\pm 100$ ns
Connectors on scope	-1 ns to 1 ns typical, in 1 ps increments
Connectors on external pulse heads	-500 ps to 500 ps typical, in 1 ps increments
<b>TDR PRE-TRIGGER OUTPUT</b>	
Polarity	Step, coarse timebase, pulse
Amplitude	50 Ω
Pre-trigger	SMA (f) x 2
Pre-trigger to output jitter	N(m) fitted with N(f)-SMA(m) interseries adaptors
<b>PICOSCOPE 9311</b>	
Positive-going from zero volts	-
700 mV typical into 50 Ω	-
25 ns to 35 ns typical, adjustable in 5 ps steps	-
2 ps max.	-
<b>PICOSCOPE 9312</b>	
Positive-going from zero volts	-
700 mV typical into 50 Ω	-
25 ns to 35 ns typical, adjustable in 5 ps steps	-
2 ps max.	-

# PicoScope 9300 Series Specifications

TDT SYSTEM		PICOSCOPE 9311		PICOSCOPE 9312	
Number of TDT channels		60 ps or less, each polarity	2	40 ps or less, each polarity	
Incident rise time (combined oscilloscope and pulse generator, 10% to 90%)		3 ps + 20 ppm of delay setting, RMS, max.		2.2 ps + 20 ppm of delay setting, RMS, max.	
Jitter		Min. 50 ps or 0.1 x time/div, whichever is greater, typical		Min. 30 ps or 0.1 x time/div, whichever is greater, typical.	
Corrected rise time		Max. 3 x time/div, typical		Max. 3 x time/div, typical.	
Corrected aberrations		$\leq 0.5\%$ typical			
TDR SYSTEM		PICOSCOPE 9311		PICOSCOPE 9312	
Number of channels		60 ps or less, each polarity	2	40 ps or less, each polarity	
Incident step amplitude		50% of input pulse amplitude, typical		25% of input pulse amplitude, typical	
Incident rise time (combined oscilloscope, step generator and TDR kit, 10% to 90%)		65 ps or less @ 50 Ω termination, each polarity		45 ps or less @ 50 Ω termination, each polarity	
Reflected step amplitude, from short or open		Minimum: 50 ps or 0.1 x time/div, whichever is greater, typical.		Minimum: 30 ps or 0.1 x time/div, whichever is greater, typical.	
Reflected rise time (combined oscilloscope, step generator and TDR kit, 10% to 90%)		Maximum: 3 x time/div, typical.		Maximum: 3 x time/div, typical.	
Corrected rise time		$\leq 1\%$ typical		Propagation delay, gain, gain dB	
Corrected aberration					
Measured parameters					
TDR/TDT SCALING		Volts, gain (10 m/div to 100 /div)		Time (40 ns/div longest) or distance (meter, foot, inch)	
TDT vertical scale		Volts, rho (10 mrho/div to 2 rho/div), ohm (1 ohm/div to 100 ohm/div)		Time or distance (meter, foot, inch)	
TDR vertical scale				Propagation velocity (0.1 to 1.0) or dielectric constant (1 to 100)	
Horizontal scale					
Distance preset units					
OPTICAL/ELECTRICAL CONVERTER (PICOSCOPE 9321)					
Bandwidth (-3 dB)		9.5 GHz typical			
Effective wavelength range		750 nm to 1650 nm			
Calibrated wavelengths		850 nm (MM), 1310 nm (MM/SM), 1550 nm (SM)			
Transition time		51 ps typical (10% to 90% calculated from Tr = 0.48/optical BW)			
Noise		4 μW (1310 & 1550 nm), 6 μW (850 nm) maximum @ full electrical bandwidth			
DC accuracy		$\pm 25 \mu\text{W} \pm 10\%$ of full scale			
Maximum input peak power		+7 dBm (1310 nm)			
Fiber input		Single-mode (SM) or multi-mode (MM)			
Fiber input connector		FC/PC			
Input return loss		SM: -24 dB typical			
GENERAL					
Temperature range, operating		9.5 GHz typical		+5 °C to +35 °C	
Temperature range for stated accuracy		750 nm to 1650 nm		Within 2 °C of last autocalibration	
Temperature range, storage		850 nm (MM), 1310 nm (MM/SM), 1550 nm (SM)		-20 °C to +50 °C	
Calibration validity period		51 ps typical (10% to 90% calculated from Tr = 0.48/optical BW)		1 year	
Power supply voltage		4 μW (1310 & 1550 nm), 6 μW (850 nm) maximum @ full electrical bandwidth		+12 V DC $\pm 5\%$	
Power supply current		$\pm 25 \mu\text{W} \pm 10\%$ of full scale		1.7 A max.	
Mains adaptor		+7 dBm (1310 nm)		Universal adaptor supplied	
PC connection		Single-mode (SM) or multi-mode (MM)		USB 2.0 (compatible with USB 3.0)	
LAN connection		FC/PC		10/100 Mbit/s	
PC requirements		SM: -24 dB typical		Windows XP (SP3), Windows Vista, Windows 7 or Windows 8 (not Windows RT)	
Dimensions		MM: -16 dB typical, -14 dB maximum		32-bit or 64-bit	
Weight					
Compliance				170 mm x 260 mm x 40 mm (W x D x H)	
Warranty				1.2 kg max.	
				Pulse heads for PicoScope 9312: 150 g each	
				FCC (EMC), CE (EMC and LVD)	
				2 years (1 year for input sampler)	

More detailed specifications can be found in the *PicoScope 9300 Series User's Guide*, available from [www.picotech.com](http://www.picotech.com).

## PicoScope 9300 Series models compared

	PicoScope 9301	PicoScope 9302	PicoScope 9311	PicoScope 9312	PicoScope 9321	PicoScope 9341
2 x 20 GHz electrical inputs	•	•	•	•	•	
4 x 20 GHz electrical inputs						•
Signal generator output	•	•	•	•	•	•
Differential electrical TDR/TDT capability, 40 ps					•	
Differential electrical TDR/TDT capability, 60 ps			•			
9040 external TDR/TDT positive pulse head				•		
9041 external TDR/TDT negative pulse head				•		
9.5 GHz optical-electrical converter						•
Clock recovery trigger		•			•	
Pattern sync trigger	•	•	•	•	•	•
USB port	•	•	•	•	•	•
LAN port	•	•	•	•	•	•

## Kit contents for all PicoScope 9300 oscilloscopes

Each PicoScope 9300 Series oscilloscope is supplied with the following kit items:

- PicoSample™ 3 software disc
- Quick Start Guide
- Power supply, universal input
- USB 2.0 cable, 1.8 m
- LAN cable, 1 m
- SMA/PC3.5/2.92 wrench
- Storage and carry case



In addition to these standard kit items, each oscilloscope model is also supplied with extra accessories.

Package contents	PicoScope model						Order code	Price		
	9301	9302	9311	9312	9321	9341		GBP	USD	EUR
9300 TDR kit: 80 cm 50 Ω SMA (m-m) cable SMA (f-f) adaptor SMA (m) 50 Ω load SMA (m) short circuit			2	2			PP897	200	330	242
Power divider kit: 3-resistor 6 dB power divider 18 GHz 50 Ω SMA (f-f) 2 x precision coaxial cable 30 cm 50 Ω SMA (m-m)		1	2	2	1		PP899	330	544	399
Connector saver 18 GHz 50 Ω SMA (m-f)	2	2	2	2	2	4	TA170	12	20	15
Attenuator 20 dB 10 GHz 50 Ω SMA (m-f)		2					TA173	45	74	55
N (f)-SMA (m) adaptor				2			TA172	75	124	91



## Ordering information

Model	Channels	Clock recovery	Optical-to-electrical converter	TDR/TDT outputs	Order code	GBP	USD	EUR
PicoScope 9301	2 × 50 Ω 2.92 mm (f)	—	—	—	PP890	9 088	14 995	10 996
PicoScope 9302		11.3 Gb/s			PP891	11 512	18 995	13 930
PicoScope 9311		—		6 V, 60 ps	PP892	11 512	18 995	13 930
PicoScope 9312		—		200 mV, 40 ps	PP893	13 573	22 395	16 423
PicoScope 9321		11.3 Gb/s	9.5 GHz	—	PP894	17 876	29 495	21 630
PicoScope 9341	4 × 50 Ω 2.92 mm (f)	—	—	—	PP895	13 573	22 395	16 423

## Optional accessories

### Probes and attenuators

Description	Order code	GBP	USD	EUR
<b>Passive probe*</b>				
1.5 GHz 50 Ω 10:1 SMA, 1.3 m Tip impedance 500 Ω    2 pF	TA061	199	328	241
<b>Tetris high-impedance 10:1 active probes with 50 Ω SMA(m) output, 1.3 m</b>				
1.5 GHz probe with accessory kit	TA222	657	1085	795
2.5 GHz probe with accessory kit	TA223	1219	2012	1475
<b>Attenuator</b>				
3 dB 10 GHz 50 Ω SMA (m-f)	TA181	30	50	36

\* See [accessories.picotech.com](http://accessories.picotech.com) for details on a range of accessory kits for the TA061 probe.



### Reference optical receiver Bessel-Thomson filters

B-T filters for use with PicoScope 9321. Terminated with 50 Ω SMA (m-f) connectors.

Description	Order code	GBP	USD	EUR
51.8 Mb/s (OC1/STM0)	TA120	80	132	97
155 Mb/s (OC3/STM1)	TA121	80	132	97
622 Mb/s (OC12/STM4)	TA122	80	132	97
1.250 Gb/s (GBE)	TA123	80	132	97
2.488 Gb/s (OC48/STM16)	TA124	80	132	97

All prices are correct at the time of publication. VAT not included.  
Please contact Pico Technology or visit [www.picotech.com](http://www.picotech.com) for the latest prices before ordering.

### UK headquarters:

Pico Technology  
James House  
Colmworth Business Park  
St. Neots  
Cambridgeshire  
PE19 8YP  
United Kingdom

☎ +44 (0) 1480 396395  
📠 +44 (0) 1480 396296  
✉ sales@picotech.com

### US headquarters:

Pico Technology  
320 N Glenwood Blvd  
Tyler  
Texas 75702  
United States

☎ +1 800 591 2796  
📠 +1 620 272 0981  
✉ sales@picotech.com

Errors and omissions excepted. Windows is a registered trade mark of Microsoft Corporation in the United States and other countries. Pico Technology and PicoScope are internationally registered trade marks of Pico Technology Ltd. MM046.en-5. Copyright © 2008-2014 Pico Technology Ltd. All rights reserved.

[www.picotech.com](http://www.picotech.com)

**pico**  
Technology