




**Features:**

- Black conductive bags made from blow molded LDPE with carbon
- The black bag is light tight and effectively avoids accumulation of electric charge on the bag and its contents
- Protects contents from damage of electromagnetic wave and static
- This product can be heat sealed and offers medium level static protection
- Surface resistance is  $10^4$ - $10^6\Omega$



Carbon Loaded Polyethylene

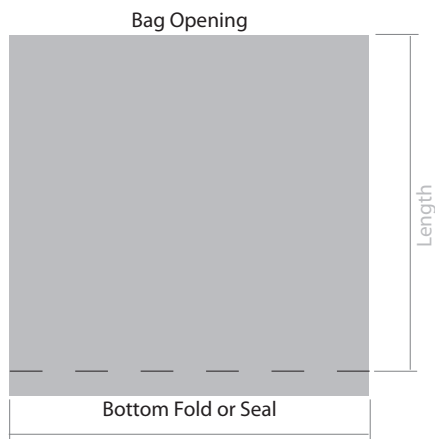

**Construction:**

Our black conductive bags are constructed from a conductive material made out of a 4 mil single layer of carbon loaded polyethylene, creating a Faraday Cage effect.

**Configuration(s):**

Our bags are available in custom sizes or in several industry standard sizes. Bags are offered with a single seal or bottom fold, extruded from a PE tube. The bags are provided with our standard artwork or your company's flexographically printed logo (minimum order qty's apply).

**Standard Bag Artwork:**

Our black conductive bags are produced with the following sample artwork as standard. For further information on bespoke/printed orders, please contact one of our sales team. Please note there is a MOQ of 20,000 bags on all printed bags.

BLACK CONDUCTIVE BAG  
ANT006BCB  
THIS BAG IS ROHS COMPLIANT

**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING ELECTROSTATIC  
DISCHARGE SENSITIVE DEVICES

Product Code:	Description:	Size (inches):	Size (mm):	Notes:
1687835	Conductive Bag	16 x 18	406 x 457.2	Pack of 100 (Ref: 006-0045)

**Important Notice:** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2013.



## Test Conditions:

The following results were taken under the following environmental test conditions:  
 Temperature: 22.1°C / Humidity: 47.8%

## Technical Parameters:

Item:	Test Standard:	Result:
Melt Index	GB3682	2.1 g/10min
Inner / Outer Surface Resistivity	GJB2605-1996	10 <sup>4</sup> - 10 <sup>6</sup> Ω
Static Voltage Attenuation Period	IEC61340-5-1	≤2 secs
Water Absorbtion Rate	GB/96-04-01	0.5%
Density	GB1033	0.92 g/cm
Tensile Strength	GB/96-04-01	MD: 33 MPa TD: 34.85 MPa
Breaking Elongation Rate	GB/96-04-01	MD: 1180% TD: 689%
Friction Coefficient	GB/96-04-01	Outer Surface: 0.08 Us Inner Surface: 0.08 Ud
Heat Seal Temperature	GB/96-04-01	250-375 F
Size	GB/96-04-01	Thickness: ±10% Length: ±3mm Width: ±2mm
Appearance	GB/96-04-01	Black Sheet (No powder or oil)

## Test Conclusion: (Date of Issue: 2009-04-25)

The black conductive PE bag is tested accordant with the relevant test standard and requirements.

Test Item:	Test Method:	Measured Equipment(s):	MDL:
Lead (Pb)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Cadmium (Cd)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Mercury (Hg)	IEC 62321:2008 Ed.1 Sec.7	ICP-OES	2mg/kg
Hexavalent Chromium (Cr(VI))	IEC 62321:2008 Ed.1 Annex C	UV-Vis	2mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg

**Important Notice:** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2013.