

WAGO Kontakttechnik GmbH & Co. KG · Postfach 28 80 · 32385 Minden

WAGO Kontakttechnik GmbH & Co. KG  
Postfach 28 80 · 32385 Minden  
Hansastraße 27 · 32423 Minden  
Telefon 05 71/8 87-0  
Telefax 05 71/8 87-169  
info@wago.com  
www.wago.com  
Ust-IdNr. DE 814428979

Deutsche Bank, Minden  
IBAN DE08 4907 0028 0296 1019 00  
BIC DEUTDE33B490  
Sparkasse Minden-Lübbecke  
IBAN DE67 4905 0101 0080 0001 85  
BIC WELADED1MIN

Ihr Ansprechpartner  
J. Brandhorst

Durchwahl  
-233

Datum  
19.08.15

## Product Change Notification

### PCN 2015-08-2060-2

Dear Customer,

With this letter we inform about the following product changes of our

#### **SMD PCB terminal blocks 2060 series.**

1. Reel packaging
2. Concerned products
3. Changeover schedule


#### **1. Reel packaging**

The packaging of SMD PCB terminal blocks 2060 series will be changed from PE foil bags to LDPE shrink wrapping.

Current Version



New Version

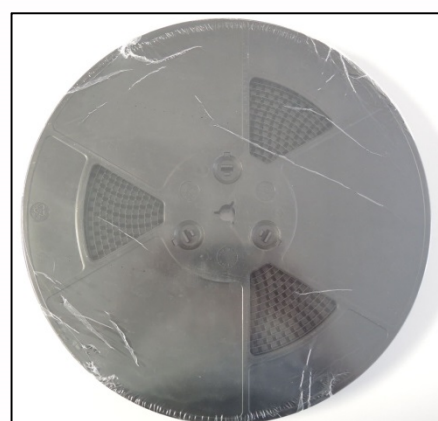

The change will have no negative influence on moisture transition into the packaging.  
MSL-Level of WAGO SMD PCB terminal blocks is 1 ( Unlimited "Floor Life" at 30°C / 85% r.H.).

WAGO SMD PCB terminal blocks are not electrostatic discharge sensitive (ESD) devices.  
Nevertheless the shrink wrapping material is categorized as static dissipative acc. to EN 61340-5-3.

## 2. Concerned products

2060-401/998-404	SMD terminal block, 1-pole, light gray, pin spacing 4 mm
2060-402/998-404	SMD terminal block, 2-pole, light gray, pin spacing 4 mm
2060-403/998-404	SMD terminal block, 3-pole, light gray, pin spacing 4 mm
2060-802/998-404	SMD terminal block, 2-pole, light gray, pin spacing 8 mm
2060-421/998-404	SMD terminal block, 1-pole, black, pin spacing 4 mm
2060-422/998-404	SMD terminal block, 2-pole, black, pin spacing 4 mm
2060-423/998-404	SMD terminal block, 3-pole, black, pin spacing 4 mm
2060-822/998-404	SMD terminal block, 2-pole, black, pin spacing 8 mm
2060-451/998-404	SMD terminal block, 1-pole, white, pin spacing 4 mm
2060-452/998-404	SMD terminal block, 2-pole, white, pin spacing 4 mm
2060-453/998-404	SMD terminal block, 3-pole, white, pin spacing 4 mm
2060-852/998-404	SMD terminal block, 2-pole, white, pin spacing 8 mm
2060-471/998-404	SMD terminal block, 1-pole, black, pin spacing 4 mm
2060-472/998-404	SMD terminal block, 2-pole, black, pin spacing 4 mm
2060-473/998-404	SMD terminal block, 3-pole, black, pin spacing 4 mm
2060-872/998-404	SMD terminal block, 2-pole, black, pin spacing 8 mm

## 3. Changeover schedule

The changeover to the new shrink wrapping packaging will start in week 35/2015. Subsequently the delivery of products will change to the new packaging. During the changeover time a parallel delivery of foil bags and shrink wrapping is possible.



i.V. Karsten Stoll  
Head of Product Management  
Electrical Interconnections



i.A. Jens Brandhorst  
Product Manager  
Electrical Interconnections