FIBOX
Enclosing innovations

UL MNX UL PC 150/100 HT

Sample photo

Order symbol:	UL PC 150/100 HT	**EAN**:	6418074014696
Product nbr:	6411915	**El. number**:	
Description:	UL Enclosure, PC	Finland:	
Remarks:	Smoked transparent cover	Electric No. Denmark:	8212030336
		Electric No. Italy:	7352100U

Including: Base with TPE gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

Dimensions:	**Length**	**Width**	**Height**
mm:	180	130	100
inch:	7.1	5.1	3.9

Materials:	
Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover screws material:	Polyamide
Cover colour:	Smoked grey
Cover screws colour:	Black
Gasket material:	TPE

Temperatures:	
Temperature °C (short term):	-40 … 120 °C
Temperature °C (continuous):	-40 … 80 °C
Temperature °F (short term):	-40 … 250 °F
Temperature °F (continuous):	-40 … 175 °F

Rating:

Ingress Protection (EN 60529): IP66/IP67
Impact Resistance (EN 62262): IK08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
UV resistance: UL 508
Flammability Rating: UL 746C 5"
UL Type:
Glow Wire Test (IEC 695-2-1) °C: 960

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
SGS Fimko
UL Canada
Gost R

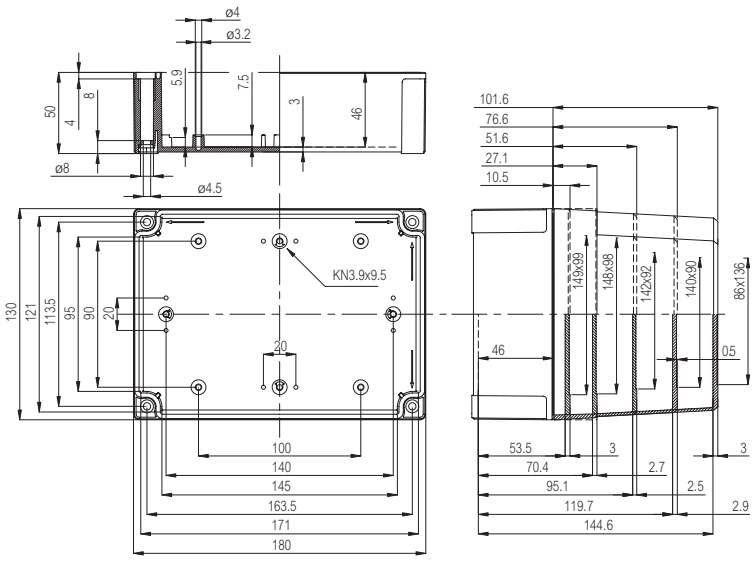

© Fibox Oy, Data subject to change without notice (printed: 12.7.2017)