


www.mcmelectronics.com

| Model Number: | 50-14015 | Sinuscidal 2010-11-9 13 29 56 |
|--|----------|--|
| 8" 2-Way In-Ceiling Speaker System | | 30 0 CLIO 180 0 |
| 8" Woofer With PP Cone & Rubber Surround | | Ohm Deg |
| 1" Voice Coil, 20oz Magnet | | 25.0 |
| 1/2" High Compliance Polymer Tweeter | | |
| HighImpact ABS Plastic Frame | | 20.0 |
| 80 Watts Max | | |
| 6dB/Octave Crossover | | 15.0 |
| Frequency Response: 30Hz ~ 20KHz (-3dB) | | |
| Sensitivity: 90dB (M/W) | | 10.0 |
| Impedance: 8 Ohm | | |
| | | 5.0 |
| | | 10 20 50 100 200 500 1k 2k Hz 5k 10k 20k CH A Ohm Resolution 1/6 Octave Unsmoothed Delay [ms] 0 000 Dist Rise [dB] 30 00 File (DBS8026 L sin) |
| | | 1500 |
| | | dBSPL Deg |
| | | 120 0 |
| | | |
| | | 900 |
| | | |
| | | 60.0 |
| | | |
| | | 30 0 |
| | | |
| | | 0.0 |
| | | 10 20 50 100 200 500 1k 2k Hz 5k 10k 20k CH A dBSPL Resolution 1/6 Octave Unsmoothed Delay [ms] 0 000 Dist Rise (dB) 30 00 File: DBS8026.SPL sin |
| | | File: UDS00/20-SPL SIR |
| | | |

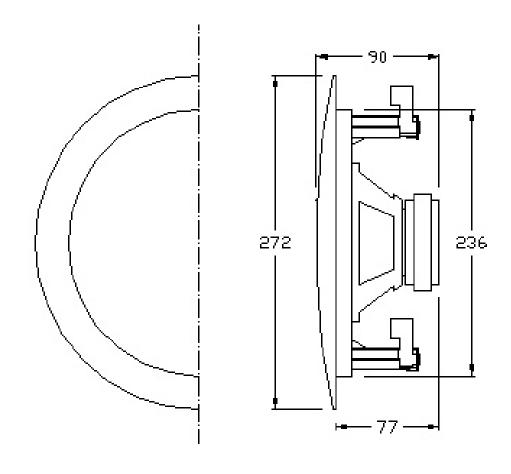

ALL DIMENSIONS ARE IN MILLIMETERS