End Module

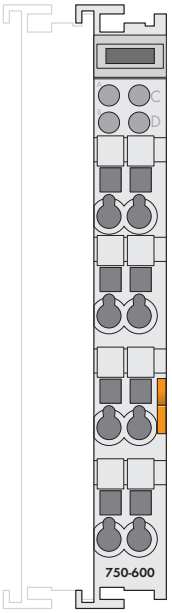

After the fieldbus node is assembled with the correct buscoupler and selected I/O modules, the end module is snapped onto the assembly.

It completes the internal data circuit and ensures correct data flow.

Description	Item No.	Pack. Unit
End Module	**750-600**	1
End Module/T	**750-600/025-000**	1
Extended temperature range: -20 °C ... +60 °C		

Accessories		Item No.	Pack. Unit
Miniature WSB Quick marking system			
	plain	**248-501**	5
	with marking	see Section 11	

Approvals

Conformity marking	CE
Korea Certification	
Marine applications	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA
UL 508	
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4
TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T135°C Dc
IECEx TUN 09.0001 X	Ex d I Mb, Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc

Technical Data

Width	12 mm
Weight	46.4 g
EMC immunity of interference	acc. to EN 61000-6-2, marine applications
EMC emission of interference	acc. to EN 61000-6-4, marine applications