

SER6437A

2-port RS-232
PCI Express Board



Introduction

SUNIX SER6437A, PCI Express serial communication board meets the PCI Express Base Specification Revision 2.0, allows users to add or expand two RS-232 COM ports on PC-based system to use serial devices further. It is compatible with PCI Express x1, x2, x4, x8 and x16 lane Bus allowing it to be installed in any PC-based system. The majorities of today's motherboard is not equipped with serial ports or only have one serial port. With SUNIX PCI Express serial board, users can add one serial port to their system, allowing them to use serial devices further. SUNIX SER6437A card has 128-bytes onboard FIFO buffer and compatible with 16C950 UART specifications. It is designed with SUNIX UART controller, SUN2212 and as well built with many of SUNIX advanced features and technologies, making it the best solution for commercial and industrial automation applications.

Features

- Expands two independent RS-232 serial ports with communication speeds up to 115.2Kbps.
- With high reliable SUNIX SUN2212 native PCI Express 16C950 UART controller.
- Designed to meet PCI Express Base Specification Revision 2.0.
- Supports x1, x2, x4, x8, x16 (lane) PCI Express Bus connector keys.
- On-chip hardware auto flow control to guarantee no data loss.
- Built-in ± 15 KV ESD protection for all serial signals meets IEC1000-4-2 standard.
- Plug-n-Play, I/O address and IRQ assigned by BIOS.
- Certified by CE, FCC, RoHS, and Microsoft WHQL approval.
- Support Microsoft Windows, Linux, and DOS.

Specifications

General

Interface	RS-232
Controller	SUNIX SUN2212 (16C950 UART Compatible)
BUS	PCI Express Spec 2.0, Single-Lane (x1)
IRQ & IO	Assigned by System

Serial Communication

Interface	RS-232
No. of Port	2-port
FIFO	128byte Hardware
Signal	DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
Baud rate	50bps ~ 115.2Kbps
Stop bit	1, 1.5, 2
Parity	even, odd, none, mark, space
Flow Control	None, Xon/Xoff, RTS/CTS
Protection	±15KV ESD protection for each signal Human Body Model (HBM) ±15KV IEC1000-4-2 Air Gap Discharge ±8KV IEC1000-4-2 Contact Discharge
PCB Connector	DB9 Male

Driver Support

Microsoft Client	XP / Vista / 7 / 8 (X86/X64)
Microsoft Server	2000 / 2003 / 2008 / 2008R2 (X86/X64)
Microsoft Embedded	Windows CE4.2/5.0/6.0 XP Embedded / POS Ready 2009 / Embedded System
Linux	Linux 2.4.x / 2.6.x /3.x
DOS	DOS
FreeBSD	FreeBSD 5.3~5.5 / 6.0~6.4
QNX	QNX 6.3.2/6.4.0

Regulatory Approvals

Hardware	CE EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, VCCI Class B FCC Part 15 Class B, BSMI: CNS13438, C-Tick: CISPR22 AS/NZS, RoHS
Software	Microsoft WHQL Windows Microsoft Client: XP / Vista / 7 / 8 (X86/X64) Microsoft Server: 2000 / 2003 / 2008 (X86/X64)


Environment

Operation Temperature	0 to 60°C (32 to 140°F)
Operation Humidity	5 to 95% RH
Storage Temperature	-20 to 85°C (-4 to 185°F)

Dimension


PCB Dimension	65 x 88 mm
Bracket	Standard 121 mm
Bracket Space	1

Mechanical Drawings (Unit = mm)

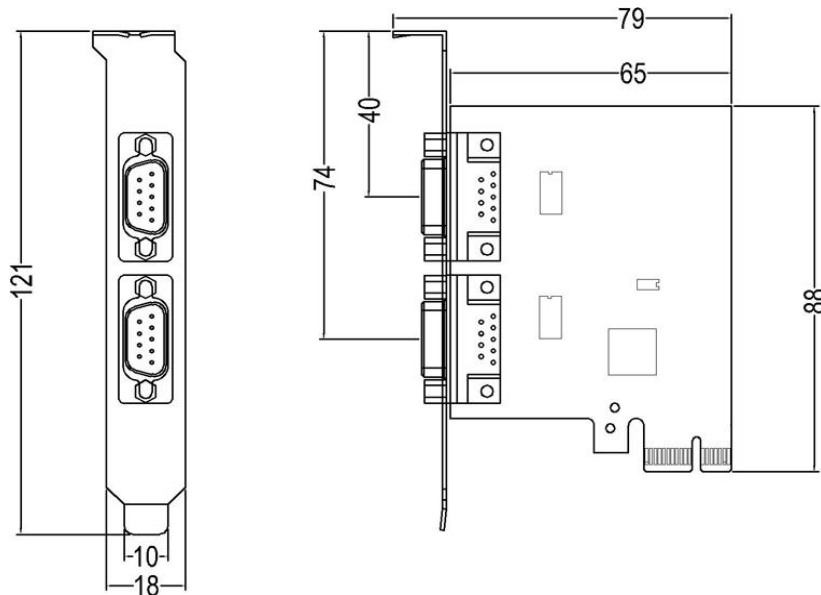


Pin Assignment

Serial



PIN	DB9M
DCD	1
RxD	2
TxD	3
DTR	4
GND	5
DSR	6
RTS	7
CTS	8
RI	9

Application

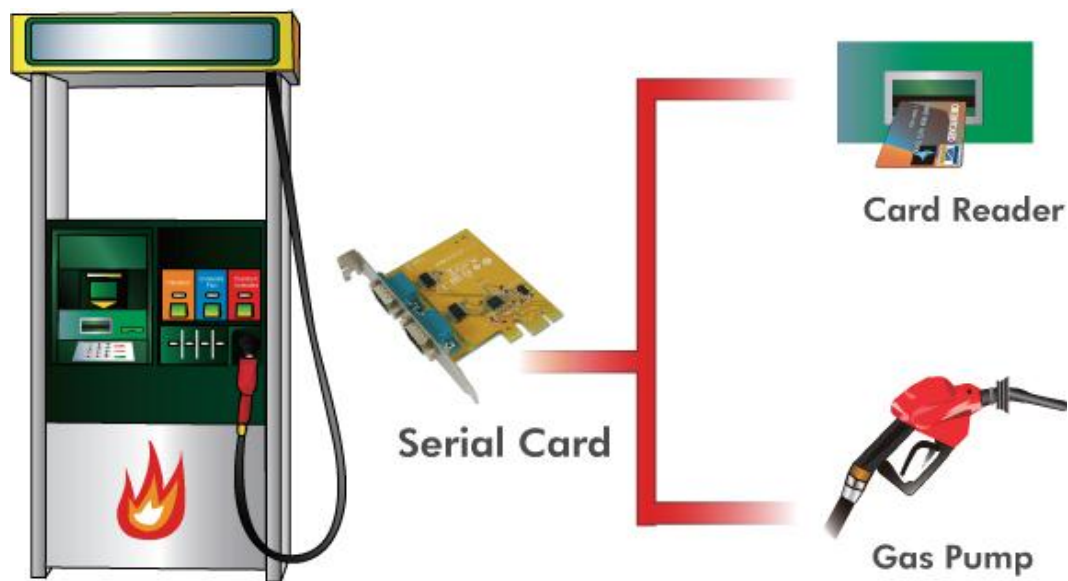

Package

- SER6437A – 2-port RS-232 PCI Express Board.
- Quick Installation Guide.
- Software CD Driver



Optional Accessories

- PCIe Add-on Card Holder
Part No.: 13BF-PCIEFIX010000





Order Information

Bus	Port	Connecter	Baud Rate	ESD Protection	Power output	Bracket	Model NO.
PCI Express	16	Mini SCSI 68 Female	921.6Kbps	±15KV	-	Standard	SER5416H
			115.2Kbps				SER5466A
	921.6Kbps	SER5466H					
	115.2Kbps	SER5466AL					
	8	DB62 Female	921.6Kbps			SER5466HL	
			115.2Kbps			SER6456A	
		Mini SCSI 68 Female	921.6Kbps			SER6456H	
			115.2Kbps			SER6456P	
	4	DB44 Female	921.6Kbps			SER6456S	
			115.2Kbps			SER6456PH	
			921.6Kbps			SER6456SH	
			115.2Kbps			SER6456AL	
			921.6Kbps		SER6456HL		
			115.2Kbps		SER6456PL		
			921.6Kbps		SER6456SL		
			921.6Kbps		SER6456PHL		
			921.6Kbps		SER6456SHL		
			115.2Kbps		SER6437A		
			921.6Kbps		SER6437H		
			2		DB9 Male	115.2Kbps	SER6437P
	921.6Kbps	SER6437S					
	921.6Kbps	SER6437PH					
	921.6Kbps	SER6437SH					
	DB44 Female	115.2Kbps			SER6437AL		
		921.6Kbps			SER6437HL		
		115.2Kbps			SER6437PL		
		115.2Kbps			SER6437SL		
	1	DB9 Male	921.6Kbps		SER6437PHL		
			115.2Kbps		SER6437SHL		
			115.2Kbps		SER6427A		
			921.6Kbps		SER6427H		
			115.2Kbps		SER6427P		
921.6Kbps			SER6427S				
921.6Kbps			SER6427PH				
115.2Kbps			SER6427SH				
921.6Kbps			SER6427AL				
921.6Kbps			SER6427HL				
115.2Kbps			SER6427PL				
921.6Kbps			SER6427SL				
			SER6427PHL				
			SER6427SHL				

Headquarters

Taiwan

Sunix Co., Ltd.
 Tel : +886-2-8913-1987
 Fax : +886-2-8913-1986
 Website : www.sunix.com.tw
 E-mail : info@sunix.com.tw

China

Shanghai Office
 Tel : +86-21-6469-1670
 Fax : +86-21-6468-8346
 Website : www.sunix.com.cn
 E-mail : info@sunix.com.cn

Beijing Office
 Tel : +86-010-65308421
 Fax : +86-010-62653864

Shenzhen Office
 Tel : +86-755-33500418

Germany

Sunix Vertriebs GmbH
 Tel : +49(0)6146-60 1345
 Fax : +49(0)6146-60 1346
 Website : www.sunix-europe.com
 E-mail : info@sunix-gmbh.de

Factory

Kunshan Factory
 Tel : +86-512-5745-6488
 Fax : +86-512-5745-6193
 Website : www.sunix.com.cn

www.sunix.com.tw

© Copyright by SUNIX Group all right reserved.