

The **Dual Band Mini Stick Infrared Receiver** receives IR signal from a handheld IR remote control and relays this signal to the audio/video equipment for operation from another room.


FEATURES

1. CFL friendly – allows installations in areas with compact fluorescent lighting. Works in most lighting environments.
2. Blue IR confirmation LED.
3. Wide band IR receives IR from many types of remotes.
4. Self-adhesive tape for quick and easy fixing on any flat surface.
5. 3 meters cable with 3.5mm stereo mini-plug.

SPECIFICATIONS

| | |
|------------------------------|----------------------------|
| Receive frequency range..... | 34 KHz to 60 KHz |
| Transmit frequencies..... | 38 KHz & 56 KHz |
| Range..... | 40ft. @ 38 KHz |
| | 25ft. @ 56 KHz |
| Power..... | 12VDC, 30mA max. |
| Dimensions..... | 45L x 14W x 13H mm |
| Cord length..... | 10ft (3m) |
| Connector type..... | 1/8" (3.5mm) TRS mini plug |
| Weight..... | 28 g |

WIRE CONNECTIONS

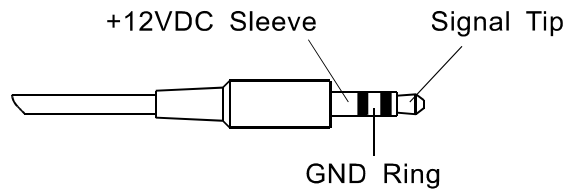

Conductors on 1/8" (3.5mm) stereo mini-plug

INSTALLATION

The IR Receiver is used in the typical installations: Connected directly to an IR connector block or IR hub. Make sure mounting surface must be clean and dry for fixed well.

The **Dual Band Mini Stick Infrared Receiver** receives IR signal from a handheld IR remote control and relays this signal to the audio/video equipment for operation from another room.


FEATURES

1. CFL friendly – allows installations in areas with compact fluorescent lighting. Works in most lighting environments.
2. Blue IR confirmation LED.
3. Wide band IR receives IR from many types of remotes.
4. Self-adhesive tape for quick and easy fixing on any flat surface.
5. 3 meters cable with 3.5mm stereo mini-plug.

SPECIFICATIONS

| | |
|------------------------------|----------------------------|
| Receive frequency range..... | 34 KHz to 60 KHz |
| Transmit frequencies..... | 38 KHz & 56 KHz |
| Range..... | 40ft. @ 38 KHz |
| | 25ft. @ 56 KHz |
| Power..... | 12VDC, 30mA max. |
| Dimensions..... | 45L x 14W x 13H mm |
| Cord length..... | 10ft (3m) |
| Connector type..... | 1/8" (3.5mm) TRS mini plug |
| Weight..... | 28 g |

WIRE CONNECTIONS

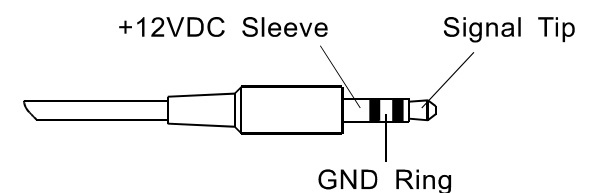

Conductors on 1/8" (3.5mm) stereo mini-plug

INSTALLATION

The IR Receiver is used in the typical installations: Connected directly to an IR connector block or IR hub. Make sure mounting surface must be clean and dry for fixed well.