



NATIONAL
Electronics, Inc.

—PRODUCT INFORMATION—

Page 1 12-70

12AU7-A

Twin Triode

The 12AU7-A is a miniature medium-mu twin triode intended for service in radio and television receivers or in audio amplifiers. The tube is suitable for use in a variety of stages, such as general-purpose amplifier, phase inverter, oscillator, or multivibrator.

The electrical characteristics of the 12AU7-A and 12AU7 are essentially equivalent. As compared to the 12AU7, the 12AU7-A exhibits a lower microphonic output.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

	Series	Parallel	
Heater Voltage, AC or DC	12.6 ± 1.3	6.3 ± 0.6	Volts
Heater Current	0.15	0.3	Amperes
Direct Interelectrode Capacitances			
Grid to Plate: (g to p), Each Section	1.5		pf
Input: g to (h + k), Each Section	1.6		pf
Output: p to (h + k), Section 1	0.5		pf
Output: p to (h + k), Section 2	0.35		pf

MECHANICAL

Operating Position - Any

Envelope - T-6½, Glass

Base - E9-1, Small Button 9-Pin

Outline Drawing - EIA 6-2

Maximum Diameter 0.875 Inches

Maximum Over-all Length 2.187 Inches

Maximum Seated Height 1.937 Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.


PHYSICAL DIMENSIONS

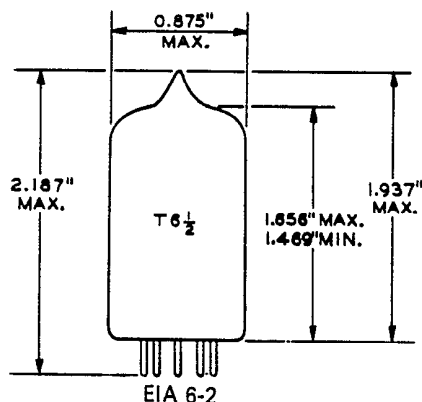

TERMINAL CONNECTIONS

- Pin 1 - Plate (Section 2)
- Pin 2 - Grid (Section 2)
- Pin 3 - Cathode (Section 2)
- Pin 4 - Heater
- Pin 5 - Heater
- Pin 6 - Plate (Section 1)
- Pin 7 - Grid (Section 1)
- Pin 8 - Cathode (Section 1)
- Pin 9 - Heater Center-Tap

BASING DIAGRAM



EIA 9A

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.


NATIONAL Electronics, Inc.

40W267 Keslinger Road LaFox, Illinois 60147


12AU7-A

Page 4
12-70

AVERAGE TRANSFER CHARACTERISTICS

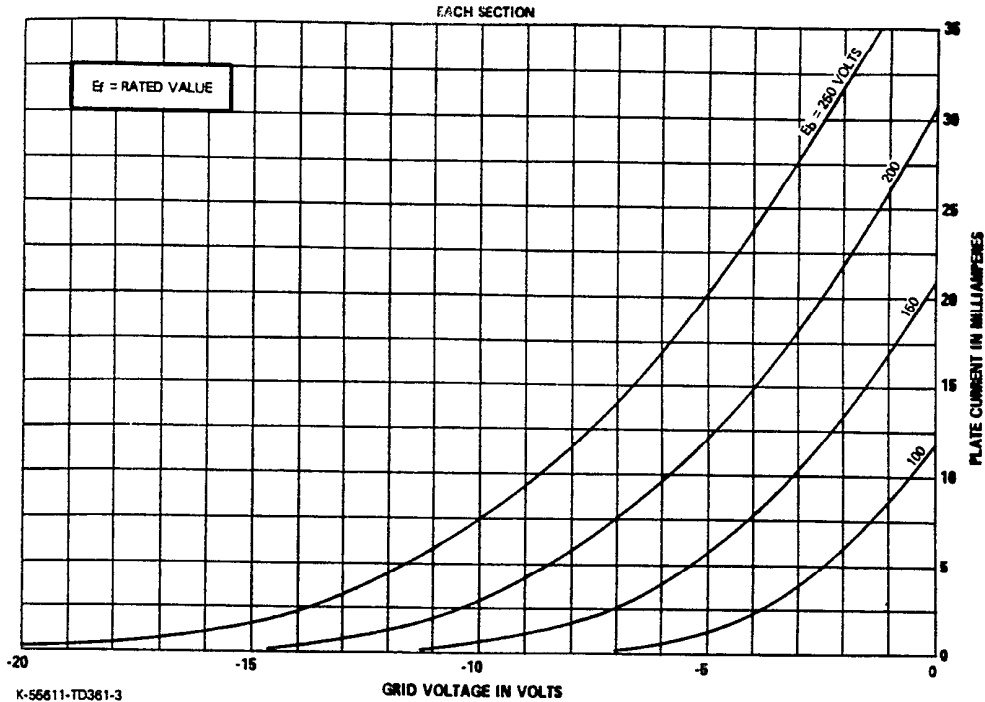


AVERAGE CHARACTERISTICS

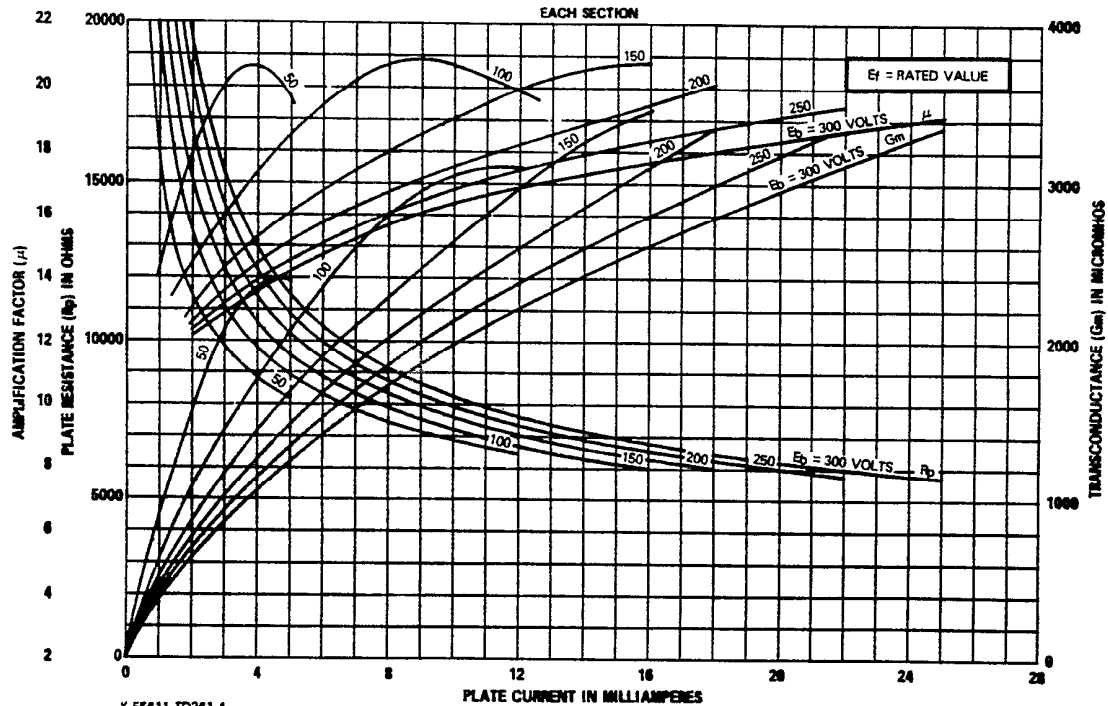


NATIONAL Electronics, Inc.

40W267 Keelinger Road LaFox, Illinois 60147

AVERAGE PLATE CHARACTERISTICS

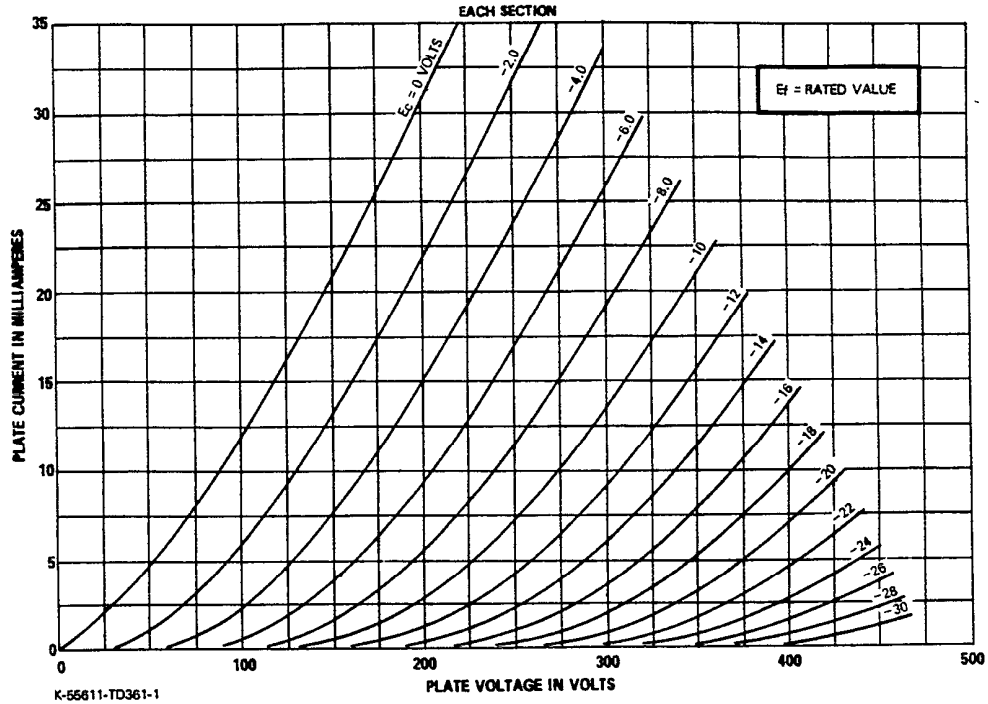

AVERAGE PLATE CHARACTERISTICS

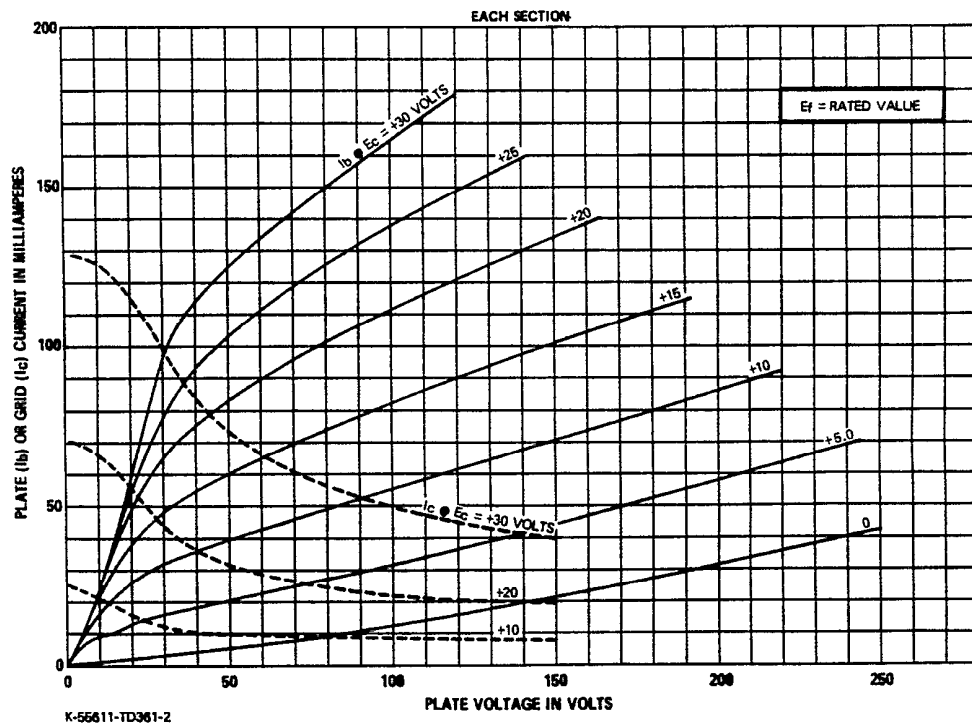

12AU7-A

Page 2
12-70

MAXIMUM RATINGS (Cont'd)

DESIGN-MAXIMUM VALUES UNLESS OTHERWISE INDICATED, EACH SECTION

	Class A ₁ Amplifier	Vertical Deflection Amplifier*	Vertical Oscillator Service*	Horizontal Oscillator Service*
DC Plate Voltage.....	330	330	330	330 Volts
Peak Positive Pulse Plate Voltage.....	---	1200♦	---	---
Peak Negative Grid Voltage.....	---	275	440	660 Volts
Plate Dissipation				
Each Plate.....	2.75	2.75▲	2.75	2.75 Watts
Both Plates.....	5.5	5.5▲	5.5	5.5 Watts
DC Cathode Current.....	22	22	22	22 Milliamperes
Peak Cathode Current.....	---	66	66	330 Milliamperes
Heater-Cathode Voltage				
Heater Positive with respect to Cathode				
DC Component.....	100	100	100	100 Volts
Total DC and Peak.....	200	200	200	200 Volts
Heater Negative with respect to Cathode				
Total DC and Peak.....	200	200	200	200 Volts
Grid Circuit Resistance				
With Fixed Bias.....	0.25	---	2.2	2.2 Megohms
With Cathode Bias.....	1.0	2.2	2.2	2.2 Megohms

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER, EACH SECTION

Plate Voltage.....	100	250 Volts
Grid Voltage.....	0	-8.5 Volts
Amplification Factor.....	20	17
Plate Resistance, approximate.....	6500	7700 Ohms
Transconductance.....	3100	2200 Micromhos
Plate Current.....	11.8	10.5 Milliamperes
Grid Voltage, approximate		
I _b = 10 Microamperes.....	---	-24 Volts

NOTES

- * The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.
- Heater current of a bogey tube at bogey heater voltage.
- Without external shield.
- ⊙ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Com-

munications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.


- ♦ Value given is to be considered as an Absolute-Maximum Rating. In this case, the combined effect of supply voltage variation, manufacturing variation including components in the equipment, and adjustment of equipment controls should not cause the rated value to be exceeded.

- ▲ In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.

CLASS A RESISTANCE-COUPLED AMPLIFIER

EACH SECTION

R _p Meg.	R _s Meg.	R _{g1} Meg.	E _{bb} = 90 Volts			E _{bb} = 180 Volts			E _{bb} = 300 Volts		
			R _k	Gain	E _o	R _k	Gain	E _o	R _k	Gain	E _o
0.10	0.10	0.10	3900	10	10	3600	11	20	3500	11	30
0.10	0.24	0.10	5000	11	14	4700	12	27	4400	12	41
0.24	0.24	0.10	9400	11	13	8700	11	25	8700	12	38
0.24	0.51	0.10	11000	11	17	11000	12	32	11000	12	48
0.51	0.51	0.10	19000	11	15	18000	12	29	18000	12	43
0.51	1.00	0.10	24000	11	19	23000	12	37	23000	12	54
0.24	0.24	10	0	14	12	0	16	20	0	17	28
0.24	0.51	10	0	14	16	0	16	28	0	17	40
0.51	0.51	10	0	14	15	0	15	26	0	16	38
0.51	1.00	10	0	14	19	0	16	35	0	16	52

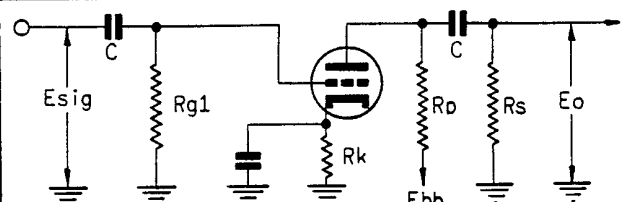

Note: Coupling capacitors (C) should be selected to give desired frequency response. R_k should be adequately by-passed.

Notes: 1. E_o is maximum RMS voltage output for five percent (5%) total harmonic distortion. 2. Gain measured at 2.0 volts RMS output. 3. For zero-bias data, generator impedance is negligible.