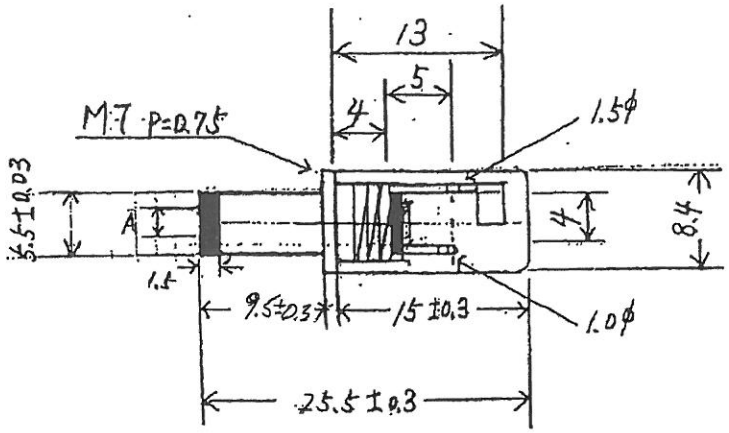

A		寸法
2.5φ		2.5±0.05

PART		MATERIAL
HANDLE	1	ABS
BODY	1	BSBM
5.5mm INSULATOR	1	EBONITE
LUG	2	BST
INSULATOR	1	EBONITE
CONTACT CENTER PIN	1	BSBM

OPERATING TEMPERATURE : -25～+70℃ HUMIDITY : Max 85%
NOMINAL RATINGS : VOLTAGE : 3.15～13.5VDC CURRENT : 2A
INSULATION RESISTANCE : Min 50MΩ at 500V (First Current Flow)
VOLTAGE BREAKDOWN : 1 Minute at Max 500VAC
CONTACT RESISTANCE : Max 30mΩ at 10mV/1A (First Current Flow)

(Subject to EIAJ RC-5320 Standards)

1999.8.25 Tolerance +/-0.03 is changed to +/-0.05.
Other tolerance : 0.3

UNIT	SCALE	2.5 x 5.5 x 9.5
MM	2:1	
ITEM #		27-5902

DATE: 1-05-2017