

324-6516

TOSHIBA


TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TOSHIBA LED LAMP

**TL SU1008 (T04), T LOU1008 (T04), T LAU1008 (T04)
T LYU1008 (T04), T LGU1008 (T04), T L PGU1008 (T04)**

PANEL CIRCUIT INDICATOR

- Surface Mount Device
TL□U1008 (T04) Series
- 1.6 (L) × 0.8 (W) × 0.6 (H) mm Size
Small Package : High Density Mounting is Available
- InGaAsP LED
- It can be manufactured high-luminosity of equipment or reduce of electric power consumption by change in the high-luminosity LED from general-luminosity one.
- Colors : Red, Orange, Amber, Yellow, Green, Pure Green
- Since the products are only 0.6 mm thick, they are suitable for use in thin equipment.
- Milky diffused resin.
Good light diffusion-ideal for backlighting.
- Can be mounted using surface mounter.
- Reflow Soldering is possible.
- Standard Embossed Taping
4 mm Pitch : T04 (4000 pcs/Reel)
- Applications : Telephone Cordless/Cellular Portable Equipment, Backlight, etc.

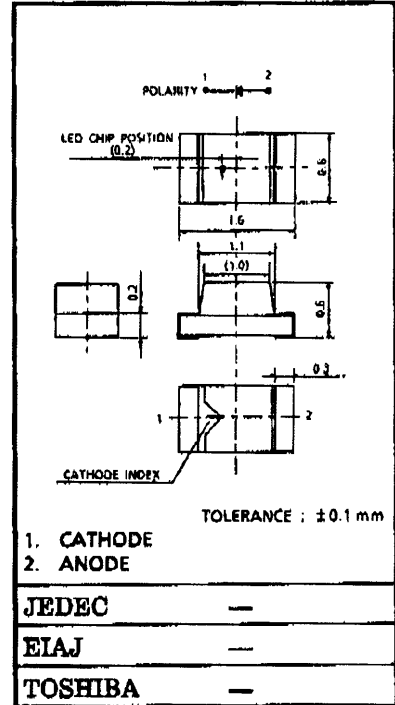

Weight : 1.3 mg

LINE-UP

PRODUCT NAME	COLOR	MATERIAL
TL SU1008	Red	InGaAsP
T LOU1008	Orange	InGaAsP
T LAU1008	Amber	InGaAsP
T LYU1008	Yellow	InGaAsP
T LGU1008	Green	InGaAsP
T L PGU1008	Pure Green	InGaAsP

961001EAG1

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

● Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

● The information contained herein is subject to change without notice.

TOSHIBA**TL(SU,OU,AU,YU,GU,PGU)1008(T04)**

MAXIMUM RATINGS (Ta = 25°C)

PRODUCT NAME	FORWARD CURRENT I _F (mA)	REVERSE VOLTAGE V _R (V)	POWER DISSIPATION P _D (mW)	OPERATING TEMPERATURE T _{opr} (°C)	STORAGE TEMPERATURE T _{stg} (°C)
TLSU1008	25	4	60	-25~80	-30~85
TLOU1008	25	4	60		
TLAU1008	25	4	62.5		
TLYU1008	25	4	62.5		
TLGU1008	25	4	70		
TLPGU1008	25	4	70		

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PRODUCT NAME	FORWARD VOLTAGE V _F				REVERSE CURRENT I _R	
	MIN	TYP.	MAX	I _F	MAX	V _R
TLSU1008	—	2.0	2.4	20	50	4
TLOU1008	—	2.0	2.4	20	50	4
TLAU1008	—	2.1	2.5	20	50	4
TLYU1008	—	2.1	2.5	20	50	4
TLGU1008	—	2.4	2.8	20	50	4
TLPGU1008	—	2.3	2.8	20	50	4
Unit	V			mA	μA	V

OPTICAL CHARACTERISTICS (Ta = 25°C)






PRODUCT NAME	LUMINOUS INTENSITY I _v				EMISSION SPECTRUM							
	MIN	TYP.	MAX	I _F	Peak Emission Wavelength λ _p			Δλ	Dominant Wavelength λ _d			I _F
					MIN	TYP.	MAX		TYP.	MIN	TYP.	
TLSU1008	15.3	55	—	20	—	636	—	17	—	623	—	20
TLOU1008	27.2	78	—	20	—	612	—	15	—	605	—	20
TLAU1008	8.5	24	—	20	—	596	—	13	—	592	—	20
TLYU1008	8.5	24	—	20	—	590	—	13	—	587	—	20
TLGU1008	8.5	29	—	20	—	574	—	11	—	571	—	20
TLPGU1008	1.53	6	—	20	—	562	—	11	—	558	—	20
Unit	mcd			mA	nm			nm	nm			mA

(Note) : This visible LED lamp also emits some IR light.
If a photodetector is located near the LED lamp, please ensure that it will not be affected by this IR light.



TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TLSU1008-1

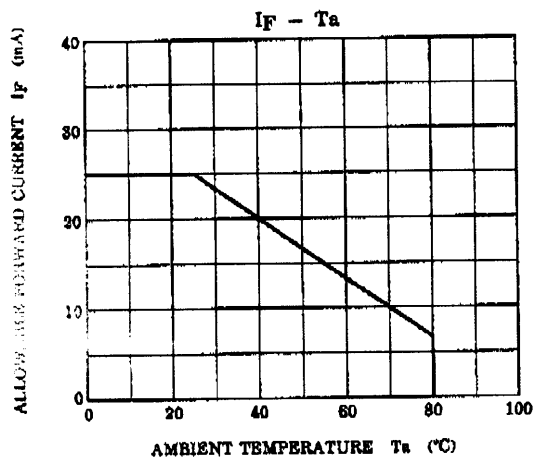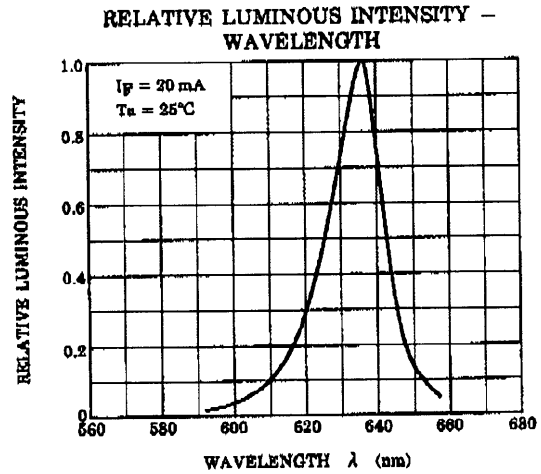
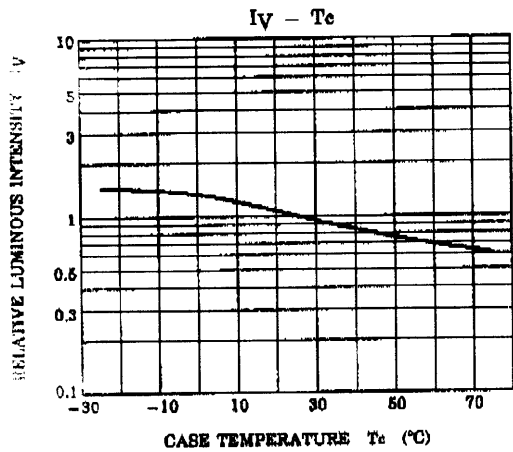
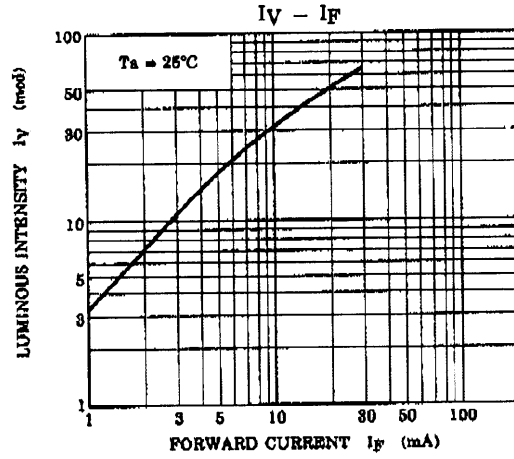
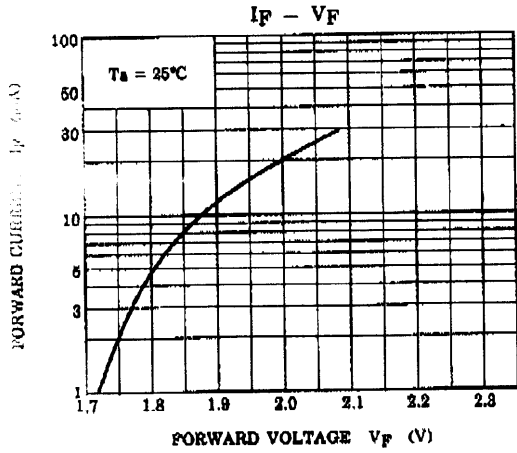


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TL SU1008-2
[RADIATION PATTERN]






Ta = 25°C

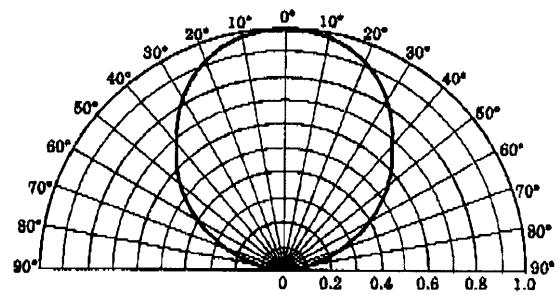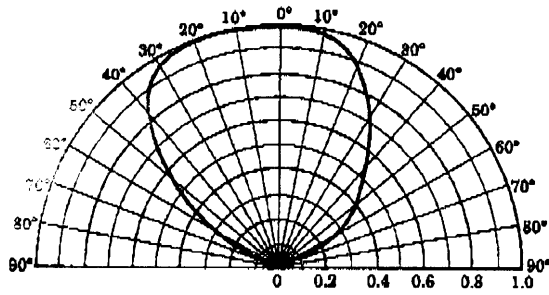

TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TL001008-1

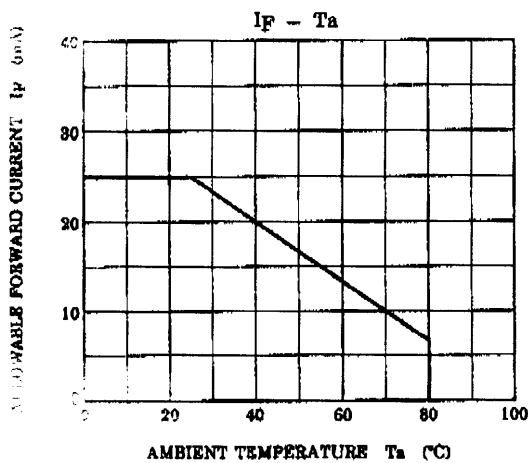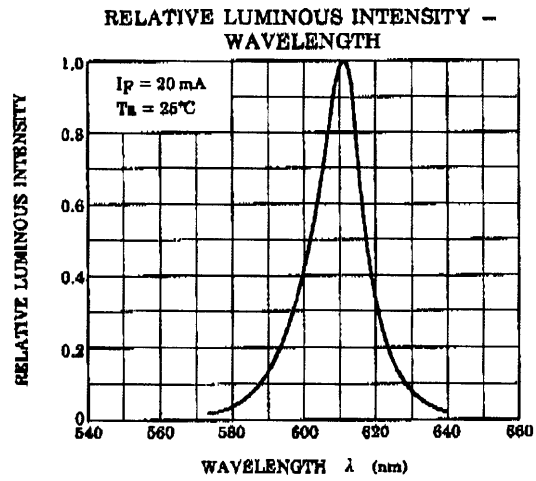
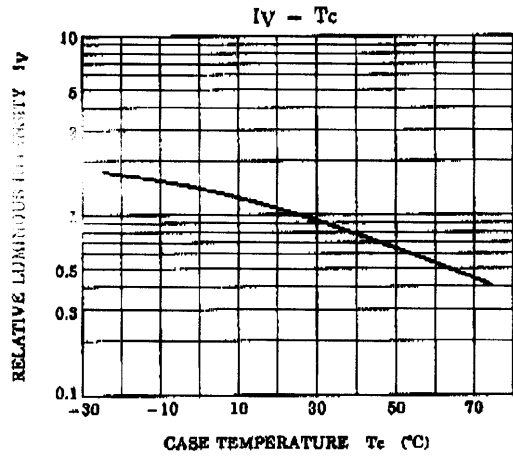
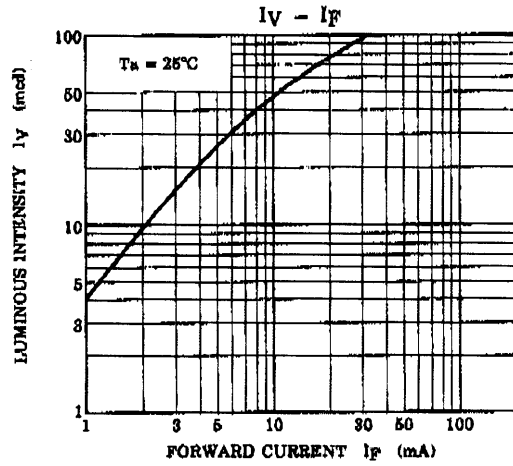
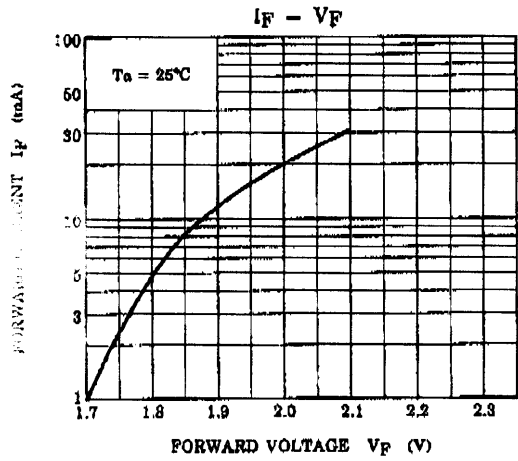


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TL0U1008-2
[RADIATION PATTERN]






T_a = 25°C

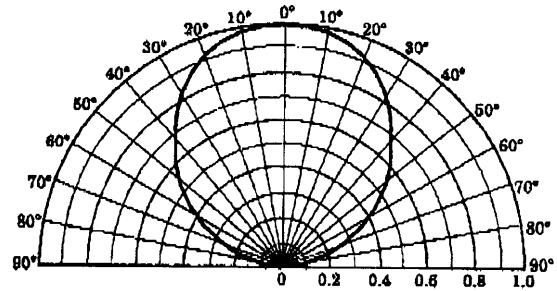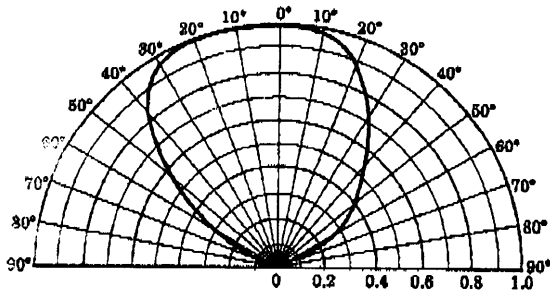

TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TLAU1008-1

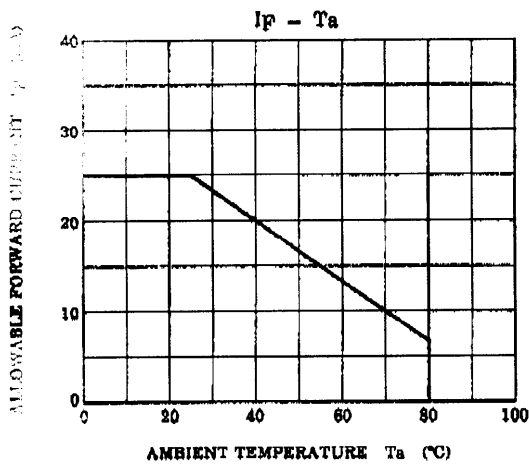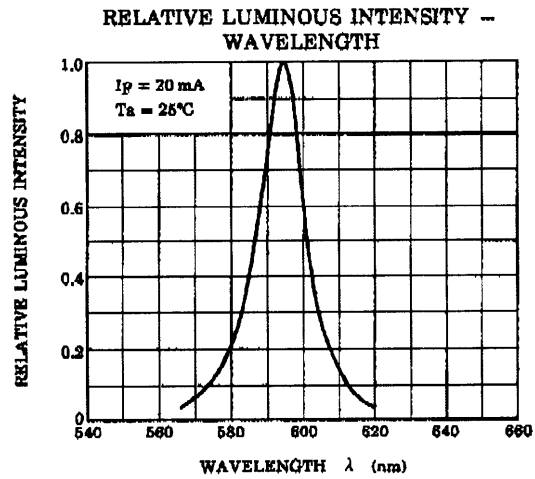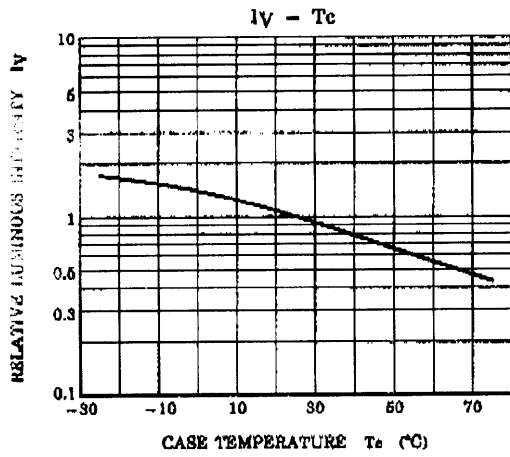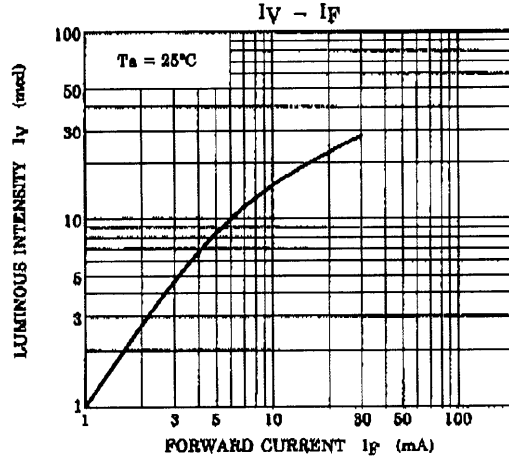
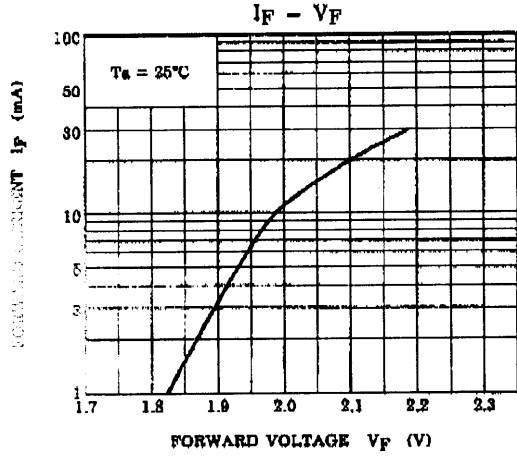


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TLAU1008-2
[RADIATION PATTERN]






Ta = 25°C

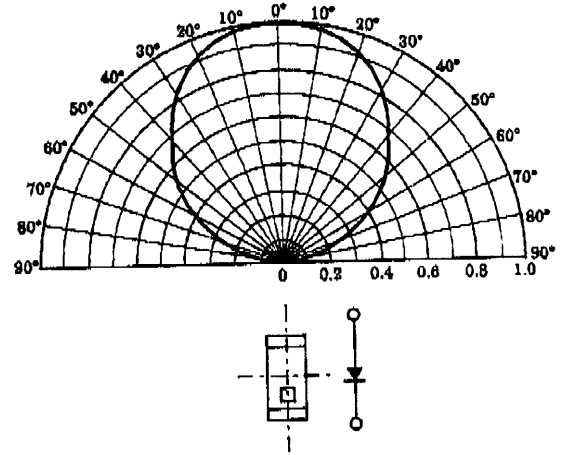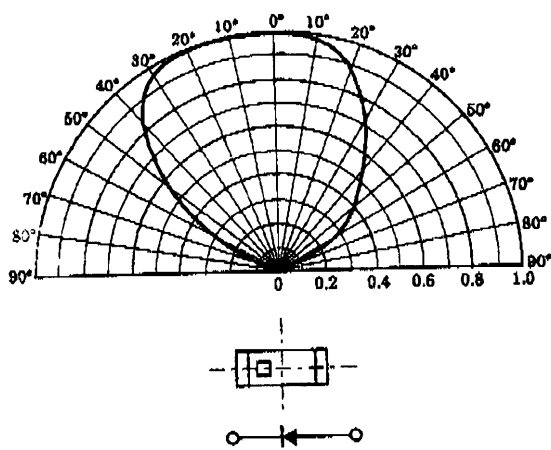

TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TL(SU,OU,AU,YU,GU,PGU)1008-1

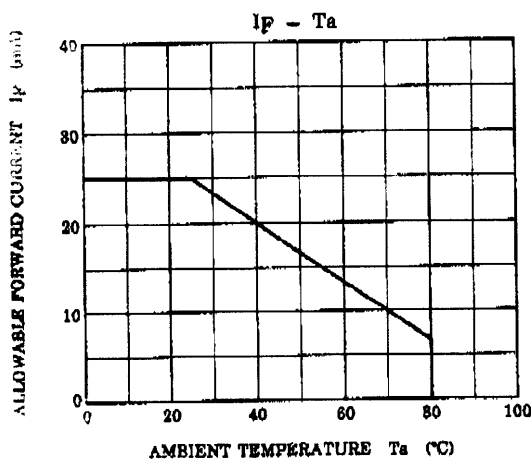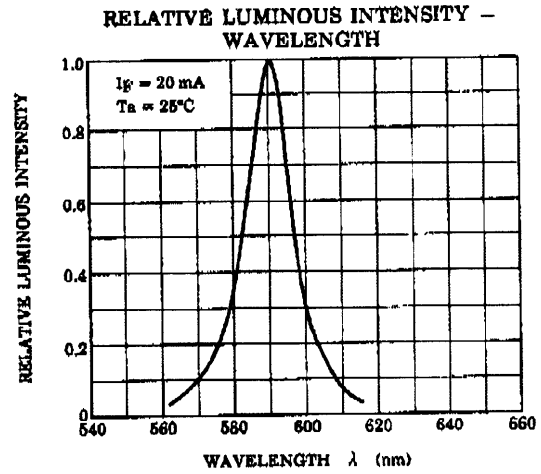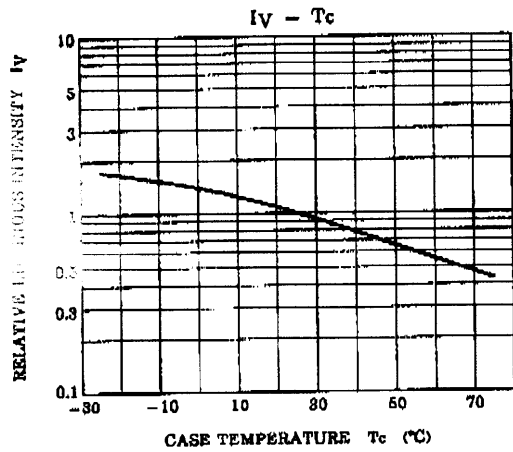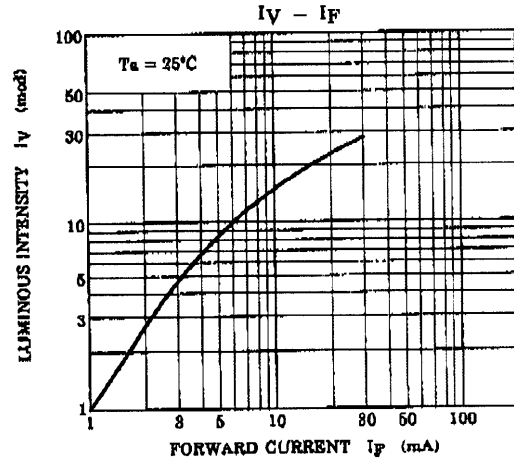
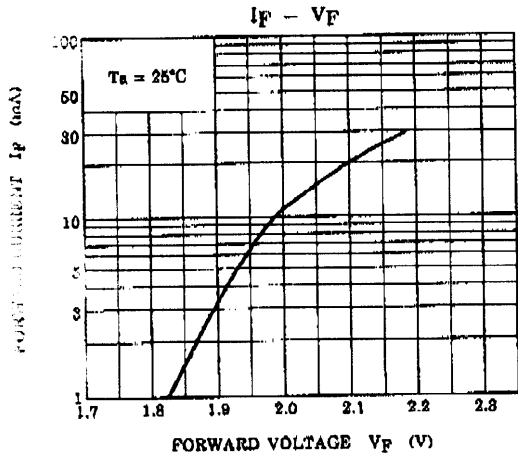


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TYU1008-2
[RADIATION PATTERN]






Ta = 25°C

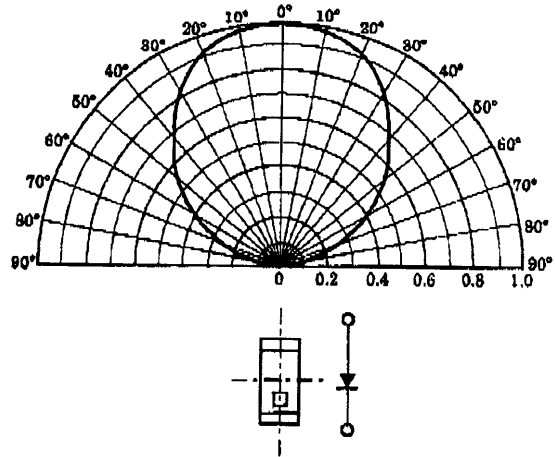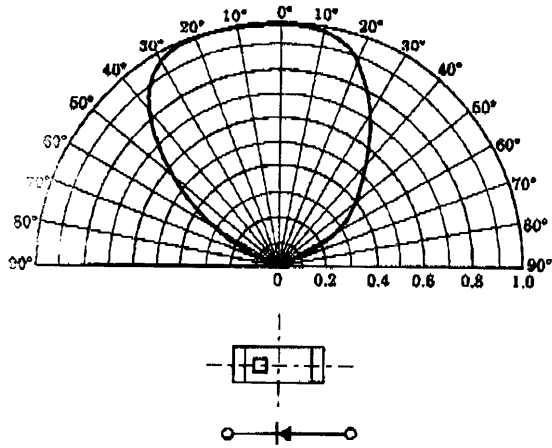

TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

FIGU1008-1

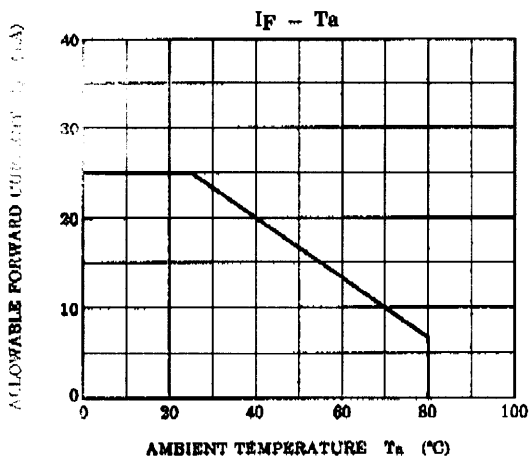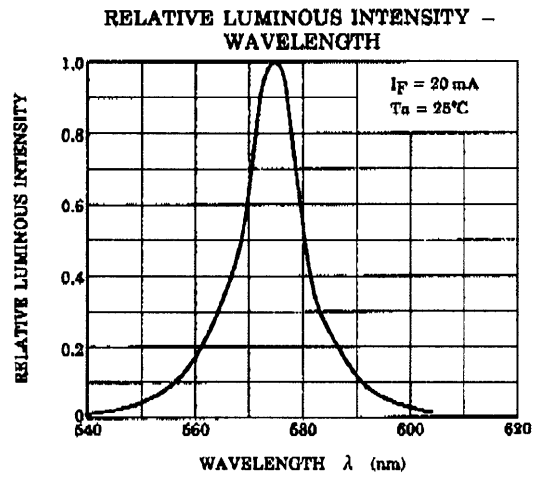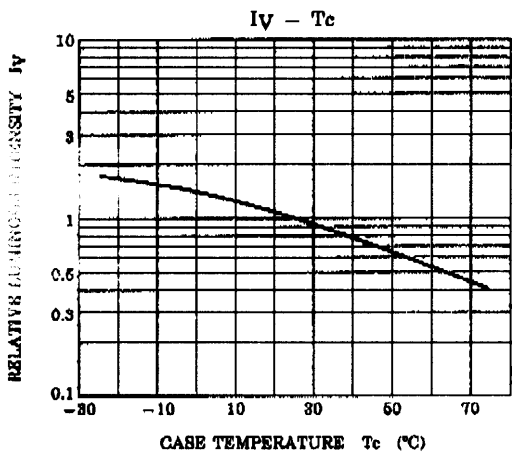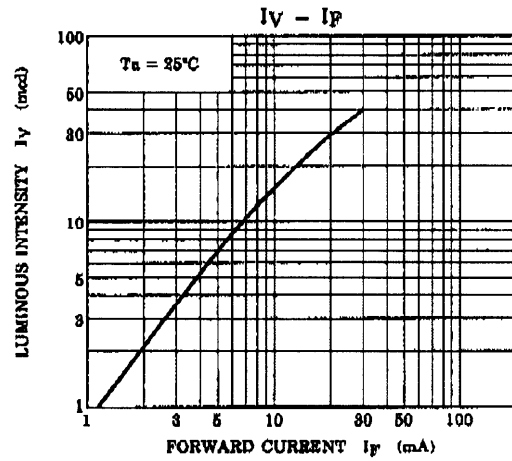
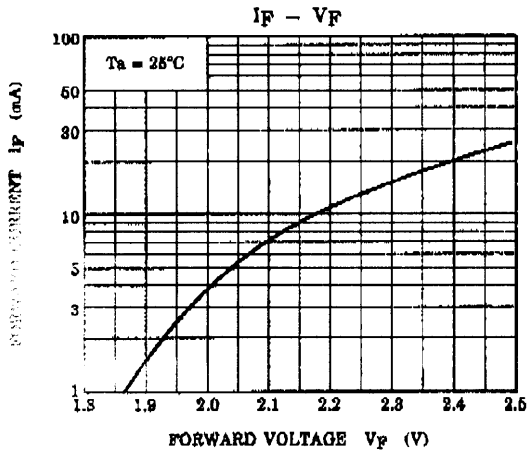


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TL00U1008-2
[RADIATION PATTERN]






Ta = 25°C

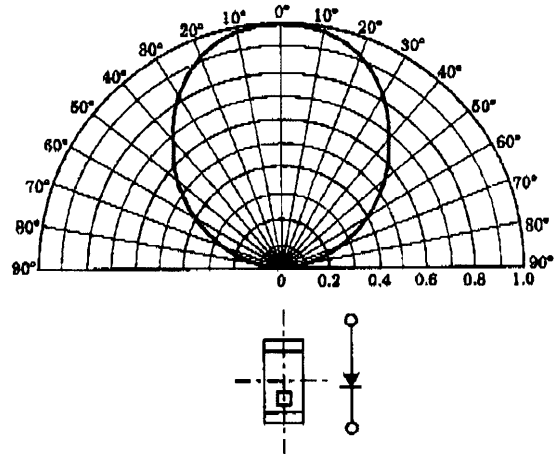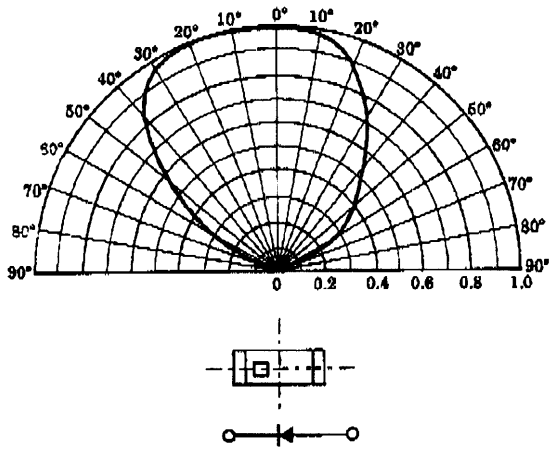

TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TLPGU1008-1

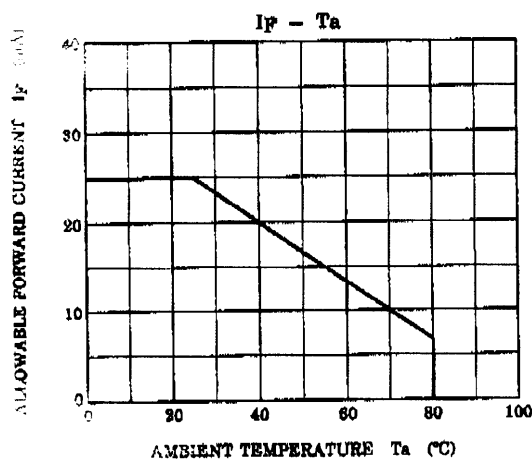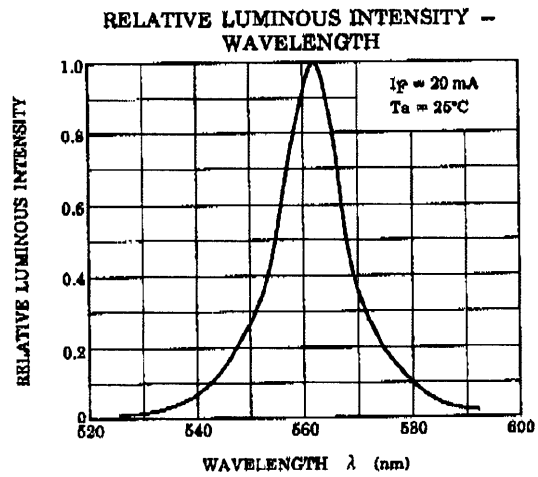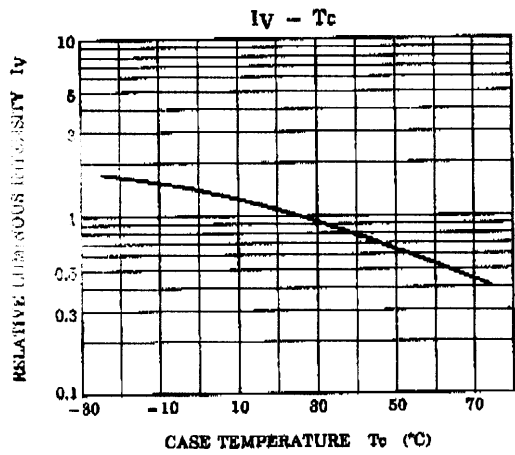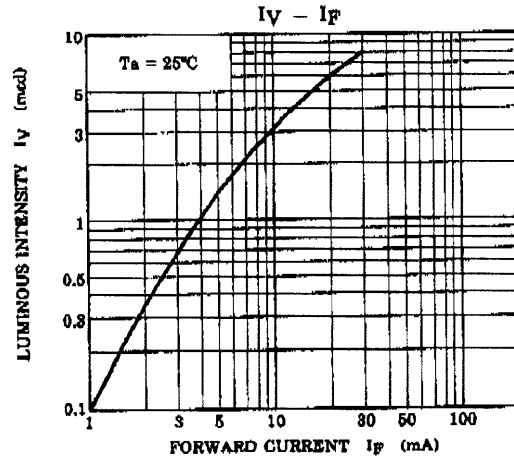
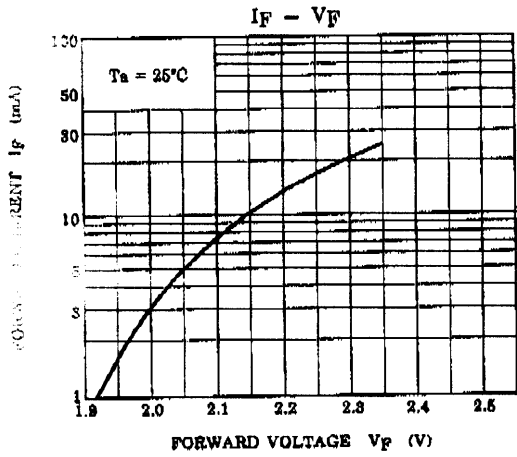


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

TLPGU1008-2
[RADIATION PATTERN]

Ta = 25°C

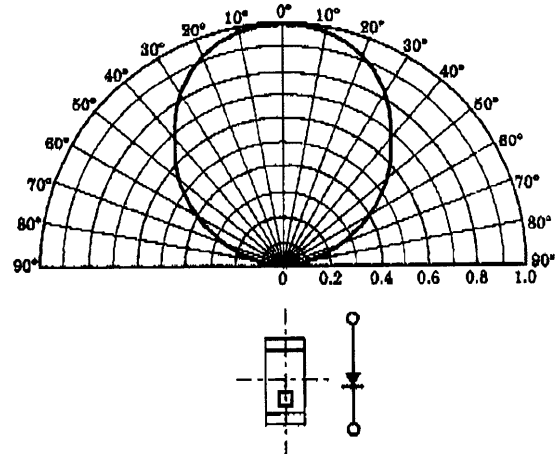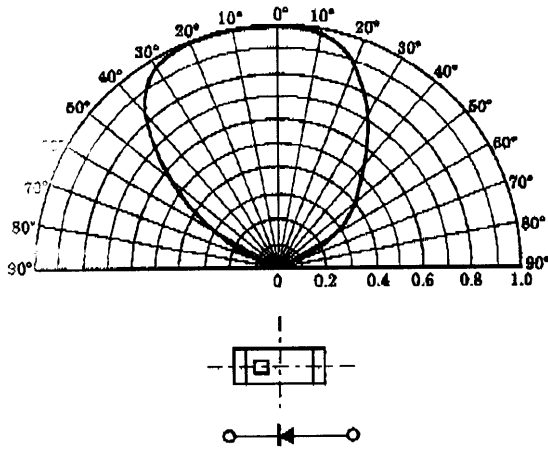

TOSHIBA**TL(SU,OU,AU,YU,GU,PGU)1008(T04)****PACKAGING**

This LED device are packed in an aluminum envelope with silica-gel to avoid moisture absorption. The optical characteristics may be affected by exposure to moisture in the air prior to soldering and it should be stored under the following conditions.

Temperature : 5~30°C
Relative Humidity : 60% or lower

Baking is required if the device have been stored unopened for more than 6 months or if the aluminum envelope has been opened for more than 168 h.

Recommended baking condition is 60°C for 12 h minimum in the dry atmosphere.


PRECAUTION FOR MOUNTING

Do not apply force to the plastic part of the LED in high temperature conditions.
Do not apply friction using a hard materials for avoid injuring the plastic part of the LED.
Keep the LED away from any other parts when assembling boards into the set.

SOLDERING

● Reflow soldering

Temperature profile

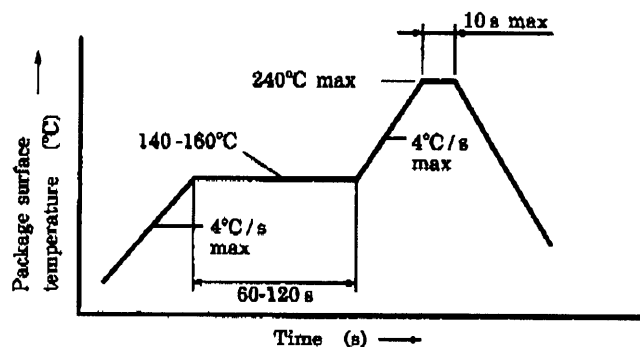

● Second time reflow soldering


In case of second reflow soldering, it should be performed within 168 h after first reflow under the above conditions.

Storage conditions before second reflow soldering : 30°C, 60% RH or lower

- Do not perform flow soldering.
- Make any necessary soldering corrections manually.
(Do not do this more than once for any given pin.)

Soldering iron : Less than 25 W
Temperature : Lower than 300°C
Time : Within 3 s

● Recommended soldering pattern

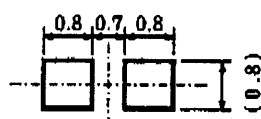

Unit in mm

TOSHIBA**TL(SU,OU,AU,YU,GU,PGU)1008(T04)****POST SOLDER CLEANING**

When cleaning after soldering is needed, the following condition must be adhered to.

Cleaning solvents : AK225 or Alcohol
Temperature : 50°C (max) for 30 s (max) or 30°C (max) for 3 minutes (max)
Ultrasonic : 300 W max

TAPING SPECIFICATIONS

This specification lays out the 4 mm pitch embossed-tape packing requirements for 1.6 mm (L) × 0.8 mm (W) × 0.6 mm (H) size surface-mount LED lamp.

1. Product Naming System

The type of package used for shipment is denoted by a symbol suffix after the product number. The method of classification is as below. (this method, however does not apply to products whose electrical characteristics differ from standard Toshiba specifications)

(1) Tape Type : T04 (4 mm pitch)

(2) Example

TLSU1008 (T04)
 └─── Tape Type
 └─── Toshiba Product No.

2. Related Matter

(1) Electro-optical Characteristics

Please refer to the each technical datasheet for electro-optical characteristics of tape packed products

(2) Handling Precautions

Tape material protected against static electricity. However, static electricity may occur depending on quantity of charged static electricity and a device may attach to a tape, or a device may be unstable when peeling a tape cover.

- In process, taping materials may sustain an electrostatic charge, use an ionizer to neutralize the ions.
- For transport and temporary storage of devices, use containers (boxes, jigs, bags) that are made of anti-static materials or of materials that dissipate electrostatic electricity.


TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

3. Dimensions of tape

(Unit in mm)

SYMBOL	DIMENSION	TOLERANCE	SYMBOL	DIMENSION	TOLERANCE
D	1.50	+0.1 / -0	P ₂	2.00	±0.05
E	1.75	±0.1	W	8.00	±0.1
P ₀	4.00	±0.1	P	4.00	±0.1
t	0.20	±0.05	A ₀	0.90	±0.1
F	3.50	±0.05	B ₀	1.75	±0.1
D ₁	0.60	±0.05	K ₀	0.75	±0.1

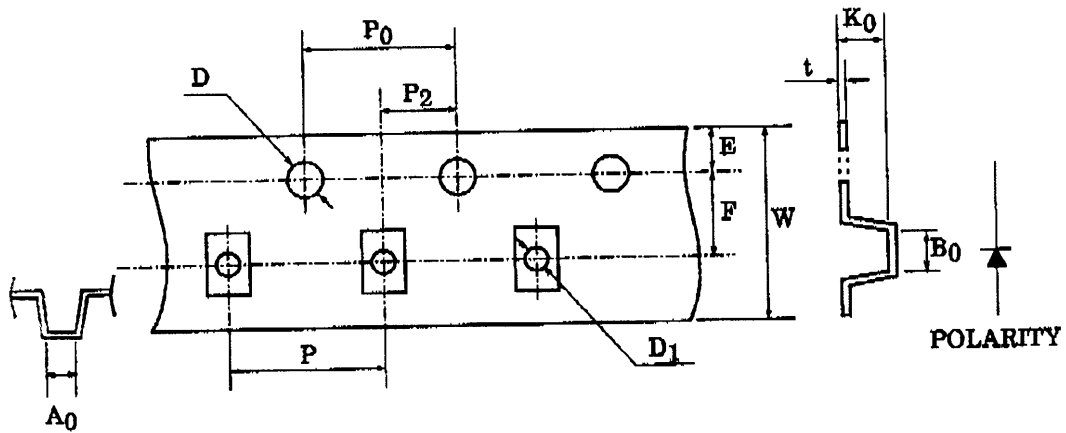


TOSHIBA


TL(SU,OU,AU,YU,GU,PGU)1008(T04)

4. Dimensions of reel

Unit in mm

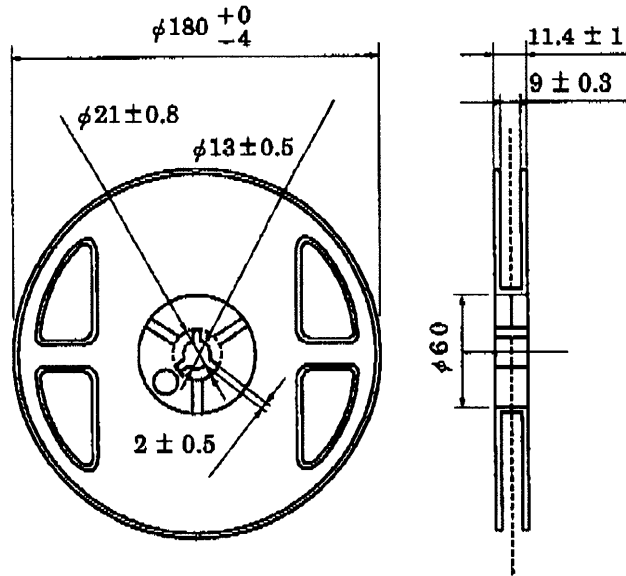

5. Leading part

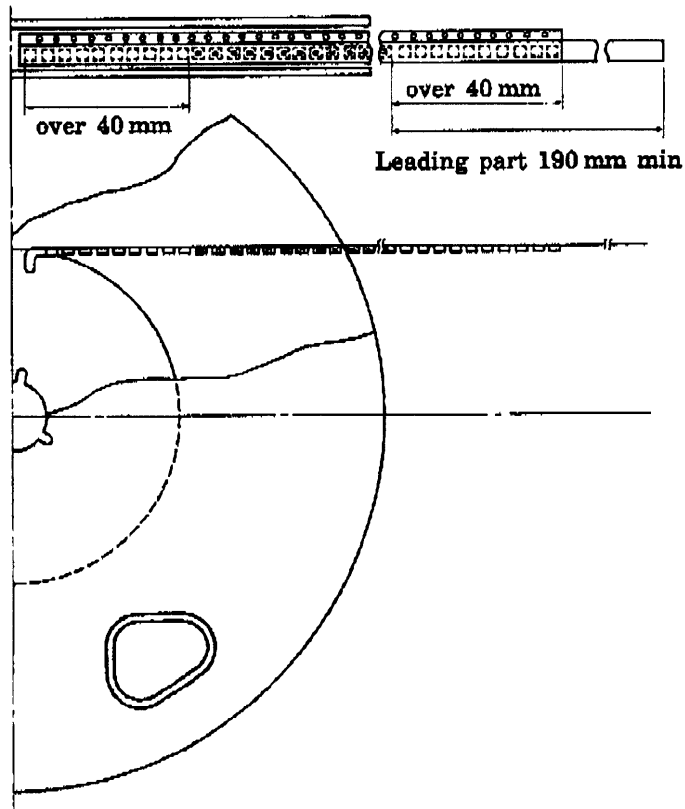

TOSHIBA

TL(SU,OU,AU,YU,GU,PGU)1008(T04)

6. Packing Form

(1) Number of Devices per Reel and Carton

Reel	4000 devices
Carton	20000 devices

(2) Packing : Silica gel and reel are packed into sealed aluminum pack.


7. Notation Method

(1) Example : TLSU1008 (T04)

P/N :

TYPE	TLSU1008		
ADD. C	(T04)	QTY	4000 pcs
NOTE	(rank symbol)		Lot Number

(2) Label location :

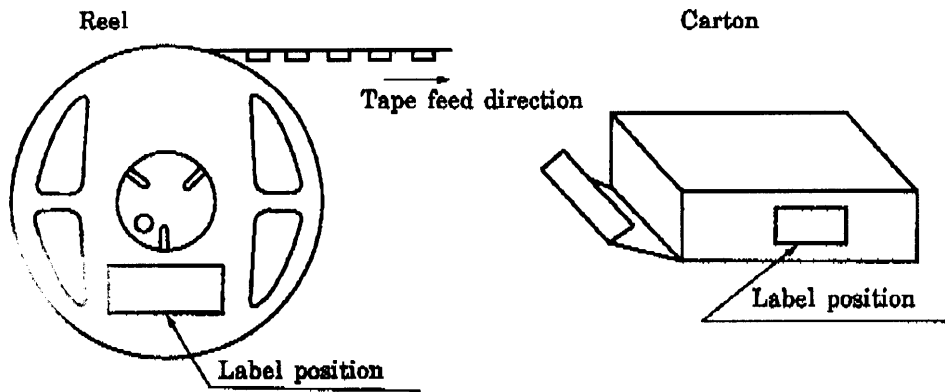

Aluminum pack : Attached to center of one side