2.54mm Pin Header Double Row, Vertical, Through Hole Type multicomp

RoHS Compliant

Specifications

Contact Resistance

Insulation Resistance

Withstanding Voltage

Current Rating

Voltage Rating

: 3A AC/DC


- : 250V AC/DC
- : 20m Max.
- : 1000MΩ Min.
- : 600V AC for one minute
- : -40°C to +105°C

Materials and Finish

Operating Temperature Range

- Insulator Insulator Colour Contact Material Plating
- : PBT (UL94V-0) : Black
- : Copper Alloy
- : Gold Plated



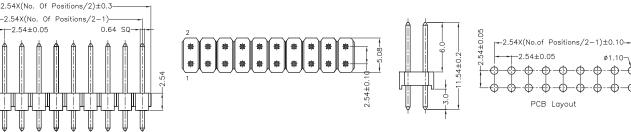

Dimensions : Millimetres

Part Number Table

Description	Part Number
Header, 2.54mm, Vertical, 26POS, 2ROW, TH	2213S-26G
Header, 2.54mm, Vertical, 30POS, 2ROW, TH	2213S-30G
Header, 2.54mm, Vertical, 50POS, 2ROW, TH	2213S-50G
Header, 2.54mm, Vertical, 60POS, 2ROW, TH	2213S-60G

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence. Multicomp is the registered trademark of the Group. © Premier Fannell Limited 2016.

www.element14.com www.farnell.com www.newark.com

