



PROJECTING THE FUTURE BYSINESS



:.cer P5230/ P5330W

4,200/ 4,500 lumens brightness Acer Bluelight Shield Acer LumiSense+ LAN control









| Model name | P5230 | P5330W |
|---------------------|--|--|
| Projection system | DLP® | |
| Resolution | XGA (1,024 x 768) | WXGA (1,280 x 800) |
| | Maximum WUXGA (1,920 x 1,200) | |
| Brightness | 4,200 ANSI Lumens (Standard), 3,360 ANSI Lumens (ECO), (Compliant with ISO 21118 standard | 4,500 ANSI Lumens (Standard), 3,600 ANSI Lumens (ECO), (Compliant with ISO 21118 standard) |
| Aspect ratio | 4:3 (Native), 16:9 (Supported) | 16:10 (Native),4:3/16:9 (Supported) |
| Contrast ratio | Dynamic Black 20,000:1 | |
| Throw ratio | 1.49 ~ 1.93 (66"@2m) | 1.19 ~ 1.54 (78"@2m) |
| Projection lens | F = 2.5 ~ 2.782, f = 16.91mm~21.60mm, Manual Zoom & Focus | |
| Keystone correction | +/-20° (Vertical, Manual & Auto), +/-20° (Horizontal, Manual), 4-Corner adjustment | |
| Lamp life | 4,000 Hours (Standard), 10,000 Hours (ECO), 15,000 Hours (ExtremeEco) | |
| Noise level | 31 dBA (Standard), 24 dBA (ECO) | |
| Input interface | Analog RGB/Component Video (D-sub) x 2 Composite Video (RCA) x 1 HDMI/MHL (Video, Audio, HDCP) x 1 HDMI (Video, Audio, HDCP) x 1 PC Audio (Stereo mini jack) x 1 | |
| Output interface | Analog RGB (D-sub) x 1 PC Audio (Stereo mini jack) x 1 DC Out (5V/2A, USB Type A) x 1 | |
| Control interface | USB (Type A) x 1, share output port | |
| Network interface | Ethernet port (RJ45) x 1 USB (Type A, internal) x 1, for optional wireless dongle | |
| Dimensions | 315 x 214 x 103 mm (12.4" x 8.4" x 4.1") | |
| Weight | 2.73 Kg (6 lbs) | |

Feature Highlights

Expressive display

- XGA (1,024 x 768) P5230
- WXGA (1,280 x 800) P5330W
- 4,200 ANSI lumens P5230 4,500 ANSI lumens P5330W
- Dynamic Black 20,000:1
- Acer Bluelight Shield
- Acer LumiSense+ Acer ColorBoost3D
- Acer ColorSafe II
- HDMI 3D with 144Hz 24p

Enhanced usability


- 16W built-in speaker
- Crestron® network system
- Mobile USB display¹
- Wireless Projection²
- · Hidden Dongle design

Installation flexibility

- 1.3X zoom
- H/V keystone correction
- 4-corner correction
- Auto ceiling mount correction

Eco-friendly functionality

- Acer EcoProjection
- Lamp life up to 15,000 hours in ExtremeEco mode
- 1. Mobile USB display can receive content with resolution up to 1080p. The display result will depend on projector's native resolution.
- 2. Optional Acer WirelessProjection-Kit, WirelessCAST, or WirelessHD-Kit is required. WirelessHD-Kit supports resolution up to 1080P, but P5230 & P5330W native resolution in XGA & WXGA

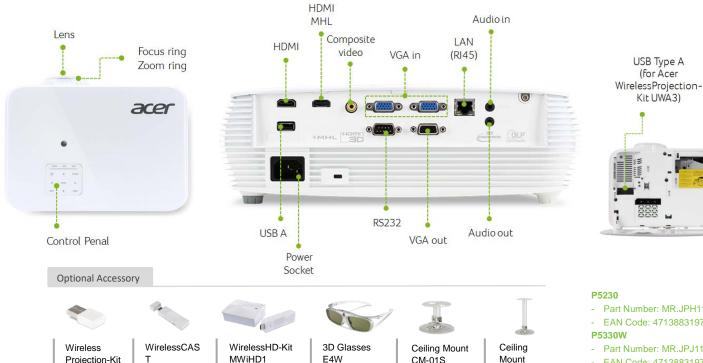

MC.JFZ11.00B

4713147532261

Part Number: MR.JPH11.001 EAN Code: 4713883197533

Part Number: MR.JPJ11.001 EAN Code: 4713883197663

Acer Bluelight Shield

MWA3

MC.JKY11.007

4713147653638



EAN:

UWA3

MC.JG811.00E

4713147497812

BluelightShield™

Acer Bluelight shield allows users to lower levels of blue light to lessen the negative effects of blue light exposure. There are three levels of filter in projector suitable for different scenario. Each level also contains dynamic mechanism that will optimize the blue light level based on content. Bluelight shield can reduces up to 30% blue light and protect your eyes.

MC.JKY11.009

4713147715251



MC.JLC11.002

4713147892877

Acer LumiSense+

CM-02S

MC.JLC11.003

4713147892884

With an embedded light sensor, projector can detect ambient light conditions and dynamically optimizes brightness levels and color saturation accordingly. Content-aware technology also analyzes projected contents frame by frame and dynamically adjusts image visibility to the optimum level.



