


RoHS  
Compliant



## Description

The standard cable ties feature inside serrations providing a positive hold onto wire and cable bundles. The head design guarantees high tensile strength, as well as a low insertion force. The bent tail design allows quick and simple installations by hand. For high volume applications, tensioning tools are available to ensure consistent and safe installation.


## Features

- Heat stabilized cable ties provide excellent resistance to high heat exposures.
- Inside serrations allow for strong hold on cables and wire bundles.
- Head design provides high tensile strength with very low insertion force.
- Bent tail ensures a quick and simple installation.

## Specifications

Min. Tensile Strength (Imperial)	: 18lbs.
Min. Tensile Strength (Metric)	: 80 (Newtons)
Length (Imperial)	: 5.5"
Length (Metric)	: 140mm
Releasable Closure	: No
Tie Closure	: Plastic Pawl
Variant	: Inside Serrated
Width (Imperial)	: 0.1"
Width (Metric)	: 2.5mm
Bundle Diameter Min. (Imperial)	: 0.06"
Bundle Diameter Min. (Metric)	: 1.5mm
Bundle Diameter Max. (Imperial)	: 1.38"
Bundle Diameter Max. (Metric)	: 35mm
Colour	: Black
Material	: Polyamide 6.6 heat stabilized (PA66HS)
Flammability	: UL 94 V2
Halogen free	: Yes
Operating Temperature Range	: -40°C to +125°C (-40°F to +257°F)

## Dimensions

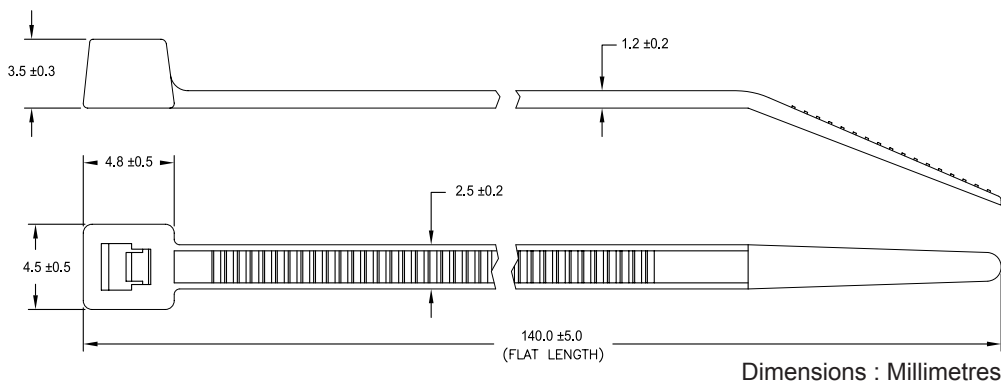

## Part Number Table

Description	Package	Part Number
Heat Stabilized Cable Tie, 5.5" Long, 18lbs Tensile Strength, PA66HS, Black	100	8409-0369

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell Limited 2016.