

**SAI-M23-SE-19****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

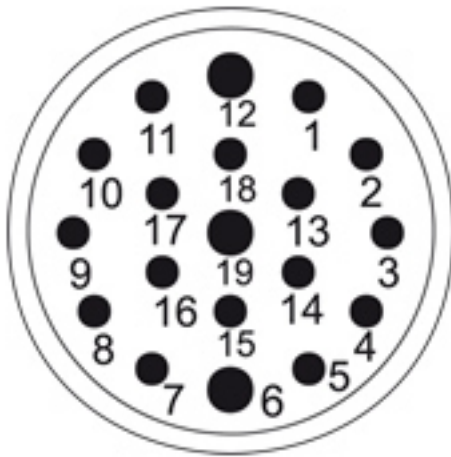

The M23 round plug-in connectors offer a high number of mating cycles, high current-carrying capacity and high contact-density coupled with minimum dimensions. Enclosures, inserts and crimp contacts need to be ordered separately.

**General ordering data**

Type	SAI-M23-SE-19
Order No.	<a href="#">1170120000</a>
Version	Sensor/Actuator plug-in connector, Insert
GTIN (EAN)	4032248962068
Qty.	1 pc(s).

**SAI-M23-SE-19**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Dimensions and weights**

Net weight 3 g

**Temperatures**

Operating temperature, max. 125 °C      Operating temperature, min. -40 °C

**Standards**

Certificate No. (UR) E344862

**General data**

Coding	none	Conductor O.D.	-
Contact number / diameter	16 x 1 mm + 3 x 1.5 mm	Contact surface	Gold-plated
Design	Male	Fire behaviour	V-0
Housing main material	Thermoplastic polyamide PA 6, PBT	Insulation resistance	> 10 <sup>6</sup> mΩ
No. of poles	19	Plugging cycles	> 1000
Type of connection	Crimp connection	connection thread	M23

**Classifications**

ETIM 5.0	EC002635	ETIM 6.0	EC000438
eClass 6.2	27-06-91-90	eClass 7.1	27-06-91-90
eClass 8.1	27-06-91-90	eClass 9.0	27-06-91-90
eClass 9.1	27-44-02-05		

**Product information**

Product information Enclosures, inserts and crimp contacts need to be ordered separately.

**Approvals**

Approvals



ROHS Conform

**Downloads**


Brochure/Catalogue [CAT 8 SAI 15/16 EN](#)  
[FL FIELDWIRING EN](#)

**SAI-M23-SE-19**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Dimensioned drawing**

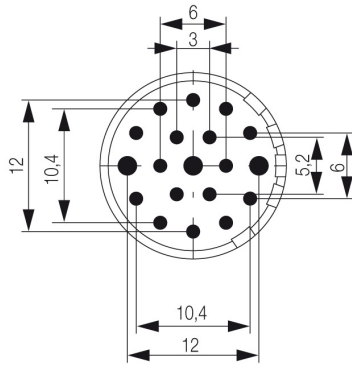

Technical data

Number of positions	6	7	9	12	16	17	19		
Number of contacts	6	7	8	1	12	16	17	16	3
Contact	mm	2	2	1	2	1	1	1	1.5