

Intrinsically Safe Led Flashlight For Use In Zone 0 Hazardous Areas



Up to 80hrs operation

Key features:

- Intrinsically safe LED flashlight for use in Zone 0 hazardous areas
- Up to 30 Metre beam
- High powered LED - CREE XP-G2
- Waterproof up to 1m (IPX7)
- Powered by 3x AAA Cell batteries
- Switch push button on tail
- Aluminium heat sink enhancing LED efficiency
- Drop proof up to 1m
- Designed to meet IP67
- Easy to use, maintenance free



IECEX




RoHS



NSEX125 Certifications:

UL	CLASS I DIV 1 GRP ABCD CLASS II DIV 1 GRP EFG CLASS III TEMP CODE: T4
ATEX	Ex: II 1 G Ex ia IIC T4
IECEX	Ex ia IIC T4 Ga
Reach	Approved
RoHS	Approved
CE	Approved

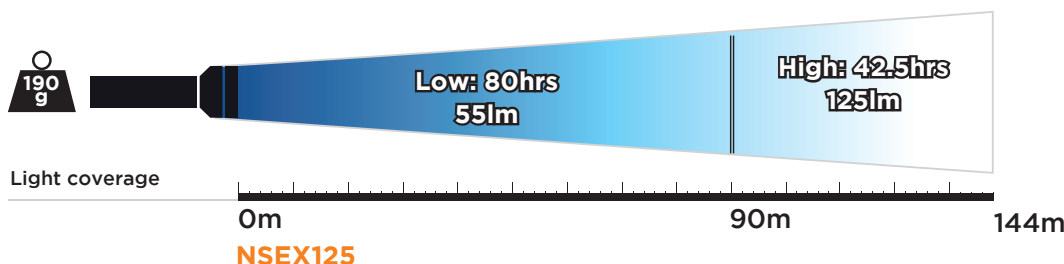

INTRINSICALLY SAFE
LED HEAD TORCH FOR
USE IN ZONE 0
HAZARDOUS AREA

PRODUCT CODE	DIMENSIONS
NSEX125	(L)225x(D)60mm