


DO NOT SCALE DRAWING

REVISION

A INITIAL DRAWING DW 22.12.15

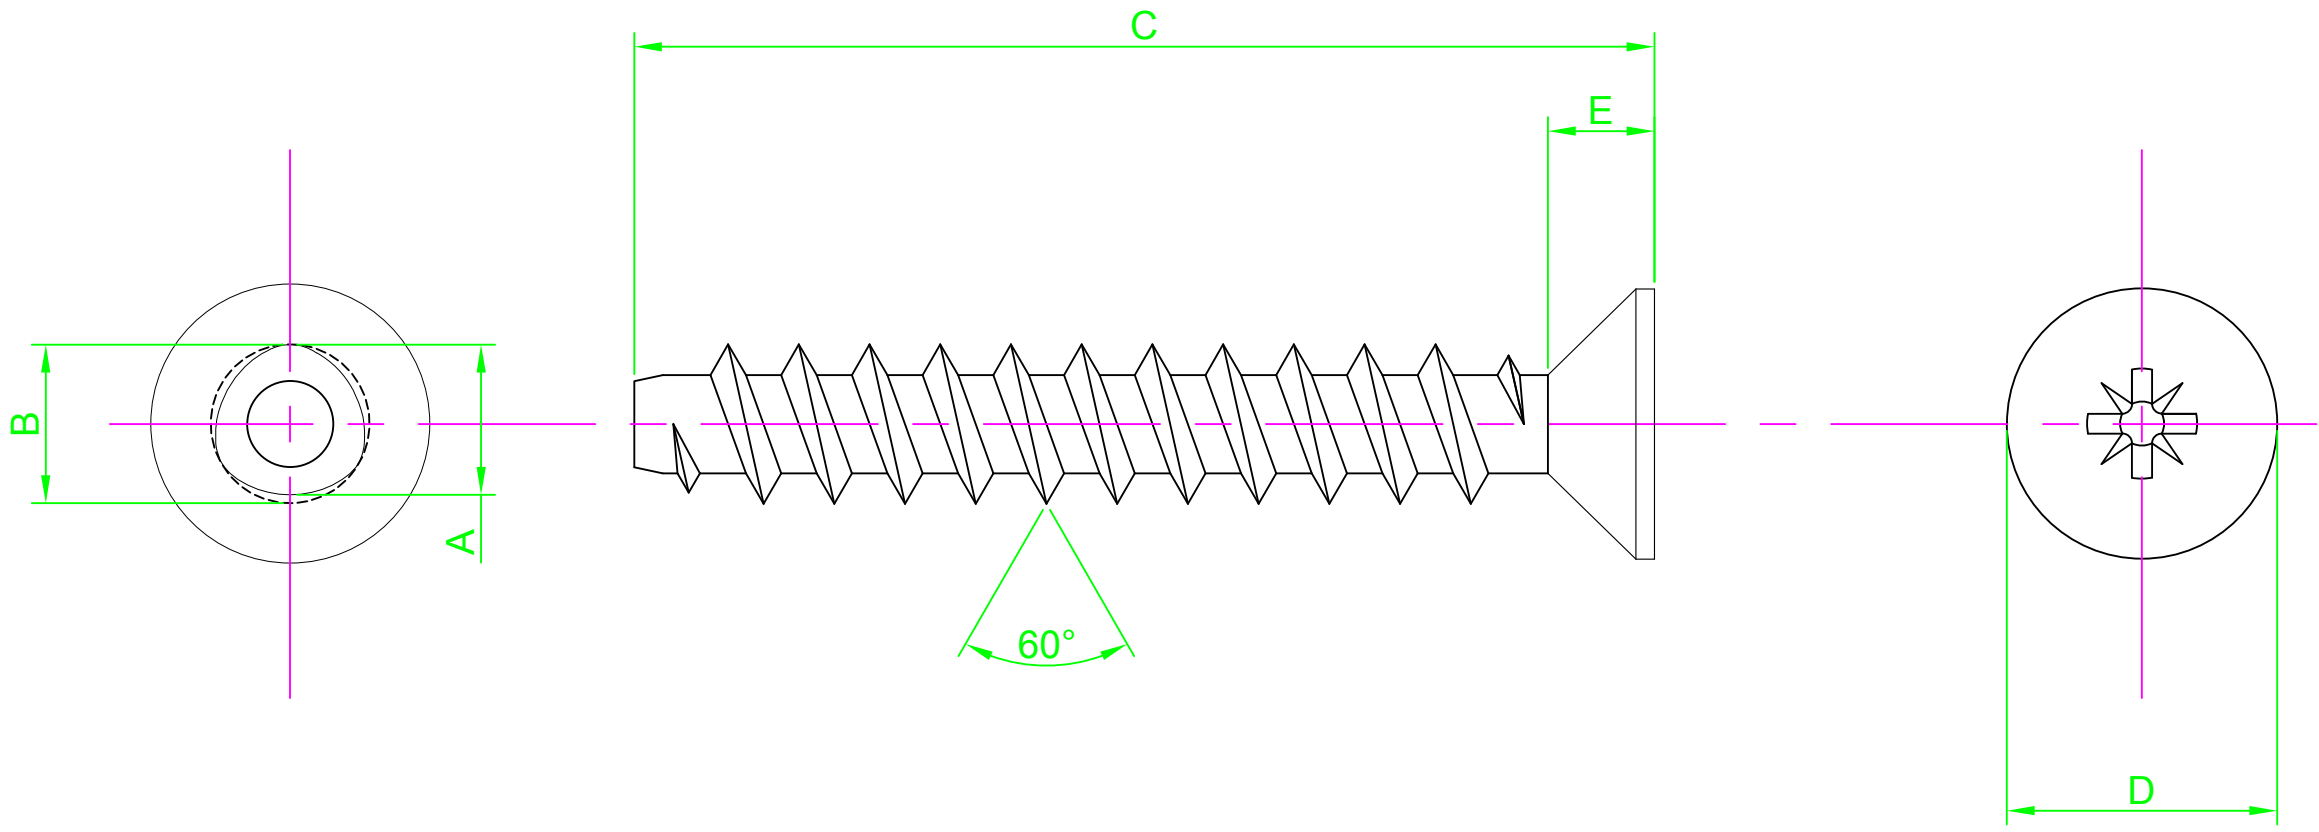

| Part Number          | Size  | A Max | B Max | Recess Size | C            | D Ref | E Max |
|----------------------|-------|-------|-------|-------------|--------------|-------|-------|
| N4 0.375 KRST60 Z100 | N4-20 | 0.123 | 0.127 | Pozi No 1   | 0.375 (3/8") | 0.225 | 0.067 |
| N6 0.375 KRST60 Z100 | N6-19 | 0.143 | 0.147 | Pozi No 2   | 0.375 (3/8") | 0.279 | 0.083 |

NOTES:  
Other Sizes / Lengths available on request



DESIGN RIGHT. TR FASTENINGS LTD, 2003  
UNDER NO CIRCUMSTANCES MUST THIS  
DRAWING BE COPIED OR DISCLOSED  
WITHOUT FIRST OBTAINING WRITTEN  
AUTHORITY.

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN Inches  
SURFACE FINISH:  
TOLERANCES:

|       | NAME          | DATE     |
|-------|---------------|----------|
| DRAWN | Darryl Wilson | 22.12.15 |
| CHK'D |               |          |
| APPVD |               |          |

MATERIAL:  
Steel

HEAT TREATMENT:  
Through Hardened

FINISH:  
TC1D - Commercial Zinc/Clear Trivalent  
De-Embrittle

TITLE:  
Pozi Csk Head Plas-Fix 60 Screw for Plastic

DRAWING NUMBER:  
TR32KRST60Z100

A4