

# AV600 Passthrough Powerline Starter Kit

## TL-PA4010P KIT

### ⦿ Features:

- Data transfer rate up to 600Mbps over electrical wires, ideal for HD video streaming
- Embedded power socket ideal for other devices using the same outlet
- No new wires or drilling required, just use existing electrical wires
- No setup required, simply plug and play
- Up to 300 meters range over the household power circuit for better performance through walls or across floors
- Power-Saving Mode automatically reduces power consumption by up to 85%\*
- 128-bit AES encryption easily at a push of "Pair" Button
- QoS provides networking flexibility and stable IPTV streaming and online gaming

\* Actual data will vary because of the network conditions and environment factors.



### ⦿ Description:


TP-LINK's AV600 Passthrough Powerline Starter Kit, TL-PA4010P KIT turns your existing powerline into a high speed network with no need for new wires or drilling. No configuration is required, simply plug your adapter into your power sockets and you can establish networking infrastructure in a flash. What's more, its integrated power socket allows an additional device or power bar to be connected to the adapter as though it were a normal wall socket. With speeds up to 600Mbps, TL-PA4010P KIT is a great choice for an easy to build multimedia entertainment network.

## Specifications:

| Hardware Features        |   |
|--------------------------|---|
| Standards and Protocols  | HomePlug AV, IEEE802.3, IEEE802.3u            |
| Interface                | 1* 10/100Mbps Ethernet Port, Power Socket     |
| Plug Type                | UK  |
| Button                   | Pair Button                                   |
| LED Indicator            | Power, Powerline, Ethernet                    |
| Dimensions ( W x D x H ) | 3.7 x 2.3 x 1.7 in. (95 x 58 x 42 mm)         |
| Power Consumption        | < 2.6 W                                       |
| Range                    | 300 meters in house                           |
| Software Features        |   |
| Modulation Technology    | OFDM  |
| Encryption               | 128-bit AES Encryption                        |
| Others                   |   |
| Certifications           | CE, RoHS                                      |
| System Requirements      | Windows 10/8.1/8/7/Vista/XP/2000, Mac, Linux* |
| Environment              | Operating Temperature: 0°C~40°C (32°F~104°F)  |
|                          | Storage Temperature: -40°C~70°C (-40°F~158°F) |
|                          | Operating Humidity: 10%~90% non-condensing    |
|                          | Storage Humidity: 5%~90% non-condensing       |

\* Utility currently supports Windows 10/8.1/8/7.

## Diagram:

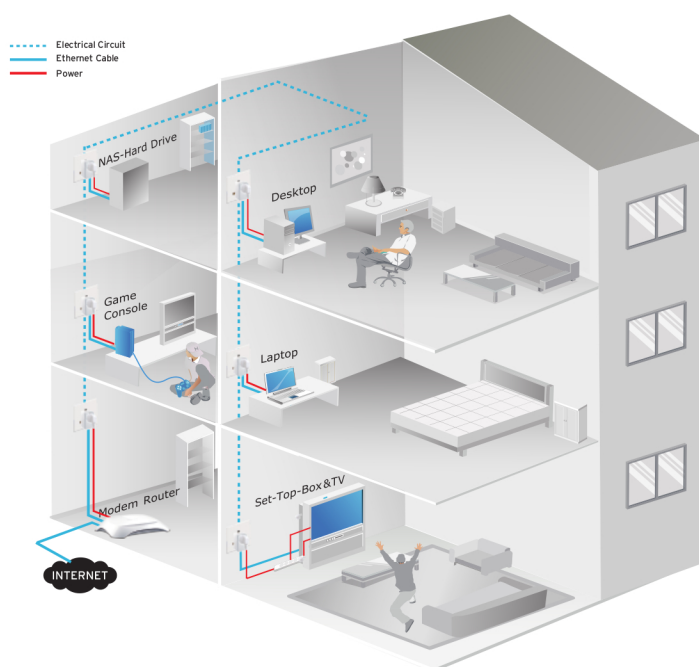

### Package:

- AV600 Passthrough Powerline Adapter TL-PA4010P \*2
- 2-meter RJ-45 Ethernet Cable \*2
- Quick Installation Guide

\* Powerline adapters should be deployed on the same circuit and in set of two or more. The first, connected to the router and others located elsewhere to enable connectivity in those locations



# 5/8-Port 10/100Mbps Desktop Switch

Fast Ethernet Wired Network  
Expansion Solution

TL-SF1005D/TL-SF1008D




# Overview

The 5/8-Port 10/100Mbps desktop switch TL-SF1005D/TL-SF1008D provide an easy way to expand your wired network. All RJ45 ports support Auto MDI/MDIX, eliminating the need to worry about the type of cable to use. Featuring full duplex mode, the switches can process data at a rate of up to 200Mbps making it an ideal choice for expanding your high performance wired network

Moreover, with innovative energy-efficient technology, the TL-SF1005D/TL-SF1008D can save power consumption, making them an eco-friendly solution for your home or office network.

TL-SF1005D is used for demonstration here.

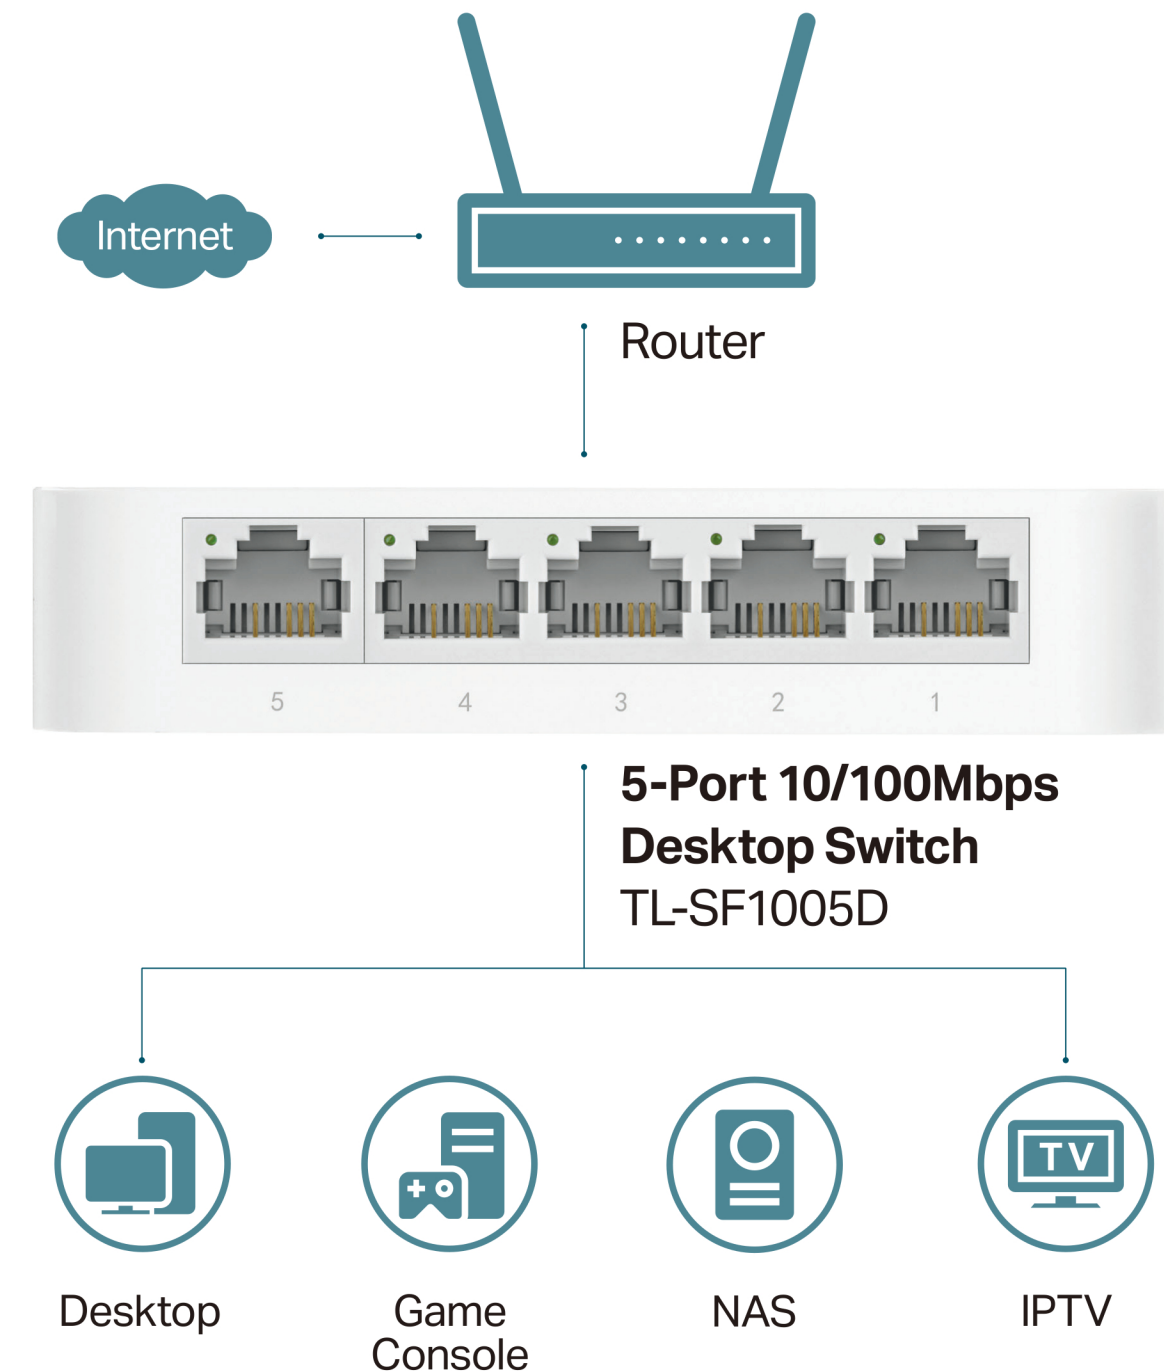



# Features



## Fast Ethernet Expansion Solution

- TL-SF1005D equips 5 10/100Mbps ports, providing up to 1Gbps switching capacity
- TL-SF1008D equips 8 10/100Mbps ports, providing up to 1.6Gbps switching capacity
- IEEE 802.3x flow control provides reliable data transfer



## Highlight Performance

- Fanless design ensures quiet operation
- Green technology reduces power consumption



## Easy to Use

- Just plug and play, no configuration required
- Auto MDI/MDIX eliminates the need for crossover cables
- Auto-negotiation intelligently adjusts for compatibility and optimal performance

# Specifications

· Interface:

TL-SF1005D: 5 10/100Mbps RJ45 Ports, Auto Negotiation, Auto MDI/MDIX

TL-SF1008D: 8 10/100Mbps RJ45 Ports, Auto Negotiation, Auto MDI/MDIX

· Standards: IEEE 802.3, IEEE 802.3u, IEEE 802.3x

· Transmission Method : Store and Forward

· Advanced Functions: Green Technology, 802.3x Flow Control

· Max Power Consumption (220V/50Hz):

TL-SF1005D: 1.87W; TL-SF1008D: 2.05W

· Power Supply: External Power Adapter (Output: 9VDC / 0.6A)

· Certification: FCC, CE, RoHs

· Environment:

Operating Temperature: 0℃~40℃ (32°F ~104°F)

Storage Temperature: -40℃~70℃ (-40°F ~158°F)

Operating Humidity: 10%~90%RH, non-condensing;


Storage Humidity: 5%~90%RH, non-condensing

· Dimensions (W x D x H):


TL-SF1005D: 4.1 × 2.8 × 0.9 in. (103.5 × 70 × 22 mm)

TL-SF1008D: 5.3 × 3.1 × 0.9 in. (134.5× 79 × 22.5 mm)

· TL-SF1005D:

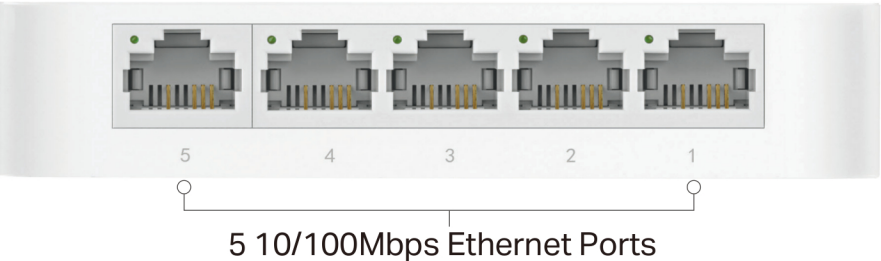

· TL-SF1008D:

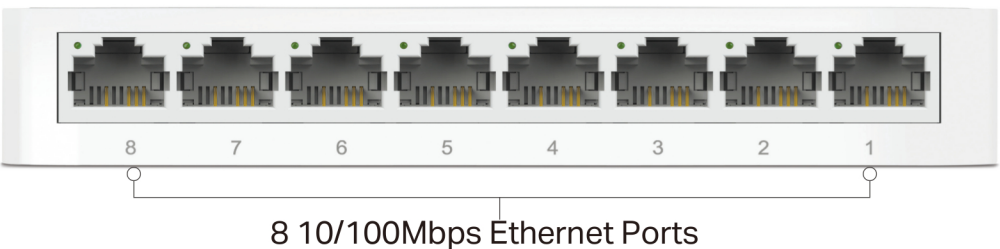

· Package Contents:

5/8-Port 10/100Mbps Desktop Switch TL-SF1005D/TL-SF1008D

Power Adapter

Installation Guide



For more information, please visit

<http://www.tp-link.com/en/products/details/TL-SF1005D.html> & <http://www.tp-link.com/en/products/details/TL-SF1008D.html>

or scan the QR code left and search for your product.

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-Link Technologies Co., Ltd.

[www.tp-link.com](http://www.tp-link.com)