

QUADSAW[®]

THE SQUARE HOLE CUTTER


INSTRUCTIONS:

1. You **MUST** use a drill with a no load rpm of between 2000 rpm and 2500 rpm
2. **DO NOT** use a percussion or hammer setting on your drill.
3. **NEVER** change the blades or the pilot drill while the QUADSAW[®] is attached to a drill.
4. Instructions for use can be reviewed at www.quadsaw.com/instructions
5. Use of the QUADSAW[®] is in accordance with terms and conditions of use which can be viewed at www.quadsaw.com/terms
6. Always use personal protection equipment when using the QUADSAW[®]




QUADSAW®

Blade Changing Instructions

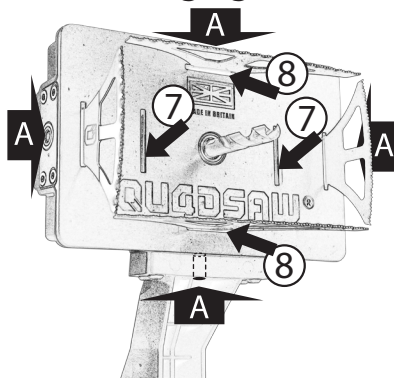

The four blade release buttons (A) are located in the centre of the bush mounting plates.
(Indicated by arrows marked 'A' above)

Tools: Any Pointed Instrument e.g.

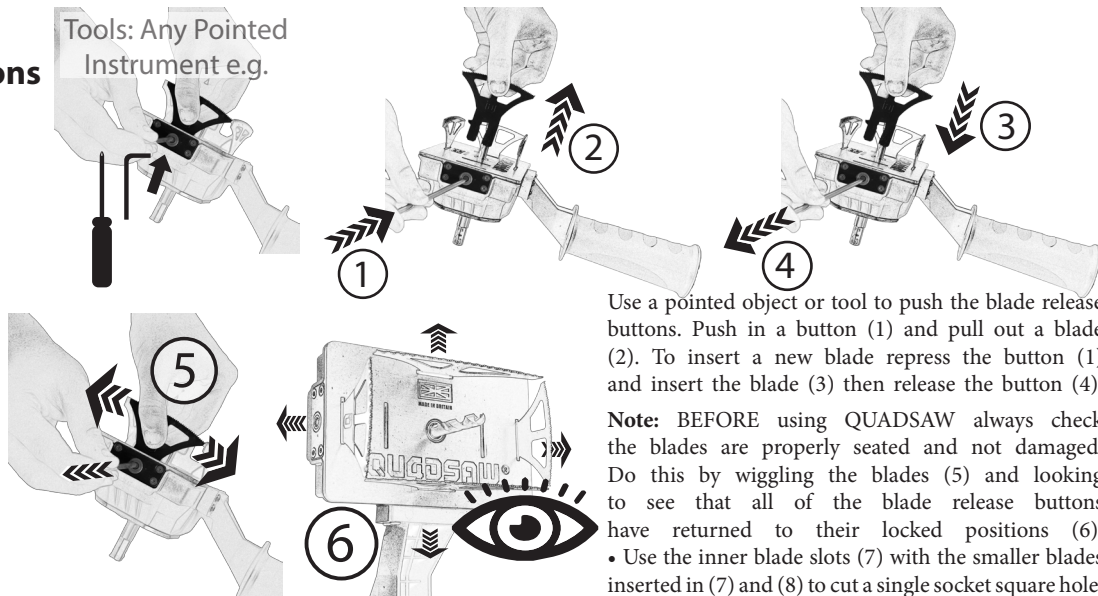

Use a pointed object or tool to push the blade release buttons. Push in a button (1) and pull out a blade (2). To insert a new blade repress the button (1) and insert the blade (3) then release the button (4).

Note: BEFORE using QUADSAW always check the blades are properly seated and not damaged. Do this by wiggling the blades (5) and looking to see that all of the blade release buttons have returned to their locked positions (6).

• Use the inner blade slots (7) with the smaller blades inserted in (7) and (8) to cut a single socket square hole.