

TLE9461-3ES V33

Lite CAN SBC Family




1 Overview

Features

Key Features

- Very low quiescent current consumption in Stop- and Sleep Mode
- Periodic Cyclic Wake in SBC Normal-, Stop- and Sleep Mode
- Periodic Cyclic Sense in SBC Normal-, Stop- and Sleep Mode
- Low-Drop Linear Voltage Regulator 3.3 V, 150 mA (250 mA peak) for main supply,
- Low-Drop Linear Voltage Regulator 5 V, 100 mA, protection feature for off-board usage
- High-Speed CAN transceiver supporting FD communication up to 5 Mbit/s and featuring CAN Partial Networking & CAN FD tolerant mode according to ISO 11898-2:2016 & SAE J2284
- Fully compliant to "Hardware Requirements for LIN, CAN and FlexRay Interfaces in Automotive Applications" Revision 1.3, 2012-05-04
- Charge pump-output for N-channel MOSFET reverse-polarity protection or load switch feature with integrated spread spectrum modulation feature for optimum EMC performance
- Universal High-Voltage Wake input for voltage level monitoring and wake-up detection
- General Purpose High-Voltage in- and output (GPIO) configurable as Fail Output, Wake Input, Low-Side switch or High-Side switch
- High-Voltage Measurement function as alternate pin assignment
- Fail Output for Fail-Safe signalization
- Configurable wake-up sources
- Reset & Interrupt outputs
- Configurable timeout and window watchdog
- Overtemperature and short circuit protection feature
- Dedicated TEST pin for SBC Development Mode entry (watchdog counter stopped)
- Software compatible to other SBC families TLE926x and TLE927x
- Wide input voltage and temperature range
- Optimized for Electromagnetic Compatibility (EMC) and low Electromagnetic Emission (EME)
- Optimized for high immunity against Electromagnetic Interference (EMI)
- AEC Qualified & Green Product (RoHS compliant)





Overview

Scalable System Basis Chip (SBC) Family

- Product family for complete scalable application coverage
- Optimized feature set for optimal system design
- Dedicated Data Sheets are available for all product variants
- Complete compatibility (hardware- and software across the family)
- Same PG-TSDSO-24-1 package with exposed pad (EP) for all product variants
- CAN Partial Networking variants (-3ES)
- Product variants for 5 V (TLE94xxyy) and 3.3 V (TLE94xxyyV33) output voltage for main regulator
- Software compatible to other SBC families TLE926x and TLE927x

Potential applications

- HVAC ECU and Control panel
- Light Control Unit (LCU) for front, rear and ambient
- Seat control module
- Seat belt pretension
- Steering column and steering lock
- Closure (trunk, sliding door, etc.)
- Gear shifters and selectors
- Smart power distribution modules

Product validation

Qualified for automotive applications. Product validation according to AEC-Q100/101.

Description

The TLE9461-3ES V33 is a monolithically integrated circuit in an exposed pad PG-TSDSO-24-1 (150 mil) power package. The device is designed for various CAN automotive applications as main supply for the microcontroller and as interface for a CAN bus network.

To support these applications, the System Basis Chip (SBC) provides the main functions, such as a 3.3 V lowdropout voltage regulator (LDO) for e.g. a microcontroller supply, another 5 V low-dropout voltage regulator with off-board protection for e.g. sensor supply, a HS-CAN transceiver supporting CAN FD and CAN Partial Networking (incl. FD tolerant mode) for data transmission, a high-voltage GPIO with embedded protective functions and a 16-bit Serial Peripheral Interface (SPI) to control and monitor the device. Also a configurable timeout / window watchdog circuit with a reset feature, one dedicated fail output and an undervoltage reset feature are implemented.

The device offers low-power modes in order to minimize current consumption in applications that are connected permanently to the battery. A wake-up from the low-power mode is possible via a message on the CAN buses, via the bi-level sensitive monitoring/wake-up input as well as via Cyclic Wake.

The device is designed to withstand the severe conditions of automotive applications

Туре	Package	Marking
TLE9461-3ES V33	PG-TSDSO-24-1	TLE9461-3ESV33





Table of Contents

1	Overview	. 1
2	Block Diagram	. 7
3 3.1 3.2 3.3 3.4	Pin Configuration Pin Assignment Pin Definitions and Functions Hints for Unused Pins Hints for Alternate Pin Functions	8 8 10
4 4.1 4.2 4.3 4.4	General Product Characteristics	11 13 14
5 5.1 5.1.1 5.1.1 5.1.1.2 5.1.2 5.1.2 5.1.3	System Features Block Description of State Machine Device Configuration and SBC Init Mode SBC Init Mode SBC Normal Mode SBC Stop Mode	20 21 21 24 25
5.1.4 5.1.5 5.1.6 5.1.7 5.1.8	SBC Sleep Mode SBC Restart Mode SBC Fail-Safe Mode SBC Development Mode Electrical Characteristics for Pin TEST	27 28 29 30
5.2 5.2.1 5.2.1.1 5.2.1.2 5.2.2	Wake Features Cyclic Sense Configuration and Operation of Cyclic Sense Cyclic Sense in Low-Power Mode Cyclic Wake	33 34 37
5.2.2 5.2.3 5.3 5.3.1 5.4 5.4.1	Internal Timer Charge Pump Output for Reverse Polarity Protection Electrical Characteristics for Charge Pump High-Voltage Measurement Interface Block Description	38 39 40 41
5.4.2 5.4.3 5.5 5.6	Functional Description Electrical Characteristics for Measurement Interface Spread Spectrum Modulation Frequency Function Partial Networking on CAN	41 43 44
5.6.1 5.6.2 5.6.2.1 5.6.2.2	CAN Partial Networking - Selective Wake Feature	45 46 47
5.6.2.3 5.6.2.4 5.6.3	Wake-up Frame (WUF) CAN Protocol Error Counter Diagnoses Flags	48 49



7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.3 8.2.4 8.2.5 8.2.6 8.2.7	Voltage Regulator 2 Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description Functional Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode CAN Bus termination TXD Time-out Feature Bus Dominant Clamping Undervoltage Detection Electrical Characteristics	66 67 67 68 71 71 73 73 74 74 75 75 76 76 76 77
7 7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.3 8.2.4 8.2.5 8.2.6 8.2.7 8.2.8	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode CAN Bus termination TXD Time-out Feature Bus Dominant Clamping Undervoltage Detection	66 67 68 .71 71 73 73 74 74 75 75 76 76
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.3 8.2.4 8.2.5 8.2.6 8.2.7	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode CAN Bus termination TXD Time-out Feature Bus Dominant Clamping	66 67 67 68 .71 71 71 73 73 74 74 75 75 75
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.3 8.2.3 8.2.4 8.2.5 8.2.6	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode CAN Bus termination TXD Time-out Feature	66 67 67 68 71 71 73 73 73 74 74 75 75
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.3 8.2.4 8.2.4 8.2.5	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode CAN Wake Capable Mode CAN Bus termination	66 67 68 71 71 73 73 74 74 74 75
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.2 8.2.3 8.2.4	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode CAN Wake Capable Mode	66 67 68 . 71 71 71 73 73 74 74
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2 8.2.3	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description CAN Off Mode CAN Normal Mode CAN Receive Only Mode	66 67 68 . 71 71 73 73 74
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1 8.2.2	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description CAN Off Mode CAN Normal Mode	66 67 67 68 . 71 71 71 73 73
7.1 7.2 7.2.1 7.3 8 8.1 8.2 8.2.1	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description CAN Off Mode	66 67 68 . 71 71 71 73
7.1 7.2 7.2.1 7.3 8 8.1 8.2	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description Functional Description	66 67 67 68 . 71 71 71
7.1 7.2 7.2.1 7.3 8 8.1	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver Block Description	66 67 67 68 . 71 71
7.1 7.2 7.2.1 7.3 8	Block Description Functional Description Short to Battery Protection Electrical Characteristics High-Speed CAN FD Transceiver	66 67 67 68 . 71
7.1 7.2 7.2.1 7.3	Block Description Functional Description Short to Battery Protection Electrical Characteristics	66 67 67 68
7.1 7.2 7.2.1	Block Description Functional Description Short to Battery Protection	66 67 67
7.1 7.2	Block Description	66 67
7.1	Block Description	66
-		
7		66
6.3	Electrical Characteristics	64
6.2	Functional Description	63
6.1	Block Description	62
6	Voltage Regulator 1	. 62
5.6.9	Electrical Characteristics	
5.6.8.2	Setup of Clock and Data Recovery	
5.6.8.1	Configuring the Clock Data Recovery for SWK	
5.6.8	Clock and Data Recovery	
5.6.7	Configuration for SWK	
5.6.5 5.6.6	Wake-up	
5.6.5 5.6.5		
5.6.4.4	SBC Fail-Safe Mode with SWK	
5.6.4.3	SBC Restart Mode with SWK	
5.6.4.2	SBC Stop Mode with SWK	
5.6.4.1	SBC Stop Mode with SWK	
5.6.4.1	SBC Normal Mode with SWK	
5.6.4	SBC Modes for Selective Wake (SWK)	
5.6.3.11	SWK_SET FLAG (SWK_SET)	
5.6.3.10	SYNC-FLAG (SYNC)	
5.6.3.9	CAN Bus Silence-Flag (CANSIL)	
5.6.3.8	CAN Bus Timeout-Flag (CANTO)	
5.6.3.7	Configuration Error	
5.6.3.6	SYSERR Flag (SYSERR)	
5.6.3.5	WUF Flag (WUF)	
5.6.3.4	WUP Flag	
-	TXD Dominant Time-out flag	
	BUSERR-Flag	
5.6.3.2 5.6.3.3		50



9.1 9.2 9.2.1 9.2.2 9.2.3 9.2.4 9.3	Block DescriptionHigh-Voltage Wake FunctionFunctional DescriptionWake Input ConfigurationWake configuration for Cyclic SenseHigh-Voltage Sensing as Alternate FunctionElectrical Characteristics	85 85 86 87 87
10 10.1 10.2	Interrupt Function Block and Functional Description Electrical Characteristics	89
11 11.1 11.1.1 11.1.2 11.1.3 11.2	Fail Output (FO) and General Purpose I/O (GPIO)Block and Functional DescriptionFail-Output FunctionGeneral Purpose I/O Function as Alternate FunctionWK and FO/GPIO HV-Sensing Function as Alternative FunctionElectrical Characteristics	
12 12.1	Supervision Functions	
12.1.1	Reset Output Description	100
12.1.2	Soft Reset Description	101
12.2	Watchdog Function	102
12.2.1	Time-Out Watchdog	103
12.2.2	Window Watchdog	103
12.2.3	Watchdog Setting Check Sum	104
12.2.4	Watchdog during SBC Stop Mode	104
12.2.5	Watchdog Start in SBC Stop Mode due to Bus Wake	105
12.3	VS Power-On Reset	106
12.4	VS Under- and Overvoltage	107
12.4.1	VS Undervoltage	107
12.4.2	VS Overvoltage	107
12.5	VCC1 Over-/ Undervoltage and Undervoltage Prewarning	107
12.5.1	VCC1 Undervoltage and Undervoltage Prewarning	
12.5.2	VCC1 Overvoltage	108
12.6	VCC1 Short Circuit Diagnostics	
12.7	VCC2 Undervoltage and VCAN Undervoltage	109
12.8	Thermal Protection	110
12.8.1	Individual Thermal Shutdown	110
12.8.2	Temperature Prewarning	110
12.8.3	SBC Thermal Shutdown	110
12.9	Electrical Characteristics	111
13	Serial Peripheral Interface	
13.1	SPI Block Description	
13.2	Failure Signalization in the SPI Data Output	
13.3	SPI Programming	
13.4	SPI Bit Mapping	
13.5	SPI Control Registers	123





13.5.1	General Control Registers	126
13.5.2	Selective Wake Control Registers	138
13.6	SPI Status Information Registers	150
13.6.1	General Status Registers	151
13.6.2	Selective Wake Status Registers	158
13.6.3	Family and Product Information Register	160
13.7	Electrical Characteristics	161
14	Application Information	
14.1	Application Diagrams	
14.2	ESD Tests	169
14.3	Thermal Behavior of Package	170
14.4	Further Application Information	171
15	Package Outlines	
16	Revision History	



Block Diagram

2 Block Diagram

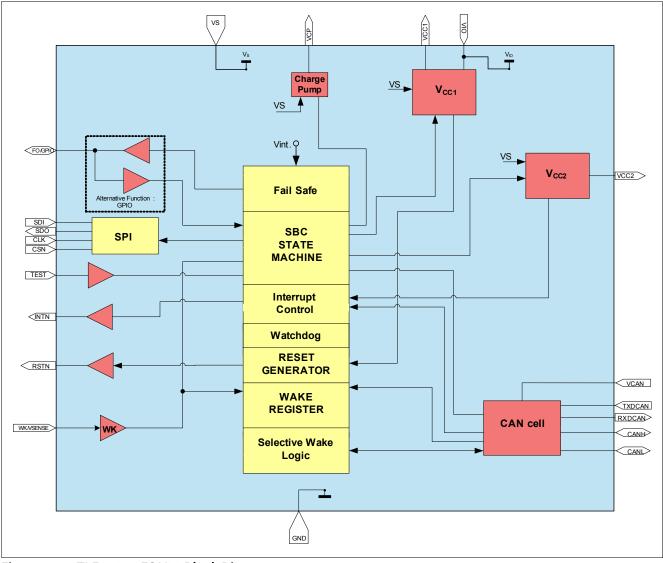



Pin Configuration



3 Pin Configuration

3.1 Pin Assignment

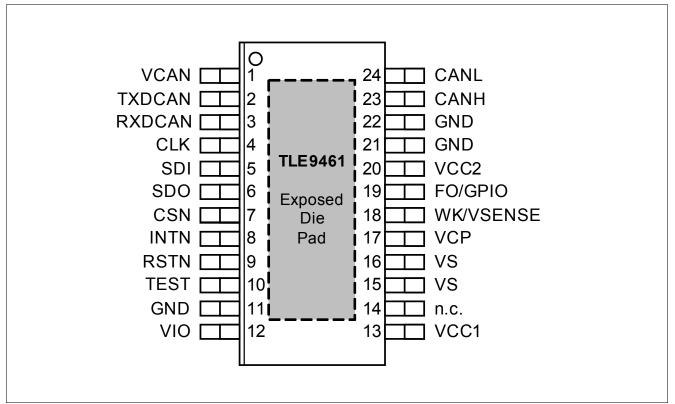


Figure 2 Pin Configuration

3.2 Pin Definitions and Functions

Pin	Symbol	Function
1	VCAN	HS-CAN Supply Input; Supply needed for CAN Normal and Receive Only Mode
2	TXDCAN	Transmit CAN
3	RXDCAN	Receive CAN
4	CLK	SPI Clock Input
5	SDI	SPI Data Input; input for SBC (=MOSI)
6	SDO	SPI Data Output; output from SBC (=MISO)
7	CSN	SPI Chip Select Input; active low
8	INTN	 Interrupt Output; used as wake-up flag for microcontroller in SBC Stop or Normal Mode and for indicating failures. Active low. During start-up used to set the SBC configuration in case of watchdog trigger failure. External pull-up (typ. 47 kΩ) sets config 1/3, otherwise config 2/4 is selected.



Pin Configuration

Pin	Symbol	Function
9	RSTN	Reset Output; active low, internal pull-up
10	TEST	Test Pin; Connect to GND or leave open for normal user mode operation; Connect to VCC1 at device power-on to activate SBC Development Mode (see Chapter 5.1.7). Integrated pull-down resistor.
11	GND	Ground; LDO 1 Power GND
12	VIO	Digital I/O Pin Voltage Supply; Must be connected to the buffered VCC1 voltage (see also Figure 50)
13	VCC1	Voltage Regulator 1 Output
14	n.c.	not connected; internally not bonded
15	VS	Supply Voltage; Supply for VCC1 power stage - both VS pins must be connected together on same battery potential for proper operation; Connect to battery voltage via reverse polarity protection diode and filter against EMC
16	VS	Supply Voltage; Main supply of device - both VS pins must be connected together on same battery potential for proper operation; Connect to battery voltage via reverse polarity protection diode and filter against EMC
17	VCP	Charge Pump Output; For driving the gate of external N-channel MOSFETs, e.g. for reverse polarity protection or Kl.30 load switch. Always place a 1kΩ resistor in series for protection
18	WK/VSENSE	Wake Input; Sense Input; Alternate function: HV-measurement function input
19	FO/GPIO	 Fail Output; Open Drain Output, active low; GPIO; Alternative function: configurable pin as WK, LS-, or HS-witch supplied by VS (default is FO, see also Chapter 11.1.1) Sense Output; Alternate function: if HV-measurement function is configured
20	VCC2	Voltage Regulator 2 Output
21	GND	Ground; Analog GND
22	GND	Ground; CAN GND
23	CANH	CAN High Bus Pin
24	CANL	CAN Low Bus Pin
Cooling Tab	GND	Cooling Tab - Exposed Die Pad; For cooling purposes only, connect to but do not use as an electrical ground ¹⁾

 The exposed die pad at the bottom of the package allows better power dissipation of heat from the SBC via the PCB. The exposed die pad is not connected to any active part of the IC. However, it should be connected to GND for the best EMC performance.

Note: Both VS Pins must be connected to same battery potential; all GND pins as well as the Cooling Tab must be connected to one common GND potential

TLE9461-3ES V33 Lite CAN SBC Family



Pin Configuration

3.3 Hints for Unused Pins

In case functions or pins are not used, it must be ensured that the configurations are done properly, e.g. disabled via SPI. Unused pins should be handled as follows:

- WK/VSENSE: connect to GND and disable WK inputs via SPI
- RSTN / INTN / FO: leave open
- VCC2: leave open and keep disabled
- VCAN: connect to VCC1
- CANH/L, RXDCAN, TXDCAN: leave all pins open
- TEST: Leave open or connect to GND for normal user mode operation or connect to VIO to activate SBC Development Mode;
- **n.c.**: not connected; internally not bonded; leave open
- If unused pins are routed to an external connector which leaves the ECU, then these pins should have provision for a jumper (depopulated if unused)

3.4 Hints for Alternate Pin Functions

In case of SPI selectable alternate pin functions, it must be ensured that the correct configurations are also selected via SPI (in case it is not done automatically). Please consult the respective chapter. In addition, following topics shall be considered:

- WK/VSENSE: The pin can be either used as high-voltage wake-up and monitoring function or for a voltage measurement function (via bit setting WK_MEAS = '1'). In the second case, the WK pin shall not be used / assigned for any wake-up detection nor Cyclic Sense functionality, i.e. WK must be disabled in the register WK_CTRL_1 and the level information must be ignored in the register WK_LVL_STAT.
- FO/GPIO: The pin can also be configured as a GPIO in the GPIO_CTRL register. In this case, the pin shall not be used for any fail output functionality.
 The default configuration after start up or power on reset (POP) is FO

The default configuration after start-up or power on reset (POR) is FO.



4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 1Absolute Maximum Ratings1)

 T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Voltages					·		
Supply Voltage VS	V _{S, max}	-0.3	-	28	V	-	P_4.1.1
Supply Voltage VS	V _{S, max}	-0.3	-	40	V	Load Dump, max. 400 ms	P_4.1.2
Voltage Regulator 1 Output	V _{CC1, max}	-0.3	-	5.5	V	2)	P_4.1.3
Voltage Regulator 2 Output	V _{CC2, max}	-0.3	_	28	V	V _{CC2} = 40 V for Load Dump, max. 400 ms;	P_4.1.5
Charge Pump Output	V _{CP, max}	-0.3	-	V _S + 16	V		P_4.1.6
Wake Input WK/VSENSE	V _{WK, max}	-0.3	-	40	V	-	P_4.1.7
Fail Output FO/GPIO	V _{FO_TEST, max}	-0.3	-	V _S + 0.3	V	-	P_4.1.8
CANH, CANL	V _{BUS, max}	-27	-	40	V	-	P_4.1.9
Logic Input Pins (CSN, CLK, SDI, TXDCAN, TEST)	V _{I, max}	-0.3	-	V _{CC1} + 0.3	V	-	P_4.1.10
Logic Output Pins (SDO, RSTN, INTN, RXDCAN)	V _{O, max}	-0.3	-	V _{CC1} + 0.3	V	-	P_4.1.11
VCAN Input Voltage	V _{VCAN, max}	-0.3	-	5.5	V	-	P_4.1.12
I/O Supply Voltage	V _{VIO, max}	-0.3	-	5.5	V	Must be connected to VCC1	P_4.1.19
Maximum Differential CAN Bus Voltage	V _{CAN_Diff, max}	-5	-	10	V	-	P_4.1.20
Temperatures	*	+				•	
Junction Temperature	T _j	-40	-	150	°C	-	P_4.1.13
Storage Temperature	T _{stg}	-55	-	150	°C	-	P_4.1.14
ESD Susceptibility					· <u> </u>		
ESD Resistivity	V _{ESD,11}	-2	-	2	kV	HBM ³⁾	P_4.1.15
ESD Resistivity to GND, CANH, CANL	V _{ESD,12}	-8	-	8	kV	HBM ⁴⁾³⁾	P_4.1.16



Table 1Absolute Maximum Ratings¹⁾ (cont'd)

 T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol		Values		Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
ESD Resistivity to GND	V _{ESD,21}	-500	-	500	V	CDM ⁵⁾	P_4.1.17
ESD Resistivity Pin 1, 12,13,24 (corner pins) to GND	V _{ESD,22}	-750	-	750	V	CDM ⁵⁾	P_4.1.18

1) Not subject to production test, specified by design.

2) The VCC1 and digital I/O maximum rating can be 6.0 V for a limited time (up to 100h).

3) ESD susceptibility, HBM according to ANSI/ESDA/JEDEC JS-001 (1.5 kΩ, 100 pF)

4) Please see chapter "Application Information" For ESD "GUN" resistivity (according to IEC61000-4-2 "gun test" (150 pF, 330 Ω)).

5) ESD susceptibility, Charged Device Model "CDM" EIA/JESD22-C101 or ESDA STM5.3.1

Notes

1. Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

2. Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.



4.2 Functional Range

Table 2Functional Range1)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Supply Voltage	V _{S,func}	V _{POR}	-	28	V	²⁾ V _{POR} see section Chapter 12.9	P_4.2.1
CAN Supply Voltage	V _{CAN,func}	4.75	-	5.25	V	-	P_4.2.2
SPI Frequency	f _{spi}	-	-	4	MHz	see Chapter 13.7 for f _{SPI,max}	P_4.2.3
Junction Temperature	T _j	-40	-	150	°C	-	P_4.2.4

1) Not subject to production test, specified by design.

2) Including Power-On Reset, Over- and Undervoltage Protection

Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.

Device Behavior Outside of Specified Functional Range:

- 28V < V_{S,func} < 40V: Device is still functional (including the state machine); the specified electrical characteristics might not be ensured anymore. The regulators VCC1/2 are working properly, however, a thermal shutdown might occur due to high power dissipation. The specified SPI communication speed is ensured; the absolute maximum ratings are not violated, however the device is not intended for continuous operation of VS >28V. The device operation at high junction temperatures for long periods might reduce the operating life time;
- V_{CAN} < 4.75V: The undervoltage bit VCAN_UV is set in the SPI register BUS_STAT and the transmitter is disabled as long as the UV condition is present;
- 5.25V < V_{CAN} < 6.0V: CAN transceiver is still functional. However, the communication might fail due to outof-spec operation;
- V_{POR,f} < VS < 5.5V: Device is still functional; the specified electrical characteristics might not be ensured anymore:
 - The voltage regulators will enter the linear $(R_{DS On})$ operation mode ,
 - A VCC1_UV reset could be triggered depending on the Vrtx settings,
 - GPIO behavior depends on the respective configuration:
 - HS/LS switches remain switched On as long as the control voltage is sufficient.
 - An unwanted overcurrent shutdown may occur.
 - OC shutdown bit set and the respective HS/LS switch will turn Off;
 - FO output remains On if it was enabled before VS > 5.5V,
 - The specified SPI communication speed is ensured.



4.3 Thermal Resistance

Table 3 Thermal Resistance¹⁾

Parameter	Symbol	Values		Unit	Note or	Number	
		Min.	Тур.	Max.	-	Test Condition	
Junction to Soldering Point	R _{th(JSP)}	-	14	-	K/W	Exposed Pad	P_4.3.1
Junction to Ambient	R _{th(JA)}	-	35	-	K/W	2)	P_4.3.2

1) Not subject to production test, specified by design.

Specified R_{th(JA)} value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board for a power dissipation of 1.5W; the product (chip+package) was simulated on a 76.2x114.3x1.5mm³ with 2 inner copper layers (2 x 70µm Cu, 2 x 35µm C); where applicable a thermal via array under the exposed pad contacted the first inner copper layer and 300mm2 cooling areas on the top layer and bottom layers (70µm).



4.4 Current Consumption

Table 4Current Consumption

Current consumption values are specified at $T_j = 25$ °C, $V_s = 13.5$ V, all outputs open (unless otherwise specified)

Parameter	Symbol	rmbol Values		S	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
SBC Normal Mode		·		·			
Normal Mode current consumption	/ _{Normal}	-	3.5	6.5	mA	$V_{\rm S} = 5.5 \text{ V to } 28 \text{ V;}$ $T_{\rm j} = -40 \text{ °C to } +150 \text{ °C;}$ VCC2, CAN = Off	P_4.4.1
SBC Stop Mode							
Stop Mode current consumption	<i>I</i> _{Stop_1,25}	-	44	55	μΑ	¹⁾ VCC2 & CAN ²⁾ = Off, Cyclic Wake/Sense & Watchdog = Off; no load on VCC1; I_PEAK_TH = '0'	P_4.4.2
Stop Mode current consumption	/ _{Stop_1,85}	_	50	72	μΑ	¹⁾³⁾ $T_j = 85^{\circ}C;$ VCC2 & CAN ²⁾ = Off; Cyclic Wake/Sense & Watchdog = Off; no load on VCC1; I_PEAK_TH = '0'	P_4.4.3
Stop Mode current consumption (high active peak threshold)	<i>I</i> _{Stop_2,25}	-	65	72	μΑ	¹⁾ VCC2 & CAN ²⁾ = Off; Cyclic Wake/Sense & Watchdog = Off; no load on VCC1; I_PEAK_TH = '1'	P_4.4.4
Stop Mode current consumption (high active peak threshold)	/ _{Stop_2,85}	-	70	92	μΑ	¹⁾³⁾ <i>T</i> _j = 85°C; VCC2 & CAN ²⁾ = Off; Cyclic Wake/Sense & Watchdog = Off; no load on VCC1; I_PEAK_TH = '1'	P_4.4.5
SBC Sleep Mode							
Sleep Mode current consumption	I _{Sleep,25}	-	15	25	μΑ	VCC2 & CAN ²⁾ = Off; Cyclic Wake/Sense = Off	P_4.4.6
Sleep Mode current consumption	I _{Sleep,85}	-	25	35	μΑ	³⁾ $T_j = 85^{\circ}C;$ VCC2 & CAN ²⁾ = Off; Cyclic Wake/Sense = Off	P_4.4.7



Table 4Current Consumption (cont'd)

Current consumption values are specified at $T_i = 25^{\circ}$ C, $V_s = 13.5$ V, all outputs open (unless otherwise specified)

Parameter	Symbol		Values			Note or	Number
		Min.	Тур.	Max.		Test Condition	
Feature Incremental Current	Consumption	on	I	L.			
Current consumption for CAN module, recessive state	I _{CAN,rec}	_	2	3	mA	³⁾ SBC Normal/Stop Mode; CAN Normal Mode; VCC2 connected to VCAN; VTXDCAN = VCC2; no RL on CAN	P_4.4.8
Current consumption for CAN module, dominant state	I _{CAN,dom}	-	3	5	mA	³⁾ SBC Normal/Stop Mode; CAN Normal Mode; VCC1 connected to VCAN; VTXDCAN = GND; no RL on CAN	P_4.4.9
Current consumption for CAN module, Receive Only Mode	I _{CAN,RcvOnly}	-	0.9	1.2	mA	³⁾⁴⁾ SBC Normal/Stop Mode; CAN Receive Only Mode; VCC1 connected to VCAN; VTXDCAN = VCC1; no RL on CAN	P_4.4.10
Current consumption during CAN Partial Networking frame detect mode (RX_WK_SEL = '0')	I _{CAN,SWK,25}	-	360	470	μΑ	³⁾ <i>T</i> _j = 25°C; SBC Stop Mode; WK, VCC2 = Off; CAN SWK Wake Capable, SWK Receiver enabled, WUF detect; no RL on CAN;	P_4.4.11
Current consumption during CAN Partial Networking frame detect mode (RX_WK_ SEL = '0')	I _{CAN,SWK,85}	-	390	500	μΑ	³⁾ <i>T</i> _j = 85°C; SBC Stop Mode; WK, VCC2 = Off; CAN SWK Wake Capable, SWK Receiver enabled, WUF detect; no RL on CAN;	P_4.4.12
Current consumption for WK, GPIO wake capability (all wake inputs)	I _{Wake,WK,25}	-	0.2	2	μA	⁵⁾⁶⁾⁷⁾ SBC Sleep Mode; WK wake capable; no activity on WK pin; CAN = Off; VCC2 = Off	P_4.4.13



Table 4Current Consumption (cont'd)

Current consumption values are specified at $T_j = 25^{\circ}$ C, $V_s = 13.5$ V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Current consumption for WK, GPIO wake capability (all wake inputs)	I _{Wake,WK,85}	-	0.5	3	μΑ	$^{3)5)6)7)}$ SBC Sleep Mode; $T_j = 85^{\circ}$ C; WK wake capable; no activity on WK pin; CAN = Off; VCC2 = Off	P_4.4.14
Current consumption for CAN wake capability (tsilence expired)	I _{Wake,CAN,25}	-	4.5	6	μA	²⁾⁵⁾ SBC Sleep Mode; CAN Wake Capable; WK = Off; VCC2 = Off;	P_4.4.15
Current consumption for CAN wake capability (tsilence expired)	I _{Wake,CAN,85}	_	5.5	7	μΑ	²⁾³⁾⁵⁾ SBC Sleep Mode; <i>T</i> _j = 85°C; CAN Wake Capable; WK = Off; VCC2 = Off;	P_4.4.16
VCC2 Normal Mode current consumption	I _{Normal,VCC2}	-	2.5	3.5	mA	$V_{\rm S} = 5.5 \text{ V to } 28 \text{ V;}$ $T_{\rm j} = -40 \text{ °C to } +150 \text{ °C;}$ VCC2 = On (no load)	P_4.4.17
Current consumption for VCC2 in SBC Sleep Mode	I _{Sleep,VCC2,25}	-	25	35	μΑ	¹⁾⁵⁾ SBC Sleep Mode; VCC2 = On (no load); CAN, WK = Off	P_4.4.18
Current consumption for VCC2 in SBC Sleep Mode	I _{Sleep,VCC2,85}	_	30	40	μΑ	¹⁾³⁾⁵⁾ SBC Sleep Mode; $T_j = 85^{\circ}C$; VCC2 = On (no load); CAN, WK = Off	P_4.4.19
Current consumption for GPIO if configured as low- side / high-side in SBC Stop Mode	I _{Stop,GPIO,25}	-	400	550	μΑ	³⁾⁵⁾ SBC Stop Mode; GPIO configured as HS or LS with 100% duty cycle (no load); CAN, WK = Off	P_4.4.20
Current consumption for GPIO if configured as low- side / high-side in SBC Stop Mode	I _{Stop,GPIO,85}	-	450	600	μΑ	³⁾⁵⁾ SBC Stop Mode; <i>T</i> _j = 85°C; GPIO configured as HS or LS with 100% duty cycle (no load); CAN, WK = Off	P_4.4.21
Current consumption for Cyclic Sense function	I _{Stop,CS25}	-	20	26	μΑ	⁵⁾⁸⁾⁹⁾ SBC Stop Mode; WD = Off;	P_4.4.22
Current consumption for Cyclic Sense function	I _{Stop,CS85}	-	24	35	μΑ	³⁾⁵⁾⁸⁾⁹⁾ SBC Stop Mode; $T_j = 85^{\circ}C;$ WD = Off;	P_4.4.23



Table 4Current Consumption (cont'd)

Current consumption values are specified at $T_i = 25^{\circ}$ C, $V_s = 13.5$ V, all outputs open (unless otherwise specified)

Parameter	Symbol		Values			Note or	Number
		Min.	Тур.	Max.		Test Condition	
Current consumption for watchdog active in Stop Mode	I _{Stop,WD25}	-	20	26	μΑ	³⁾ SBC Stop Mode; Watchdog running;	P_4.4.24
Current consumption for watchdog active in Stop Mode	I _{Stop,WD85}	-	24	35	μA	³⁾ SBC Stop Mode; <i>T</i> _j = 85°C; Watchdog running;	P_4.4.25

If the load current on VCC1 exceeds the configured VCC1 active peak threshold I_{VCC1,Ipeak1,r} or I_{VCC1,Ipeak2,r}, the current consumption will increase by typ. 2.9mA to ensure optimum dynamic load behavior. Same applies to VCC2. See also Chapter 6, Chapter 7.

- 2) CAN not configured in selective wake mode.
- 3) Not subject to production test, specified by design.
- 4) Current consumption adder also applies for WUF detection (frame detect mode) when CAN Partial Networking is activated.
- 5) Current consumption adders of the features defined for SBC Stop Mode also apply for SBC Sleep Mode and vice versa. The wake input signals are stable (i.e. not toggling), Cyclic Wake/Sense & watchdog are Off (unless otherwise specified).
- 6) No pull-up or pull-down configuration selected.
- 7) The specified WK current consumption adder for wake capability applies regardless of how many WK inputs are activated, i.e GPIO configured as wake input.
- 8) GPIO configured as HS used for Cyclic Sense, Timer with 20ms period, 0.1ms on-time, no load on GPIO.

In general the current consumption adder for Cyclic Sense in SBC Stop Mode can be calculated with below equation (no load on FO/GPIO):

IStop,CS_typ = 18μ A + ($I_{stop,GPI0,25}$ × ton/TPer) where 18uA is the base current consumption of the digital Cyclic Sense / wake-up functionality;

9) Also applies to Cyclic Wake but without the contribution of the HS biasing

Notes

- 1. There is no additional current consumption in SBC Normal Mode due to PWM generators or Timers.
- To ensure the device functionality down to V_{por,f} the quiescent current will increase gradually by ~35 uA for V_s
 9 V in SBC Stop Mode and Sleep Mode..



5 System Features

This chapter describes the system features and behavior of the TLE9461-3ES V33:

- State machine
- Device configuration
- SBC mode control
- State of supplies and peripherals
- System functions such as Cyclic Sense or Cyclic Wake
- Charge pump output for reverse polarity protection and Kl. 30 load switching
- High-voltage measurement interface

The System Basis Chip (SBC) offers six operating modes:

- SBC Init Mode: Power-up of the device (initial and after a soft reset),
- SBC Normal Mode: The main operating mode of the device,
- SBC Stop Mode: The first-level power saving mode (the main voltage regulator VCC1 remains enabled),
- SBC Sleep Mode: The second-level power saving mode (VCC1 is disabled),
- SBC Restart Mode: An intermediate mode after a wake-up event from SBC Sleep or Fail-Safe Mode or after a failure (e.g. WD failure, VCC1 under voltage reset) to bring the microcontroller into a defined state via a reset. Once the failure condition is not present anymore the device will automatically change to SBC Normal Mode after a delay time (t_{RD1} or t_{RD2}).
- SBC Fail-Safe Mode: A safe-state mode after critical failures (e.g. WD failure, VCC1 under voltage reset) to bring the system into a safe state and to ensure a proper restart of the system later on. VCC1 is disabled. It is a permanent state until either a wake-up event (via CAN, WK/VSENSE or GPIO configured as wake-up) occurs or the over temperature condition is not present anymore.

A special mode, called SBC Development Mode, is available during software development or debugging of the system. All above mentioned operating modes can be accessed in this mode. However, the watchdog counter is stopped and does not need to be triggered. In addition, CAN is set to normal mode and VCC2 is On. This mode can be accessed by connecting the TEST pin to VCC1 during SBC Init Mode.

The device can be configured via hardware to determine the device behavior after a watchdog trigger failure. See **Chapter 5.1.1** for further information.


The System Basis Chip is controlled via a 16-bit SPI interface. A detailed description can be found in **Chapter 13**. The device configuration as well as the diagnosis is handled via the SPI. The SPI mapping of the TLE9461-3ES V33 is compatible to other devices of the TLE926x and TLE927x families.

The device offers various supervision features to support functional safety requirements. Please see **Chapter 12** for more information.



5.1 Block Description of State Machine

The different SBC operating modes are selected via SPI by setting the respective SBC **MODE** bits in the register **M_S_CTRL**. The SBC **MODE** bits are cleared when going through SBC Restart Mode and thus always show the current SBC mode.

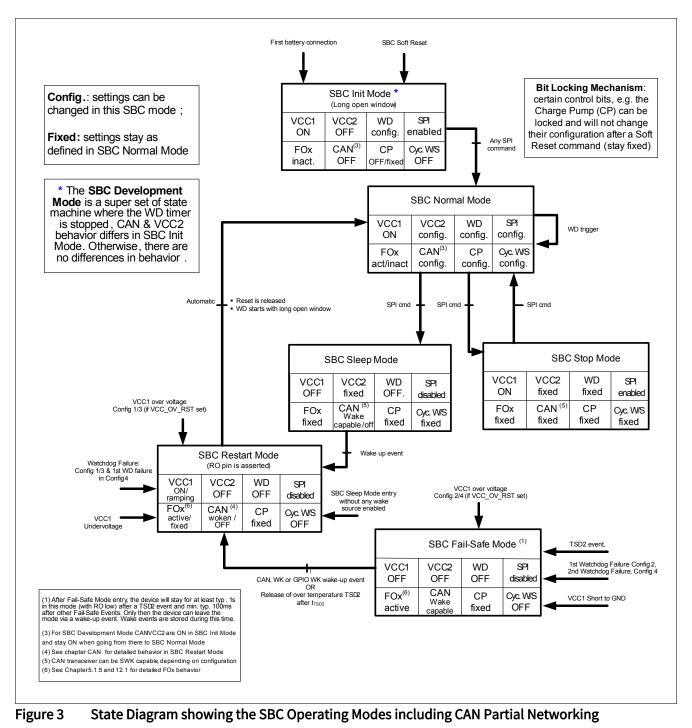



5.1.1 Device Configuration and SBC Init Mode

The device starts up in SBC Init Mode after crossing the power-on reset threshold $V_{POR,r}$ (see also Chapter 12.3) and the watchdog starts with a long open window (t_{LW}) after RSTN is released (High level). During this power-on phase the following configurations are stored in the device:

- The device behavior regarding a watchdog trigger failure and a VCC1 over voltage condition is determined by the external circuit on the INTN pin (typ. 47 kΩ pull-up resistor to VCC1, see also below)
- The selection of the normal user mode operation or the SBC Development Mode (watchdog = Off, CAN = On, VCC2 = On for debugging purposes) is set depending on the voltage level of the TEST pin (see also Chapter 5.1.7).

5.1.1.1 Device Configuration

The configuration selection selects the SBC behavior due to a watchdog trigger failure and VCC1 overvoltage detection. Depending on the requirements of the application, two different configurations can be chosen: - If the VCC1 output shall be switched Off and the device shall go to SBC Fail-Safe Mode in case of a watchdog failure (1 or 2 fails). To set this configuration (Config 2/4), the INTN pin does not need an external pull-up resistor.

- If VCC1 should not be switched Off (Config 1/3), the INTN pin needs to have an external pull-up resistor connected to VCC1 (see application diagram in **Chapter 14**).

Figure 4 shows the timing diagram of the hardware configuration selection. The hardware configuration is defined during SBC Init Mode. The INTN pin is internally pulled Low with a weak pull-down resistor during the reset delay time t_{RD1} , i.e. after VCC1 crosses the reset threshold VRT1 and before the RSTN pin goes High. The INTN pin is monitored during this time (with a continuous filter time of t_{CFG_F}) and the configuration (depending on the voltage level at INTN) is stored at the rising edge of RSTN.

- Note: If the POR bit is not cleared, then the internal pull-down resistor at INTN is reactivated every time RSTN is pulled Low the configuration is updated at the rising edge of RSTN. Therefore it is recommended to clear the POR bit right after initialization. In case there is no stable signal at INTN, then the last filtered value is taken. If no filtered value is taken then the default value '0' is taken as the config select value (= SBC Fail-Safe Mode).
- *Note:* During device power up, the SPI status bits VCC1_ WARN, VCC1_UV and VS_UV are updated only if RSTN is released after the reset delay time.

TLE9461-3ES V33 Lite CAN SBC Family



System Features

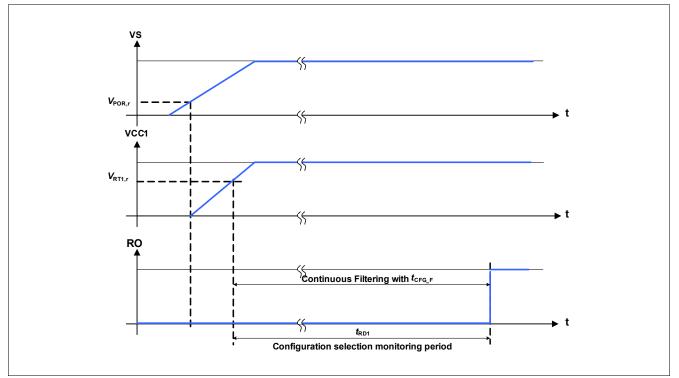


Figure 4 Hardware Configuration Selection Timing Diagram

There are four different device configurations (Table 5) available defining the watchdog failure and the VCC1 over voltage behavior. The configurations can be selected via the external connection on the INTN pin and the SPI bit CFG1 in the HW_CTRL_0 register (see also Chapter 13.4):

- **CFG0_STATE** = '1': Config 1 and Config 3:
 - A watchdog trigger failure leads to SBC Restart Mode and depending on CFG1 the Fail Output (FO) is activated after the 1st (Config 1) or 2nd (Config 3) watchdog trigger failure;
 - A VCC1 over voltage detection leads to SBC Restart Mode if VCC1_OV_RST is set.
 VCC1_OV is set and the Fail Output is activated;
- CFG0_STATE = '0': Config 2 and Config 4:
 - A watchdog trigger failure leads to SBC Fail-Safe Mode and depending on CFG1 the Fail Output (FO) is activated after the 1st (Config 2) or 2nd (Config 4) watchdog trigger failure. The first watchdog trigger failure in Config 4 leads to SBC Restart Mode;
 - A VCC1 over voltage detection leads to SBC Fail-Safe Mode if VCC1_OV_RST is set.
 VCC1_OV is set and the Fail Output is activated;

The respective device configuration can be identified by reading the SPI bit CFG1 in the HW_CTRL_0 register and the CFG0_STATE bit in the WK_LVL_STAT register.

 Table 5 shows the configurations and the device behavior in case of a watchdog trigger failure:



		880 · · · · · · · · · · ·											
Config	INTN Pin (CFG0_STATE)	SPI Bit CFG1	Event	FO Activation	SBC Mode Entry								
1	External pull-up	1	1 x Watchdog Failure	after 1st WD Failure	SBC Restart Mode								
2	No ext. pull-up	1	1 x Watchdog Failure	after 1st WD Failure	SBC Fail-Safe Mode								
3	External pull-up	0	1 & 2 x Watchdog Failure	after 2nd WD Failure	SBC Restart Mode								
4	No ext. pull-up	0	2 x Watchdog Failure	after 2nd WD Failure	SBC Fail-Safe Mode ¹⁾								

Table 5Watchdog Trigger Failure Configuration

1) SBC Restart Mode is entered after the 1. watchdog failure. The 2nd watchdog failure leads to SBC Fail-Safe Mode

Table 6 shows the configurations and the device behavior in case of a VCC1 over voltage detection when VCC1_OV_RST is set:

Config	INTN Pin (CFG0_STATE)	CFG1 Bit	VCC1_O V_RST	Event	VCC1_ OV	FO Activation	SBC Mode Entry
1-4	any value	х	0	1 x VCC1 OV	1	no FO activation	unchanged
1	External pull- up	1	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Restart Mode
2	No ext. pull-up	1	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Fail-Safe Mode
3	External pull- up	0	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Restart Mode
4	No ext. pull-up	0	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Fail-Safe Mode

Table 6Device Behavior in Case of VCC1 Over Voltage Detection

The respective configuration is stored for all conditions and can only be changed in SBC Init Mode, when RSTN is 'Low' or by powering down the device (VS < $V_{POR,f}$) assuming the bit POR is cleared right after the device power up (see also not on Page 21).



5.1.1.2 SBC Init Mode

In SBC Init Mode, the device waits for the microcontroller to finish its startup and initialization sequence.

The SBC starts with a long open watchdog window (see also Chapter 12.2).

All diagnosis functions which are enabled by default at device power-up are active.

While in SBC Init Mode any valid SPI command (from the SPI protocol, i.e. 16-bit or 32-bit word) sets the device to SBC Normal Mode, i.e. any register can be written, cleared and read. During the long open window the watchdog has to be triggered (i.e. thereby the watchdog is automatically configured).

A missing watchdog trigger during the long open window will cause a watchdog failure and the device will enter SBC Restart Mode.

Wake-up events are ignored during SBC Init Mode.

A SBC Soft Reset command (MODE = '11') sets the SBC back into SBC Init Mode and the SPI registers are changed to their respective Soft Reset values. In case one or both lock bits are set (CFG_LOCK_0 or CFG_LOCK_1) the locked bits keep their previous values and stay unchanged.

Note:	Any SPI command sets the SBC to SBC Normal Mode even if it is an illegal SPI command (see Chapter 13.2).
Note:	For a safe start-up, it is recommended to use the first SPI command to trigger and to configure the watchdog (see Chapter 12.2).
Note:	At power up, the SPI bit VCC1_UV is not set nor is the FO triggered as long as VCC1 is below the $V_{RT,x}$ threshold and VS is below the $V_{S,UV}$ threshold. The RSTN pin is kept Low as long as VCC1 is below the selected $V_{RT,x}$ threshold and the reset delay time is not expired. After the first threshold crossing (VCC1 > Vrt1,r) and the RSTN transition from Low to High, all subsequent undervoltage events lead to SBC Restart Mode.
Note:	The bit VS_UV is updated only in SBC INIT Mode once RSTN resumes a high level.



5.1.2 SBC Normal Mode

The SBC Normal Mode is the standard operating mode for the SBC. All remaining configurations must be done in SBC Normal Mode before entering a low-power mode (see also **Chapter 5.1.6**). A wake-up event on CAN, WK/VSENSE, FO/GPIO configured as wake input, the Timer will create an interrupt on pin INTN - however, no change of the SBC mode will occur. The configuration options are listed below:

- VCC1 is always active
- VCC2 can be switched On or Off (default = Off)
- CAN is configurable (it is Off coming from SBC Init Mode; Off or Wake Capable coming from SBC Restart Mode, see also **Chapter 5.1.5**)
- WK/VSENSE pin shows the input level and can be selected to be wake capable (interrupt), the alternative measurement function with the voltage output at FO/GPIO can be activated by setting WK_MEAS
- Cyclic Sense can be configured with the HS function of the GPIO (GPIO = '011'), WK/VSENSE input and Timer
- Cyclic Wake can be configured using the timer
- Watchdog period is configurable
- The Charge Pump Output can be switched On or Off (default = Off)
- The FO/GPIO output is inactive by default. Coming from SBC Restart Mode and configured as FO it can be active (due to a failure event, e.g. watchdog trigger failure, VCC1 short circuit, etc.) or inactive (no failure occurred)
- GPIO is configurable and is controlled by PWM; GPIO is Off coming from SBC Restart Mode

Certain SPI control bits with the bit type 'rwl' can be protected against unintentional modification by setting the CFG_LOCK_1 bit in the register HW_CTRL_2. The locking mechanism stays activated until the device is powered down (VS < $V_{POR,f}$). The charge pump and GPIO configuration can also be locked by setting the CFG_LOCK_0 bit in the register HW_CTRL_1. The lock can be reset in SBC Normal Mode.

In SBC Normal Mode, the FO output can be tested within the system (i.e. to verify whether setting the FO/GPIO pin to Low creates the intended behavior). The FO output can be enabled and then disabled again by the microcontroller setting or resetting the FO_ON SPI bit. This feature is only intended for testing purposes.



5.1.3 SBC Stop Mode

The SBC Stop Mode is the first level technique to reduce the overall current consumption by setting the voltage regulators VCC1, VCC2 into a low-power mode. In this mode VCC1 is still active, supplying the microcontroller, which can enter a power-down mode. The VCC2 supply can be configured to stay enabled and CAN to stay in Normal Mode. All settings have to be done before entering SBC Stop Mode. In SBC Stop Mode all SPI WRITE commands are ignored and the SPI_FAIL bit is set. Exceptions are changing to SBC Normal Mode, triggering a SBC Soft Reset, refreshing the watchdog as well as reading and clearing the SPI status registers. A wake-up event on CAN, WK/VSENSE, FO/GPIO (if configured as wake input) and Timer create an interrupt on pin INTN - however, the SBC mode remains unchanged. The configuration options are listed below:

- VCC1 is always On
- VCC2 is fixed as configured in SBC Normal Mode
- CAN mode is fixed as configured in SBC Normal Mode
- WK/VSENSE pin is fixed as configured in SBC Normal Mode
- Cyclic Sense is fixed as configured in SBC Normal Mode
- Cyclic Wake is fixed as configured in SBC Normal Mode
- Watchdog is fixed as configured in SBC Normal Mode
- SBC Soft Reset can be triggered
- The Charge Pump state is fixed as configured in SBC Normal Mode
- FO output works as configured in SBC Normal Mode unless it is changed by the software (i.e. by clearing the FAILURE bit and triggering the watchdog properly)
- GPIO is fixed as configured in SBC Normal Mode

If not all wake source signalization flags from WK_STAT_0 and WK_STAT_1 are cleared before entering SBC Stop Mode, then an interrupt is triggered on the pin INTN.

Note:	If outputs are kept enabled during SBC Stop Mode, e.g. HS of GPIO, then the SBC current consumption increases respectively (see Chapter 4.4).
Note:	It is not possible to switch directly from SBC Stop Mode to SBC Sleep Mode. Doing so sets the SPI_FAIL flag and SBC into Restart Mode is entered.
Note:	When WK/VSENSE and FO/GPIO are configured for the alternate measurement function (WK_MEAS = 1) the pins cannot be selected as wake input sources.



5.1.4 SBC Sleep Mode

The SBC Sleep Mode is the second level technique to reduce the overall current consumption to a minimum needed to react on wake-up events or for the SBC to perform autonomous actions (e.g. Cyclic Sense). In this mode, VCC1 is Off, not supplying the microcontroller anymore. The VCC2 supply can be configured to stay enabled. The settings have to be done before entering SBC Sleep Mode. A wake-up event on CAN, WK/VSENSE, FO/GPIO (if configured as wake input) and the internal Timer brings the device via the SBC Restart Mode subsequently to SBC Normal Mode again and signals the wake source.

The configuration options are listed below:

- VCC1 is always Off
- VCC2 is fixed as configured in SBC Normal Mode
- CAN mode changes automatically from On or Receive Only Mode to Wake Capable mode or can be selected to be Off
- WK/VSENSE pin is fixed as configured in SBC Normal Mode
- Cyclic Sense is fixed as configured in SBC Normal Mode
- Cyclic Wake is fixed as configured in SBC Normal Mode, it can be the only activated wake source
- Watchdog is Off
- The Charge Pump state is fixed as configured in SBC Normal Mode
- FO output is fixed as configured in SBC Normal Mode is maintained
- GPIO is fixed as configured in SBC Normal Mode, it can be the only wake source if configured as WK/VSENSE
- RSTN is pulled low
- SPI communication and all digital I/Os are disabled because VCC1 is Off
- The Sleep Mode entry is signalled in the SPI register **DEV_STAT** with the bit **DEV_STAT**

It is not possible to switch Off all wake sources in SBC Sleep Mode. Doing so sets the SPI_FAIL flag and the device enters SBC Restart Mode.

In order to enter SBC Sleep Mode successfully, all wake source signalization flags from WK_STAT_0 and WK_STAT_1 need to be cleared. A failure to do so results in an immediate wake-up from SBC Sleep Mode by going via SBC Restart to Normal Mode.

All settings must be done before entering SBC Sleep Mode.

- *Note:* If outputs are kept enabled during SBC Sleep Mode, e.g. HS of GPIO, then the SBC current consumption increases respectively (see Chapter 4.4).
- Note: The Cyclic Sense function might not work properly anymore in case of a failure event (e.g. overcurrent, over temperature, reset) because the configured HS of the GPIO and Timer might be disabled.
- Note: When WK/VSENSE and FO/GPIO are configured for the alternate measurement function (WK_MEAS = 1) then the pins cannot be selected as wake input sources.



5.1.5 SBC Restart Mode

There are multiple reasons to enter the SBC Restart Mode. The main purpose of the SBC Restart Mode is to reset the microcontroller:

- in case of under voltage at VCC1 in SBC Normal and SBC Stop Mode and SBC Init Mode after RSTN has been released,
- in case of over voltage at VCC1 (if the bit VCC1_OV_RST is set and if CFG0_STATE = '1'),
- due to 1st incorrect Watchdog triggering (only if Config1, Config3 or Config 4 is selected, otherwise SBC Fail-Safe Mode is immediately entered),
- In case of a wake event from SBC Sleep or Fail-Safe Mode or a release of over temperature shutdown (TSD2) out of SBC Fail-Safe Mode (this transition is used to ramp up VCC1 in a defined way).

From SBC Restart Mode, the device enters automatically to SBC Normal Mode. The SBC **MODE** bits are cleared. As shown in **Figure 37** the Reset Output (RSTN) is pulled Low when entering Restart Mode and is released (going High) at the transition to SBC Normal Mode after the reset delay time (t_{RD1}). The watchdog timer starts with a long open window starting from the moment of the rising edge of RSTN. The watchdog period settings in the register WD_CTRL are changed to the respective default value '100'.

Leaving the SBC Restart Mode does not result in changing / deactivating the Fail Output.

The behavior of the blocks is listed below:

- FO (if configured as FO) is activated in case of a 1st watchdog trigger failure (Config1) or a 2nd watchdog failure (Config3) or in case of VCC1 over voltage detection (if VCC1_OV_RST is set)
- VCC1 stays On or is ramping up (coming from SBC Sleep or Fail-Safe Mode)
- VCC2 is disabled if it was activated before
- CAN is "woken" due to a wake-up event or Off depending on the previous SBC and transceiver mode (see also Chapter 8). It is Wake Capable when it was in CAN Normal-, Receive Only or Wake Capable mode before SBC Restart Mode
- GPIO behavior: switched Off if configured as LS- or HS-switch, see also Chapter 11.1.2
- RSTN is internally pulled Low during SBC Restart Mode
- SPI communication is ignored by the SBC, i.e. it is not interpreted
- The SBC Restart Mode entry is signalled in the SPI register **DEV_STAT** with the bits **DEV_STAT**

Prev. SBC Mode	Event	DEV_STAT	WD_FAIL	VCC1_UV	VCC1_OV	VCC1_SC
Normal	1x Watchdog Failure	01	01	х	х	х
Normal	2x Watchdog Failure	01	10	х	х	х
Normal	VCC1 under voltage reset	01	хх	1	х	х
Normal	VCC1 over voltage reset	01	хх	х	1	х
Stop	1x Watchdog Failure	01	01	х	х	х
Stop	2x Watchdog Failure	01	10	х	х	х
Stop	VCC1 under voltage reset	01	хх	1	х	х
Stop	VCC1 over voltage reset	01	xx	х	1	х
Sleep	Wake-up event	10	хх	х	х	х
Fail-Safe	Wake-up event 01 see "Reasons for Fail Safe, Table 8"					

Table 7Reasons for Restart - State of SPI Status Bits (after Return to SBC Normal Mode)

TLE9461-3ES V33 Lite CAN SBC Family



System Features

Note: An over voltage event at VCC1 leads to SBC Restart Mode only if the bit VCC1_OV_RST is set and if CFG0_STATE = '1' (Config 1/3).

Note: The content of the WD_FAIL bits depends on the device configuration, e.g. 1 or 2 watchdog failures.

5.1.6 SBC Fail-Safe Mode

The purpose of this mode is to bring the system in a safe status after a failure condition by turning Off the VCC1 supply and powering Off the microcontroller. After a wake-up event the system restarts again.

The Fail-Safe Mode is automatically entered after following events:

- SBC thermal shutdown (TSD2) (see also Chapter 12.8.3),
- over voltage on VCC1 if the bit VCC1_OV_RST is set and if CFG0_STATE = '0',
- 1st incorrect watchdog trigger in Config2 (CFG1 = 1) and after a 2nd incorrect watchdog trigger in Config4 (CFG1 = 0) (see also Chapter 5.1.1),
- VCC1 is shorted to GND (see also Chapter 12.6),

In this case, the default wake sources CAN, WK/VSENSE and FO/GPIO (if configured as wake input - see also registers **BUS_CTRL_0**, **WK_CTRL_1** and **GPIO_CTRL**) are activated, the previous wake-up events are cleared in the register **WK_STAT_0** and **WK_STAT_1**, and both voltage regulators and the GPIO - if configured as HS or LS - are switched Off.

The SBC Fail-Safe Mode is entered regardless of the FO/GPIO pin configuration. If WK/VSENSE and FO/GPIO are configured for the alternate measurement function (WK_MEAS = 1) then these pins keep their configuration for the measurement function when SBC Fail-Safe Mode is entered, i.e. they are not automatically activated as wake sources.

The SBC Fail-Safe Mode is maintained until a wake-up event on the default wake sources occurs. To avoid any fast toggling behavior a filter time of typ. 100ms ($t_{FS,min}$) is implemented. Wake-up events during this time is stored and automatically lead to SBC Restart Mode after the filter time.

In case of a VCC1 over temperature shutdown (TSD2), the SBC Restart Mode is entered automatically after a filter time of typ. 1s (t_{TSD2}) (without the need of a wake-up event) once the device temperature has fallen below the TSD2 threshold. Please see **Chapter 12.8.3** on how to extend the minimum TSD2 waiting time. Leaving the SBC Fail-Safe Mode does not result in a deactivation of the Fail Output pins.

The following functions are controlled by the C Fail-Safe Mode:

- FO output (if configured as FO) is activated (see also Chapter 11)
- VCC1 is switched Off
- VCC2 is switched Off
- CAN is set to Wake Capable
- GPIO behavior:
 - if configured as HS or LS: it is switched Off
 - if configured as wake input: it is set to wake capable in Static Sense mode
- WK/VSENSE pin is set to wake capable in Static Sense mode (only if WK_MEAS = 0)
- Cyclic Sense and Cyclic Wake is disabled
- SPI communication is disabled because VCC1 is Off, RSTN and digital I/O pins are pulled Low
- The Fail-Safe Mode activation is signalled in the SPI register DEV_STAT with the bits FAILURE and DEV_STAT



Prev. SBC Mode	Failure Event	DEV_ STAT	TSD2	WD_ FAIL	VCC1_ UV	VCC1_ OV	VCC1_ SC
Normal	1 x Watchdog Failure	01	х	01	х	x	x
Normal	2 x Watchdog Failure	01	х	10	х	х	х
Normal	TSD2	01	1	хх	х	x	x
Normal	VCC1 short to GND	01	х	хх	1	х	1
Normal	VCC1 over voltage	01	х	хх	х	1	х
Stop	1 x Watchdog Failure	01	х	01	х	х	x
Stop	2 x Watchdog Failure	01	х	10	х	х	х
Stop	TSD2	01	1	хх	х	х	x
Stop	VCC1 short to GND	01	х	хх	1	х	1
Stop	VCC1 over voltage	01	x	хх	х	1	x

Table 8Reasons for Fail-Safe - State of SPI Status Bits after Return to Normal Mode

Note: An over voltage event on VCC1 leads to SBC Fail-Safe Mode only if the bit VCC1_OV_RST is set and if CFG0_STATE = '0' (Config 2/4).

Note: The content of the WD_FAIL bits depends on the device configuration, e.g. 1 or 2 watchdog failures.

5.1.7 SBC Development Mode

The SBC Development Mode is used during the development phase of the module. It is especially useful for software development.

Compared to the default SBC user mode operation, this mode is a super set of the state machine. The device starts also in SBC Init Mode and it is possible to use all the SBC Modes and functions with the following differences:

- Watchdog is stopped and does not need to be triggered. Therefore no reset is triggered due to watchdog failure
- SBC Fail-Safe and SBC Restart Mode are not activated by a watchdog trigger failure (but the other reasons to enter these modes are still valid)
- CAN and VCC2 default values in SBC Init Mode and if entering SBC Normal Mode from SBC Init Mode is On (instead of Off)

The SBC Development Mode is entered automatically, if the TEST pin is set High (i.e. connected to VCC1 with (3.3V level) during SBC Init Mode. The voltage level monitoring is started as soon as VS > V_{POR,r} and VCC1 > V_{RT1,r}. The SBC Development Mode is set and maintained, if SBC Init Mode is left by sending any SPI command while TEST is High. The bit SBC_DEV_LVL shows the status of the SBC Development Mode.

The Test pin has an integrated pull-down resistor, R_{TEST} (switched On only during SBC Init Mode), to prevent an unintentional SBC Development Mode entry (see also Figure 5).

Note: The integrated pull-down resistor is disabled only, if the SBC Development Mode has been entered successfully, i.e. not when the SBC Init Mode is left with an error (watchdog failure, VCC1 undervoltage reset, etc). During normal user mode, the integrated pull-down resistor is always activated. In this case the TEST pin can be left open or connect to GND

TLE9461-3ES V33 Lite CAN SBC Family



System Features

Note: In case a VCC2 overtemperature event occurs in SBC Init Mode., after SBC Development Mode is entered, VCC2 is shut down.

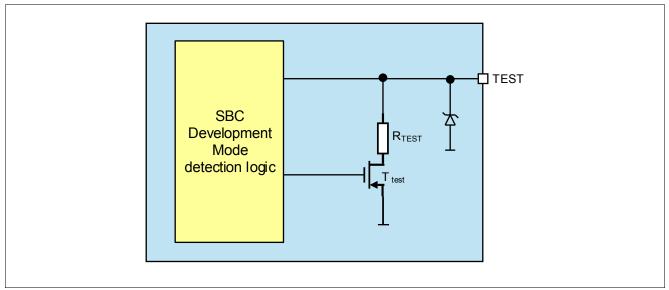


Figure 5 Block Diagram of Pin TEST for SBC Development Mode Detection

In case the pin level toggles with a period faster than t_{TEST} during the monitoring period the SBC Development Mode is not reached .

The SBC remains in this mode for all operating conditions and can only be left by powering down the device $(VS < V_{POR,f})$.

- *Note:* If the SBC enters SBC Fail-Safe Mode due to VCC1 shorted to GND during the SBC Init Mode, the SBC Development is not entered and can only be activated at the next power-up of the SBC (after the VCC1 short circuit is removed).
- *Note:* The absolute maximum ratings of the pin TEST must be observed. To increase the robustness of this pin during debugging or programming a series resistor between TEST and the connector can be added (see Figure 53).

infineon

System Features

5.1.8 Electrical Characteristics for Pin TEST

Table 9Electrical Characteristics1)

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Pull-down Resistance at pin TEST	R _{TEST}	7	10	13	kΩ	$^{2)}V_{\text{TEST}} = V_{\text{CC1}};$ SBC Init Mode;	P_5.1.1
TEST Input Filter Time	t _{TEST}	51	64	80	μs	3)	P_5.1.2
TEST High Input Voltage Threshold	V _{test,ih}	-	-	0.7 × V _{CC1}	V	2)	P_5.1.3
TEST Low Input Voltage Threshold	V _{ITEST,IL}	0.3× V _{CC1}	-	-	V	2)	P_5.1.4
TEST Hysteresis of Input Voltage	V _{TEST,IHY}	0.08 × V _{CC1}	0.12 × V _{CC1}	0.4 × V _{CC1}	V	2)	P_5.1.5

1) The external capacitance on the TEST pin must be limited to less than 10nF to ensure proper detection of SBC Development Mode and SBC User Mode operation.

2) Not subject to production test, specified by design.

3) Not subject to production test, tolerance defined by internal oscillator tolerance.



5.2 Wake Features

The following wake sources are implemented in the device:

- Static Sense: WK/VSENSE input and/or GPIO WK input are permanently active as a wake source, i.e WK_EN is set and/or FO/GPIO is enabled as wake input (see Chapter 9.2.2 & Chapter 11.1.3)
- Cyclic Sense: WK/VSENSE input only active during On-time of Cyclic Sense period. Internal timer is activating GPIO HS during On-time for sensing the WK/VSENSE input (see **Chapter 5.2.1**)
- Cyclic Wake: wake-up is controlled by internal timer, wake inputs are not used for Cyclic Wake (see Chapter 5.2.2)
- CAN wake: Wake-up via CAN message, i.e. CAN wake-up pattern (WUP, see also **Chapter 8**) or CAN wake-up frame (WUF, see also **Chapter 5.6**)

5.2.1 Cyclic Sense

The Cyclic Sense feature is intended to reduce the quiescent current of the device and the application. In the Cyclic Sense configuration, the GPIO (configured as high-side driver) is switched On periodically, controlled by **TIMER_CTRL**. The high-side switch supplies external circuitries e.g. switches and/or resistor arrays, which are connected to the wake input WK (see **Figure 6**). Any edge change of the WK/VSENSE input signal during the On-time of the Cyclic Sense period causes a wake-up. Depending on the SBC mode, either the INTN is pulled Low (SBC Normal Mode and Stop Mode) or the SBC is woken enabling the VCC1 (after SBC Sleep Mode).

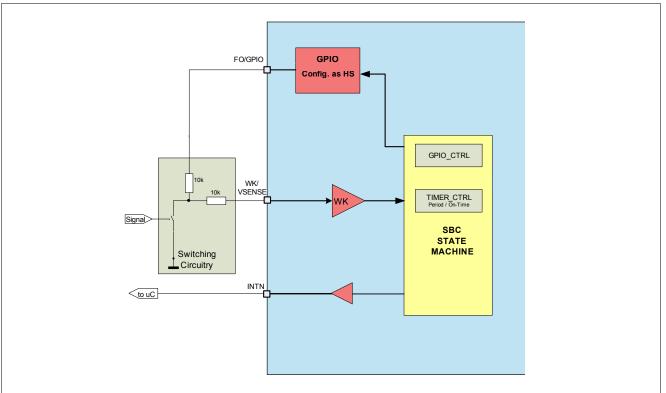


Figure 6 Cyclic Sense Working Principle



5.2.1.1 Configuration and Operation of Cyclic Sense

The correct sequence to configure the Cyclic Sense is shown in **Figure 7**. All the configurations have to be performed before the On-time is set in the TIMER_CTRL registers.

Cyclic Sense (=Timer) starts as soon as the respective On-time has been selected independently from the assignment of the HS and the filter configuration.

The correct configuration sequence is as follows:

- Configuring GPIO as HS with Cyclic Sense functionality
- Enabling WK/VSENSE as wake source
- Selecting the pull-up/down configuration, all configurations are valid for Cyclic Sense, recommended is the automatic pull-up / down selection
- Configuring the timer period and On-time

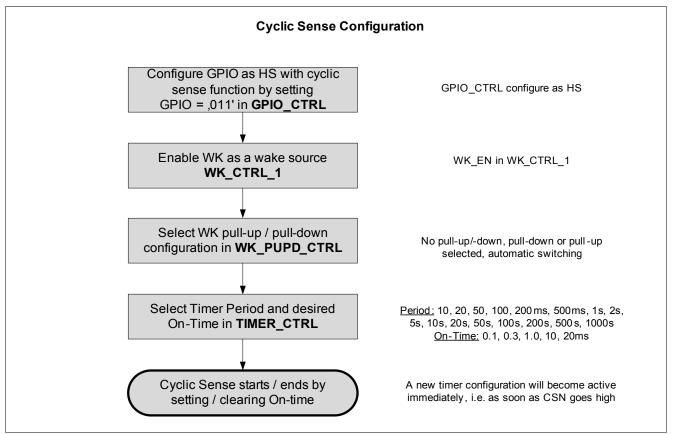


Figure 7 Cyclic Sense: Configuration and Sequence

- Note: If the sequence is not ensured the Cyclic Sense function might not work properly, e.g. an interrupt could be missed or an unintentional interrupt could be triggered. However, if Cyclic Sense is the only wake source and configured properly (e.g. Timer not yet set), then SBC Restart Mode is entered immediately because no valid wake source was set.
- Note: All configurations of period and On-time can be selected. However, recommended On-times for Cyclic Sense are 0.1ms, 0.3ms and 1ms for quiescent current saving reasons. The SPI_FAIL is set if the On-time is longer than the period.
- Note: A learning cycle is started every time when the timer is started via the On-time and GPIO is configured as HS with Cyclic Sense = '011 (i.e. the Cyclic Sense function is enabled).

TLE9461-3ES V33 Lite CAN SBC Family



System Features

The first sample of the WK/VSENSE input value (High or Low) is used as the reference for the next cycle. If a change of the WK/VSENSE input level is detected during the On-time of the second or later cycle then a wakeup from SBC Sleep Mode or an interrupt during SBC Normal or SBC Stop Mode is triggered.

A filter time of 16µs is implemented to avoid a parasitic wake-up due to transients or EMI disturbances. The filter time t_{FWK1} is triggered right at the end of the selected On-time and a wake signal is recognized if:


- there was an input level change (crossing the switching threshold level V_{WKth}) between the current and previous cycle and
- the input level did not change during the filter time

A wake-up event due to Cyclic Sense also sets the bit WK_WU.

During Cyclic Sense, WK_LVL_STAT is updated only with the sampled voltage levels of the WK/VSENSE pin in SBC Normal or SBC Stop Mode.

Note: In SBC Stop Mode the respective bits *WK_WU* and *WK_LVL* are only updated if the timer On-time is configured for *TIMER_ON* = '001'.

The functionality of the sampling and different scenarios are depicted in **Figure 8** to **Figure 10**. The behavior in SBC Stop and SBC Sleep Mode is identical except that in SBC Normal and Stop Mode INTN is triggered to signal a change of WK/VSENSE input level and in SBC Sleep Mode, VCC1 will power-up instead. A wake-up event is triggered regardless if the bit WK_WU is already set.

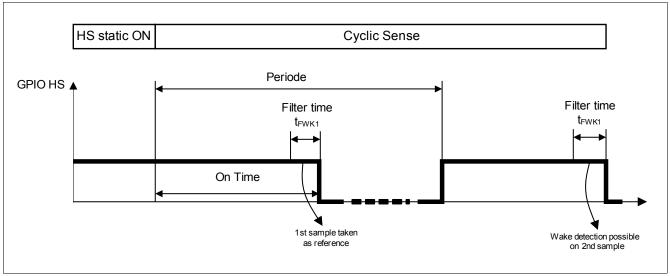







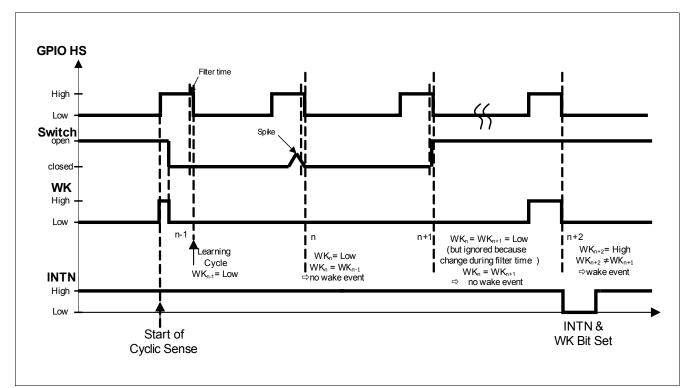


Figure 9 Cyclic Sense Example Timing for SBC Stop Mode, HS starts Low, GND based WK/VSENSE input



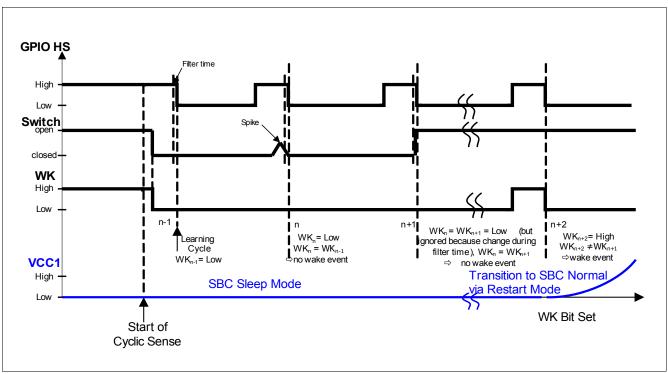



System Features

The Cyclic Sense function is disabled at the following conditions (WK/VSENSE is automatically switched to Static Sense):

- in case SBC Fail-Safe Mode is entered: The HS GPIO switch is disabled and the wake pin is changed to static sensing. An unintended wake-up event could be triggered when the WK/VSENSE input is changed to static sensing.
- In SBC Normal, Stop, or Sleep Mode in case of an overcurrent or overtemperature (TSD2) event: the HS GPIO switch is disabled
- Note: The internal timer for Cyclic Sense is not cleared automatically in case the HS switch is turned Off due to above mentioned failures. The timer is only cleared during SBC Restart Mode. This must be considered to avoid a loss of wake-up events, especially before entering SBC Sleep Mode, i.e. the software must ensure that at least another wake source is active or re-enable the GPIO HS again.

5.2.1.2 Cyclic Sense in Low-Power Mode

If Cyclic Sense is intended for use in SBC Stop or SBC Sleep Mode, it is necessary to activate Cyclic Sense in SBC Normal Mode before going to the low-power mode. A wake-up event due to Cyclic Sense sets the bit WK_WU. In SBC Stop Mode a wake-up event triggers an interrupt, in SBC Sleep Mode the wake-up event moves the device via SBC Restart Mode to SBC Normal Mode.

Before returning to SBC Sleep Mode, the wake status registers **WK_STAT_0** and **WK_STAT_1** need to be cleared. Trying to go to SBC Sleep Mode with uncleared wake flags leads to a direct wake-up from Sleep Mode by going via Restart Mode to Normal Mode and triggering of RSTN.

The intention of this behavior is to prevent a loss of a wake-up event during the transition.

Note: if an over-current shutdown occurs at the GPIO HS in SBC Sleep Mode, while configured as Cyclic Sense, and Cyclic Sense is the only wake source, then the SBC leaves SBC Sleep Mode immediately because there is no other wake source available .

5.2.2 Cyclic Wake

The Cyclic Wake feature is intended to reduce the quiescent current of the device in the application. The internal timer wakes the load, e.g. the microcontroller, periodically while it is in a low-power mode for the most of the time.

For the Cyclic Wake feature the timer is configured as an internal wake-up source and periodically triggers an interrupt on INTN in SBC Normal and SBC Stop Mode. During SBC Sleep Mode, the timer periodically wakes the device (via SBC Restart to SBC Normal Mode).

The correct sequence to configure the Cyclic Wake is shown in Figure 11. The sequence is as follows:

- Enable Timer as a wake-up source in the register WK_CTRL_0,
- Configure the period of the Timer. Also an On-time (any value except '000' or '110' or '111') must be selected to start the Cyclic Wake function.

System Features



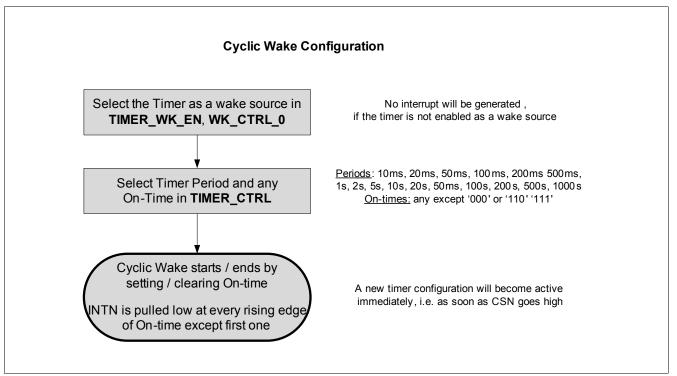


Figure 11 Cyclic Wake: Configuration and Sequence

As in Cyclic Sense, the Cyclic Wake function starts as soon as the On-time is configured. An interrupt is generated for every start of the On-time except for the very first time when the timer is started.

5.2.3 Internal Timer

The integrated timer can be used to control the below features:

- Cyclic Wake, i.e. to wake-up the microcontroller periodically in SBC Normal, Stop and Sleep Mode
- Cyclic Sense, i.e. to perform cyclic sensing using the wake input WK/VSENSE and the GPIO configured as HS by mapping the timer accordingly via the GPIO_CTRL register.

Following periods and On-times can be selected via the register **TIMER_CTRL** respectively:

- Period: 10ms, 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 2s, 5s, 10s, 20s, 50s, 100s, 200s, 500s, 1000s
- On-time: 0.1ms / 0.3ms / 1.0ms / 10ms / 20ms / Off at High or Low

Note: It is also possible to activate Cyclic Sense and Cyclic Wake at the same time with the same timer setting



5.3 Charge Pump Output for Reverse Polarity Protection

A gate-driver (charge-pump output) is integrated in the TLE9461-3ES V33 to drive external n-channel logiclevel MOSFETs on-board to provide Reverse Polarity Protection in the application or to control a KL. 30 switch (see **Figure 12**). The gate voltage is provided at the pin VCP which should be connected as shown in **Chapter 14**. The Charge Pump is able to drive up to 3 n-channel MOSFETs with a typ. Ron of 5mΩ.

A spread spectrum modulation feature is implemented for improved EMC behavior. Enabling and configuring the spread spectrum modulation frequency is achieved via the SPI bits **SS_MOD_FR**.

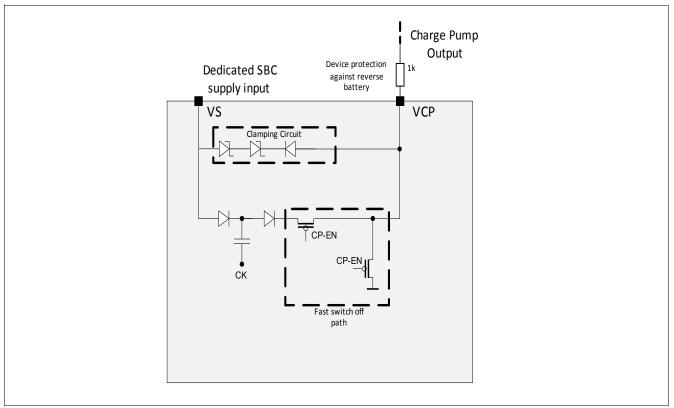


Figure 12 Simplified Charge Pump Block

The charge pump output VCP is disabled in SBC Init Mode and can be configured in SBC Normal Mode via the SPI bit CP_EN. To prevent an unintentional modification of the charge pump state the bit CP_EN can be locked by setting the bit CFG_LOCK_0. In case the charge pump output must be disabled again then it is necessary to clear CFG_LOCK_0 before.

The Charge Pump will also stay enabled in the SBC Stop, Sleep, Restart or Fail-Safe Mode if it was not disabled before entering the respective mode. It does not switch-Off due to overvoltage.

Diagnosis is available by checking the bit **CP_EN**.



5.3.1 Electrical Characteristics for Charge Pump

Table 10 Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.	_	Test Condition	
Charge Pump Output Voltage	V _{CP_1}	V _S + 4.5	-	V _S + 6.5	V	$^{1)}V_{\rm S} = 5.5V;$ $I_{\rm CP} = -40 {\rm uA};$ $C_{\rm L} = 3.3 {\rm nF}$	P_5.3.1
Charge Pump Output Voltage	<i>V</i> _{CP_2}	V _S + 9.5	-	V _S + 14	14 V $\frac{1}{2}V_{S} = 10V;$ $I_{CP} = -100uA;$ $C_{I} = 3.3nF$		P_5.3.2
Charge Pump Output Voltage	<i>V</i> _{CP_3}	V _S +10	-	V _s +16	V	$^{1)}V_{S} \ge 13.5V;$ $I_{CP} = -200uA;$ $C_{L} = 3.3nF$	P_5.3.3
Maximum Charge Pump Output Current	I _{CP}	200	-	1200	μΑ	$^{1)2)}V_{CP} = V_{S} + 10V;$ $V_{S} \ge 13.5V;$ $C_{L} = 3.3nF$	P_5.3.4
Charge Pump Leakage Current	I _{CP,LK}	-	0.5	2	μA	$^{2)}V_{CP} = 0V = Off;$ $V_{S} = 13.5V$	P_5.3.5
Charge Pump Enabling Time	t _{CP_ON}	-	95	200	μs	¹⁾²⁾ CSN = High to $V_{CP} > V_{S} + 10V;$ $V_{S} = 13.5V,$ $C_{L} = 3.3nF$	P_5.3.6
Charge Pump Disabling Time	t _{CP_OFF}	-	45	65	μs	¹⁾²⁾ CSN = High to $V_{CP} < V_{S} + 2V;$ $V_{S} = 13.5V,$ $C_{L} = 3.3nF$	P_5.3.7

1) Applies for the default frequency setting. See also SPI bits 2MHZ_FREQ

2) Not subject to production test, specified by design.



5.4 High-Voltage Measurement Interface

5.4.1 Block Description

This function provides the possibility to measure a voltage, e.g. the unbuffered battery voltage, with the protected WK/VSENSE HV-input. The measured voltage is routed out at FO/GPIO in case it is not configured as FO.

A simple external voltage divider needs to be placed to provide the appropriate voltage level to the microcontroller A/D converter input. For power-saving reasons, the function is available only in SBC Normal Mode and it is disabled in all other SBC modes.

The benefit of the function is that the signal is measured by a HV-input pin and that there is no current flowing through the resistor divider during low-power modes.

The functionality is shown in a simplified application diagram in Figure 52.

5.4.2 Functional Description

This measurement function is by default disabled. In this case, WK/VSENSE and FO/GPIO have their default functionality. The switch S_MEAS is open for this configuration (see Figure 52), i.e. there is no connection between the pins. The measurement function can be enabled via the SPI bit WK_MEAS. If WK_MEAS is set to '1', then the measurement function is enabled and the switch S_MEAS is closed in SBC Normal Mode. S_MEAS is open in all other SBC modes. In this function the pull-up and pull-down currents of WK/VSENSE and FO/GPIO are disabled and the internal WK/VSENSE and FO/GPIO signals are gated. In addition, the settings for WK/VSENSE and FO/GPIO in the registers WK_PUPD_CTRL, WK_CTRL_1 and GPIO_CTRL are ignored but changing these setting is not prevented. The registers WK_STAT_0, WK_STAT_1 and WK_LVL_STAT are not updated with respect to the inputs WK/VSENSE and FO/GPIO. However, if only WK/VSENSE or GPIO WK are set as wake sources and a SBC Sleep Mode command is set, then the SPI_FAIL flag is set and the SBC changes into SBC Restart Mode (see Chapter 5.1 also for wake capability of WK/VSENSE and GPIO WK).

If WK_MEAS is set then neither the FO (including the FO test via FO_ON) nor the GPIO functionality or wake functionality is available. Trying to change the GPIO_CTRL configurations will set the SPI_FAIL.

If FO/GPIO is configured as FO or any other GPIO configuration, then WK_MEAS cannot be set and SPI_FAIL is triggered, i.e. FO/GPIO must be first set Off initially.

Affected Settings/Modules for WK/VSENSE and FO/GPIO Inputs	WK_MEAS = 0	WK_MEAS = 1
S_MEAS configuration	ʻopen'	'closed' in SBC Normal Mode, 'open' in all other SBC Modes but configuration is kept
Internal WK/VSENSE & FO/GPIO signal processing	Default wake and level signaling function, WK_STAT_0, WK_STAT_1 and WK_LVL_STAT are updated accordingly	WK/VSENSE and FO/GPIO signals are gated internally, WK_STAT_0, WK_STAT_1 and WK_LVL_STAT are not updated

Table 11 Differences between Normal WK Function and Measurement Function



Affected Settings/Modules for WK/VSENSE and FO/GPIO Inputs	WK_MEAS = 0	WK_MEAS = 1
WK_EN, GPIO configured as WK	Wake-up via WK/VSENSE and GPIO WK possible	Setting the wake enable bits is ignored, i.e. the measurement function has priority but the bits can be set. If only WK_EN and/or GPIO as WK are set while trying to go to SBC Sleep Mode, then the SPI_FAIL flag is set and the SBC changes into SBC Restart Mode
SBC Fail-Safe Mode behavior	WK/VSENSE is automatically activated as wake source; see Table 29 for GPIO behavior	Measurement function configuration is kept, switch S_MEAS is open
WK_PUPD_CTRL	normal configuration is possible	no pull-up or pull-down enabled
FO functionality	FO functionality is available if configured accordingly	FO functionality is not available. FO/GPIO must be set to Off before setting WK_MEAS. Otherwise the SPI_FAIL flag is set.

Table 11 Differences between Normal WK Function and Measurement Function (cont'd)

Note: There is a diode in series to the switch S_MEAS (not shown in the Figure 52), which influences the temperature behavior of the switch. See also Figure 13.



5.4.3 Electrical Characteristics for Measurement Interface

Table 12 Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Input leakage current	I _{wk_meas_lk}	-2		2	μΑ	0 V < V _{WK_IN} < VS + 0.3V Same parameter as P_10.3.5;	P_5.4.1
Drop Voltage across S_MEAS switch between WK/VSENSE and FO/GPIO when enabled for voltage measurement;	V _{Drop,S_MEAS}	40	160	250	mV	¹⁾ $4V < V_{WK_{IN}} < VS + 0.3V;$ VS + 0.3V; $I_{WK1} = 200\mu A;$ $T_j = 25^{\circ}C$ Refer to Figure 13	P_5.4.2

1) Not subject to production test; specified by design

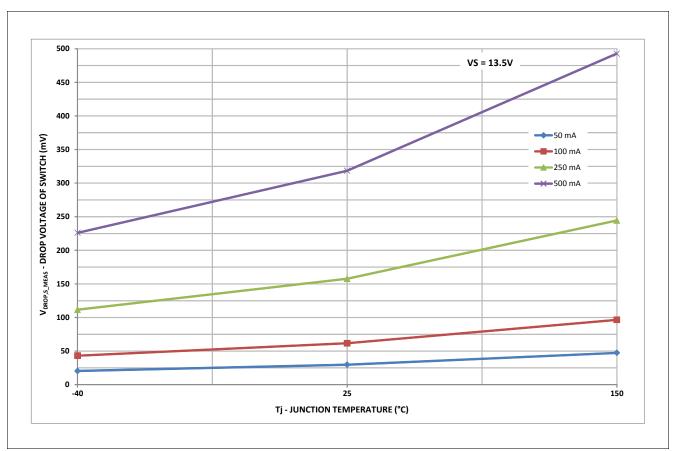


Figure 13 Typical Drop Voltage Characteristics of switch S_MEAS (between WK/VSENSE & FO/GPIO)



5.5 Spread Spectrum Modulation Frequency Function

The spread spectrum modulation frequency function can be used to reduce electromagnetic emissions for the charge pump.

The spread spectrum function can be enabled and configured by the bits **SS_MOD_FR**.

The spread spectrum function is derived from the internal 2MHz oscillator (~ 0.5μ s period). The calculations below are applied to the 2.0MHz setting (2MHZ_FREQ = '001' (for all the other frequencies the values can be derived).

There is a counter adjusting the oscillator step values up and down. There is a maximum of 32 steps for the counter available. For the frequency range $2MHZ_FREQ = '0xx'$ we can choose following modulation frequencies:

Setting	Periods / Step Width	Typ. Resulting Period	Typ. Modulation Frequency
SS_MOD_FR = '11'	0.5us / 1 period of 0.5us	16us	1/16us = 62.5 kHz
SS_MOD_FR = '10'	1.0us / 2 periods of 0.5us	32us	1/32us = 31.25 kHz
SS_MOD_FR = '01'	2.0us / 4 periods of 0.5us	64us	1/64us = 15.625 kHz

Table 13 Deriving the Modulation Frequency Steps



5.6 Partial Networking on CAN

5.6.1 CAN Partial Networking - Selective Wake Feature

The CAN Partial Networking (= Selective Wake) feature can be activated for SBC Normal Mode, in SBC Sleep Mode and in SBC Stop Mode. In SBC Sleep Mode the Partial Networking has to be activated before sending the SBC to Sleep Mode. For SBC Stop Mode the Partial Networking has to be activated before going to SBC Stop Mode.

There are 2 detection mechanisms available:

- WUP (Wake-Up Pattern) this is a CAN wake, that reacts on the CAN dominant time, with 2 dominant signals as defined in ISO WG11898-2:2016.
- WUF (Wake-Up frame) this is the wake-up on a CAN frame that matches the programmed message filter configured in the SBC via SPI.

The default baudrate is set to 500kBaud. Besides the commonly used baudrates of 125kBaud and 250kBaud, other baudrates up to 1MBaud can be selected (see **Chapter 13** for more details).



SBC Partial Networking Function 5.6.2

The CAN Partial Networking Modes are shown in this figure.

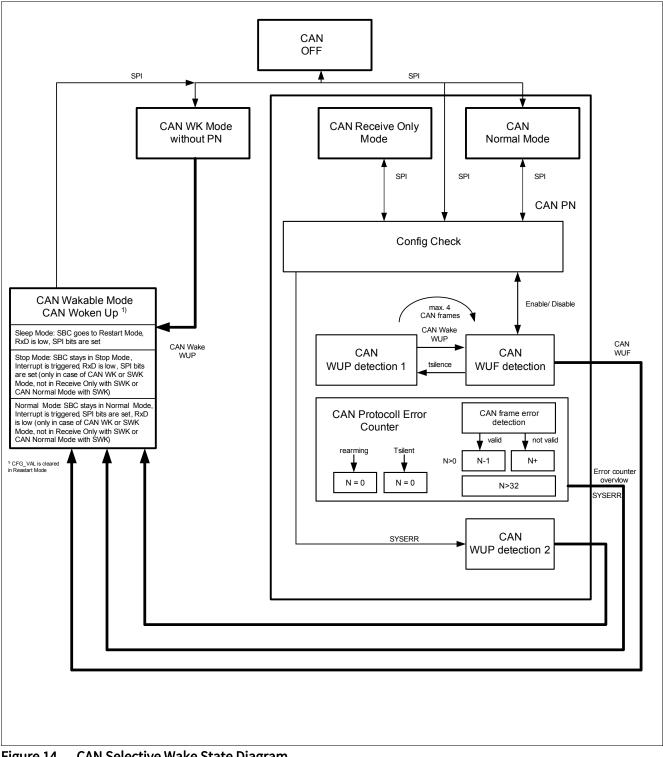


Figure 14 **CAN Selective Wake State Diagram**



5.6.2.1 Activation of SWK

Below figure shows the principal of the SWK activation.

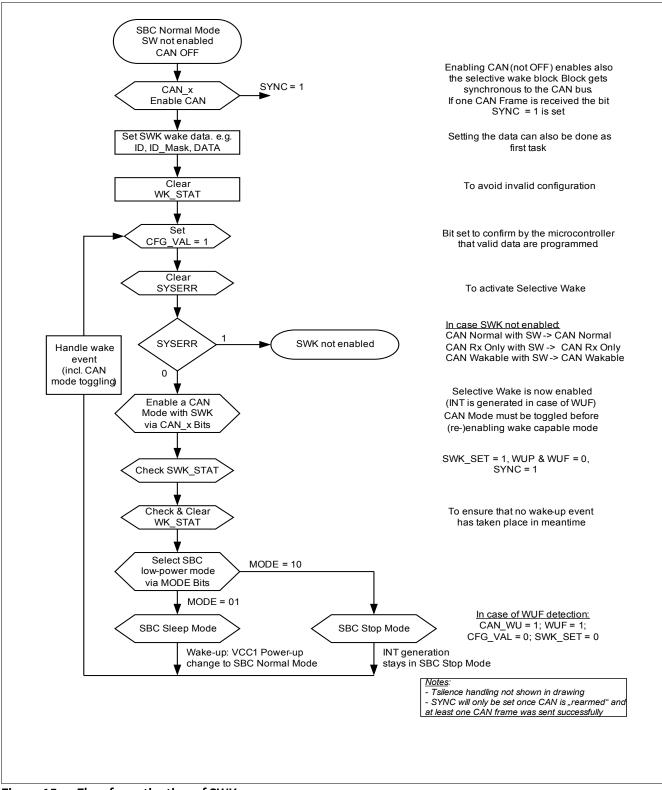


Figure 15 Flow for activation of SWK



5.6.2.2 Wake-up Pattern (WUP)

A WUP is signaled on the bus by two consecutive dominant bus levels for at least t_{Wake1}, separated by a recessive bus level.

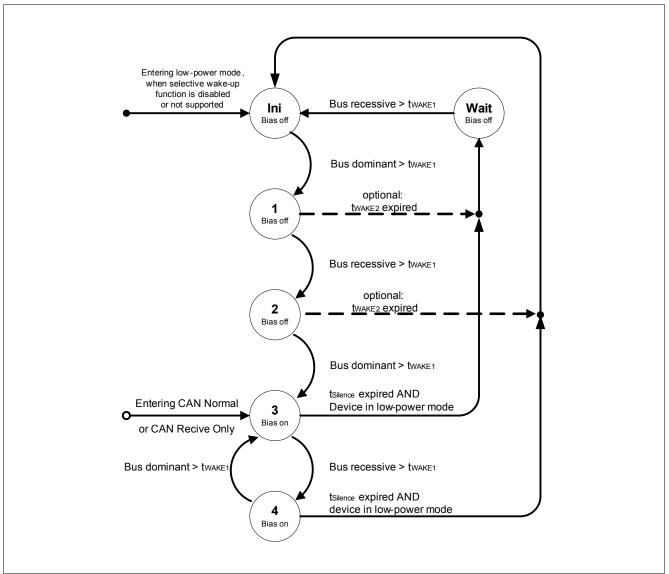


Figure 16 WUP detection following the definition of ISO 11898-2:2016

5.6.2.3 Wake-up Frame (WUF)

The wake-up frame is defined in ISO 11898-2:2016.

Only CAN frames according ISO11989-1 are considered as potential wake-up frames.

A bus wake-up shall be performed, if selective wake-up function is enabled and a "valid WUF" has been received. The transceiver may ignore up to four consecutive CAN data frames that start after switching on the bias.

A received frame is a "valid WUF" in case all of the following conditions are met:

- The ID of the received frame is exactly matching a configured ID in the relevant bit positions. The relevant bit positions are given by an ID mask. The ID and the ID mask might have either 11 bits or 29 bits.
- The DLC of the received frame is exactly matching the configured DLC.



- In case DLC is greater than 0, the data field of the received frame has at least one bit set in a bit position, where also in the configured data mask in the corresponding bit position the bit is set.
- No error exists according to ISO 11898-1 except errors which are signalled in the ACK field and EOF field.

5.6.2.4 CAN Protocol Error Counter

The counter is incremented, when a bit stuffing, CRC or form error according to ISO11898-1 is detected. If a frame has been received that is valid up to the end of the CRC field and the counter is not zero, the counter is decremented.

If the counter has reached a value of 31, the following actions is performed on the next increment of this counter:

- The selective wake function is disabled,
- The CAN transceiver is woken,
- SYSERR is set and the error counter value = 32 can be read.

By each increment or decrement of the counter the decoder unit waits for at least 6 and at the most 10 recessive bits before considering a dominant bit as new start of a frame.

The error counter is enabled:

• whenever the CAN is in Normal Mode, Receive Only Mode or in WUF detection state.

The error counter is cleared under the following conditions:

- At the transition from WUF detection to WUP detection 1 (after t_{SILENCE} expiration, while SWK is correctly enabled)
- When WUF detection state is entered (in this way the counter starts from 0 when SWK is enabled)
- At CAN rearming (when exiting the woken state)
- When the CAN Mode bits are selected '000', '100' (CAN Off) or '001' (Wake Capable without SWK function enabled)
- While CAN_FD_EN = '1' and DIS_ERR_CNT = '1' (the counter is cleared and stays cleared when these two bits are set in the SPI registers)

The Error Counter is frozen:

• after a wake-up being in woken state

The counter value can be read out of the bits **ECNT**.



5.6.3 Diagnoses Flags

5.6.3.1 PWRON/RESET-FLAG

The power-on reset can be detected and read by the **POR** bit in the SBC Status register. The VS power on resets all registers in the SBC to the reset value. SWK is not configured.

5.6.3.2 BUSERR-Flag

Bus Dominant Time-out detection is implemented and signaled by CAN_Fail_x in the register **BUS_STAT**.

5.6.3.3 TXD Dominant Time-out flag

TXD Dominant timeout is shown in the SPI bit CAN_FAIL_x in the register **BUS_STAT**.

5.6.3.4 WUP Flag

The WUP bit in the SWK_STAT register shows that a Wake-Up Pattern (WUP) has caused a wake-up of the CAN transceiver. It can also indicate an internal mode change from WUP detection 1 state to WUF detection after a valid WUP.

In the following case the bit is set:

- SWK is activated: due to t_{SILENCE}, the CAN changes into the state WUP detection 1. If a WUP is detected in this state, then the WUP bit is set
- SWK is deactivated: the WUP bit is set if a WUP wakes up the CAN. In addition, the CAN_WU bit is set.
- in case WUP is detected during WUP detection 2 state (after a SYSERR) the bits WUP and CAN_WU are set

The **WUP** bit is cleared automatically by the SBC at the next rearming of the CAN transceiver.

Note: It is possible that WUF and WUP bits are set at the same time, if a WUF causes a wake-up out of SWK, by setting the interrupt or by restarting out of SBC Sleep Mode. The reason is because the CAN has been in WUP detection 1 state during the time of SWK mode (because of t_{SILENCE}). See also Figure 14.

5.6.3.5 WUF Flag (WUF)

The WUF bit in the SWK_STAT register shows that a wake-up-Up frame (WUF) has caused a wake-up of the CAN block. In SBC Sleep Mode this wake-up causes a transition to SBC Restart Mode, in SBC Normal Mode and in SBC Stop Mode it causes an interrupt. Also in case of this wake-up the bit CAN_WU in the register WK_STAT_0 is set.

The WUF bit is cleared automatically by the SBC at the next rearming of the CAN SWK function.

5.6.3.6 SYSERR Flag (SYSERR)

The bit **SYSERR** is set in case of a configuration error and in case of an error counter overflow. The bit is only updated (set to '1') if a CAN mode with SWK is enabled via CAN_x. If INT_ GLOBAL is set, then an interrupt is triggered on INTN every time SYSERR is set.

When programming selective wake via CAN_x, SYSERR = '0' signals that the SWK function has been enabled. The bit can be cleared via SPI. The bit is '0' after Power-on Reset of the SBC.



5.6.3.7 Configuration Error

A configuration error sets the SYSERR bit to '1'. A configuration check is performed when enabling SWK via the bits CAN_x. If the check is successful SWK is enabled, the bit SYSERR is set to '0'. In SBC Normal Mode it is also possible to detect a Configuration Error while SWK is enabled. This occurs if the CFG_VAL bit is cleared, e.g. by changing the SWK registers (from address 010 0001 to address 011 0011). In SBC Sleep Mode this is not possible as the SWK registers can not be changed. However, in SBC Stop Mode the CFG_VAL bit is also cleared while trying to modify any SWK register.

Configuration Check:

in SBC Restart Mode, the **CFG_VAL** bit is cleared by the SBC. If the SBC Restart Mode was not triggered by a WUF wake-up from SBC Sleep Mode and the CAN was with SWK enabled, than the **SYSERR** bit is set. The SYSERR bit has to be cleared by the microcontroller.

The SYSERR bit cannot be cleared when CAN_2 is '1' and below conditions occur:

- Data valid bit not set by microcontroller, i.e. CFG_VAL is not set to '1'. The CFG_VAL bit is reset after SWK wake and needs to be set by the microcontroller before activation SWK again.
- CFG_VAL bit reset by the SBC when data are changed via SPI programming. (Only possible in SBC Normal Mode)

Note: The SWK configuration is still valid if only the SWK_CTRL register is modified.

5.6.3.8 CAN Bus Timeout-Flag (CANTO)

In CAN WUF detection and CAN WUP detection 2 state the bit CANTO is set to '1' if the time t_{SILENCE} expires. The bit can be cleared by the microcontroller. If the interrupt function for CANTO is enabled then an interrupt is generated in SBC Stop or SBC Normal Mode when the CANTO is set to '1'. The interrupt is enabled by setting the bit CANTO_ MASK to '1'. Each CANTO event triggers an interrupt even if the CANTO bit is not cleared.

There is no wake-up out of SBC Sleep Mode because of CAN time-out.

5.6.3.9 CAN Bus Silence-Flag (CANSIL)

In CAN WUF detection and CAN WUP detection 2 state the bit CANSIL is set to '1' if the time t_{SILENCE} expires. The CANSIL bit is set back to '0' with a WUP. With this bit the microcontroller can monitor if there is activity on the CAN bus while being in SWK Mode. The bit can be read in SBC Stop and SBC Normal Mode.

5.6.3.10 SYNC-FLAG (SYNC)

The bit SYNC shows that SWK is working and is synchronous to the CAN bus. To get a SYNC bit set it is required to enable the CAN in CAN Normal or in Receive Only Mode or in WUF detection. It is not required to enable the CAN SWK Mode.

The bit is set to '1' if a valid CAN frame has been received (no CRC error and no stuffing error). It is set back to '0' if a CAN protocol error is detected. When switching into SWK mode the SYNC bit indicates to the microcontroller that the frame detection is running and the next CAN frame can be detected as a WUF, CAN wake-up can now be handled by the SBC. It is possible to enter a SBC low-power mode with SWK even if the bit is not set to '1', as this is necessary in case of a silent bus.

5.6.3.11 SWK_SET FLAG (SWK_SET)

The SWK_SET bit is set to signalize the following states (see also Figure 14):

- when SWK was correctly enabled in WUF Detection state,
- when SWK was correctly enabled when in WUP Detection 1 state,



• after a SYSERR before a wake event in WUP Detection 2 state,

The bit is cleared under following conditions:

- after a wake-up (ECNT overflow, WUP in WUP detection 2, WUF in WUF detection)
- if CAN_2 is cleared

5.6.4 SBC Modes for Selective Wake (SWK)

The SBC mode is selected via the **MODE** bits as described in **Chapter 5.1**.

The mode of the CAN transceiver needs to be selected in SBC Normal Mode. The CAN mode is programed by the bits CAN_0, CAN_1 and CAN_2. In the low-power modes (SBC Stop, SBC Sleep) the CAN mode can not be changed via SPI.

The detailed SBC state machine diagram including the CAN selective wake feature is shown in Figure 3.

The application must now distinguish between the normal CAN operation an the selective wake function:

- WK Mode: This is the normal CAN Wake Capable mode without the selective wake function
- SWK Mode: This is the CAN Wake Capable mode with the selective wake function enabled

Figure 17 shows the possible CAN transceiver modes.

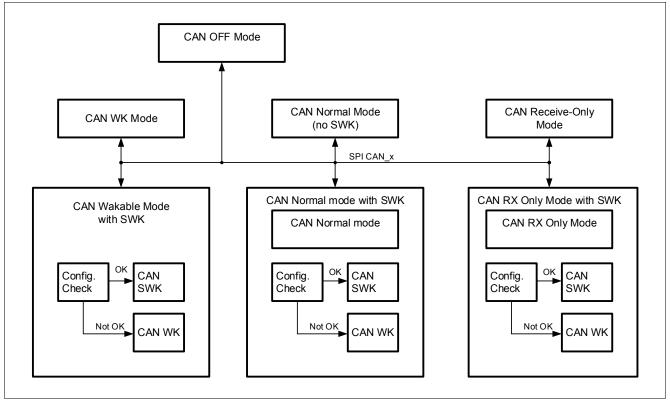


Figure 17 CAN SWK State Diagram

5.6.4.1 SBC Normal Mode with SWK

In SBC Normal Mode the CAN Transceiver can be switched into the following CAN Modes

- CAN Off
- CAN WK Mode (without SWK)
- CAN SWK Mode
- CAN Receive Only (No SWK activated)



- CAN Receive Only Mode with SWK
- CAN Normal Mode (No SWK activated)
- CAN Normal Mode with SWK

In the CAN Normal Mode with SWK the CAN Transceiver works as in SBC Normal Mode, so bus data is received through RXD, data is transmitted through TXD and sent to the bus. In addition the SWK block is active. It monitors the data on the CAN bus, updates the error counter and sets the **CANSIL** flag if there is no communication on the bus.

It generates a CAN Wake interrupt in case a WUF is detected (RXD is not pulled to low in this configuration).

In CAN Receive Only Mode with SWK, CAN data can be received on RXD and SWK is active, no data can be sent to the bus.

The bit **SYSERR** = '0' indicates that the SWK function is enabled, and no frame error counter overflow is detected.

CAN Mode	CAN_2	CAN_1	CAN_0
CAN Off	0	0	0
CAN WK Mode (no SWK)	0	0	1
CAN Receive Only (no SWK)	0	1	0
CAN Normal Mode (no SWK)	0	1	1
CAN Off	1	0	0
CAN SWK Mode	1	0	1
CAN Receive Only with SWK	1	1	0
CAN Normal Mode with SWK	1	1	1

Table 14CAN Modes selected via SPI in SBC Normal Mode

When reading back CAN_x the programmed mode is shown in SBC Normal Mode. To read the real CAN mode the bits **SYSERR**, **SWK_SET** and **CAN** have to be evaluated. A change out of SBC Normal Mode can change the CAN_0 and CAN_1 bits.

5.6.4.2 SBC Stop Mode with SWK

In SBC Stop Mode the CAN Transceiver can be operated with the following CAN Modes

- CAN Off
- CAN WK Mode (no SWK)
- CAN SWK Mode
- CAN Receive Only (no SWK)
- CAN Receive Only with SWK
- CAN Normal Mode (no SWK)
- CAN Normal Mode with SWK

To enable CAN SWK Mode the CAN has to be switched to "CAN Normal Mode with SWK", "CAN Receive Only Mode with SWK" or to "CAN SWK Mode" in SBC Normal Mode before sending the SBC to SBC Stop Mode. The bit SYSERR = '0' indicates that the SWK function is enabled. The table shows the change of CAN Mode when switching from SBC Normal Mode to SBC Stop Mode.

Note: CAN Receive Only Mode in SBC Stop Mode is implemented to also enable pretended networking (Partial networking done in the microcontroller).

Programmed CAN Mode in SBC Normal Mode	CAN_x bits	SYSERR bit	CAN Mode in SBC Stop Mode	CAN_x bits
CAN Off	000	0	CAN Off	000
CAN WK Mode (no SWK)	001	0	CAN WK Mode (no SWK)	001
CAN Receive Only (no SWK)	010	0	CAN Receive Only (no SWK)	010
CAN Normal Mode (no SWK)	011	0	CAN Normal Mode (no SWK)	011
CAN Off	100	0	CAN Off	100
CAN SWK Mode	101	0	CAN SWK Mode	101
CAN SWK Mode	101	1	CAN WK Mode (no SWK)	101
CAN Receive Only with SWK	110	0	CAN Receive Only with SWK	110
CAN Receive Only with SWK	110	1	CAN Receive Only (no SWK)	110
CAN Normal Mode with SWK	111	0	CAN Normal Mode with SWK	111
CAN Normal Mode with SWK	111	1	CAN Normal Mode (no SWK)	111

Table 15CAN Modes change when switching from SBC Normal Mode to SBC Stop Mode

Note: When SYSERR is set then WUF frames will not be detected, i.e. the selective wake function is not activated (no SWK), but the MSB of CAN mode is not changed in the register.

5.6.4.3 SBC Sleep Mode with SWK

In SBC Sleep Mode the CAN Transceiver can be switched into the following CAN Modes

- CAN Off
- CAN WK Mode (without SWK)
- CAN SWK Mode

To enable "CAN SWK Mode" the CAN has to be switched to "CAN Normal Mode with SWK", "CAN Receive Only Mode with SWK" or to "CAN SWK Mode" in SBC Normal Mode before sending the device to SBC Sleep Mode. The table shows the change of CAN mode when switching from SBC Normal Mode to Sleep Mode.

A wake-up from Sleep Mode with Selective Wake (Valid WUF) leads to Restart Mode. In Restart Mode the CFG_VAL bit is cleared by the SBC, the SYSERR bit is not set. In the register CAN_x the programmed CAN SWK Mode (101) can be read.

To enable the CAN SWK Mode again and to enter SBC Sleep Mode the following sequence can be used: Program a CAN Mode different from CAN SWK Mode (101, 110, 111), set the CFG_VAL, CLEAR SYSERR bit, set CAN_x bits to CAN SWK Mode (101), switch SBC to Sleep Mode.

To enable the CAN WK Mode or CAN SWK Mode again after a wake-up on CAN a rearming is required for the CAN transceiver to be wake capable again. The rearming is done by programming the CAN into a different mode with the CAN_x bit and back into the CAN WK Mode or CAN SWK Mode. To avoid lock-up when switching the SBC into Sleep Mode with an already woken CAN transceiver, the SBC does an automatic rearming of the CAN transceiver when switching into Sleep Mode. So after switching into Sleep Mode the CAN transceiver is either in CAN SWK Mode or CAN WK Mode depending on CAN_x setting and SYSERR bit (If CAN is switched to Off Mode it is also Off in Sleep Mode).



Programmed CAN Mode in SBC Normal Mode	CAN_x bits	SYSERR bit	CAN Mode in SBC Sleep Mode	CAN_x bits
CAN Off	000	0	CAN Off	000
CAN WK Mode (no SWK)	001	0	CAN WK Mode (no SWK)	001
CAN Receive Only (no SWK)	010	0	CAN WK Mode (no SWK)	001
CAN Normal Mode (no SWK)	011	0	CAN WK Mode (no SWK)	001
CAN Off	100	0	CAN Off	100
CAN SWK Mode	101	0	CAN SWK Mode	101
CAN SWK Mode	101	1	CAN WK Mode (no SWK)	101
CAN Receive Only with SWK	110	0	CAN SWK Mode	101
CAN Receive Only with SWK	110	1	CAN WK Mode (no SWK)	101
CAN Normal Mode with SWK	111	0	CAN SWK Mode	101
CAN Normal Mode with SWK	111	1	CAN WK Mode (no SWK)	101

Table 16CAN Modes change when switching to SBC Sleep Mode

5.6.4.4 SBC Restart Mode with SWK

If SBC Restart Mode is entered the transceiver can change the CAN mode. After a Restart the following modes are possible:

- CAN Off
- CAN WK Mode (either still Wake Cable or already woken up)
- CAN SWK Mode (WUF Wake from Sleep)

Table 17	CAN Modes change in case of Restart out of SBC Normal Mode
----------	--

Programmed CAN Mode in SBC Normal Mode	CAN_x bits	SYSERR bit	CAN Mode in and after SBC Restart Mode	CAN_x bits	SYSERR bit
CAN Off	000	0	CAN Off	000	0
CAN WK Mode (no SWK)	001	0	CAN WK Mode (no SWK)	001	0
CAN Receive Only (no SWK)	010	0	CAN WK Mode (no SWK)	001	0
CAN Normal Mode (no SWK)	011	0	CAN WK Mode (no SWK)	001	0
CAN Off	100	0	CAN Off	100	0
CAN SWK Mode	101	0	CAN WK Mode (no SWK)	101	1
CAN SWK Mode	101	1	CAN WK Mode (no SWK)	101	1
CAN Receive Only with SWK	110	0	CAN WK Mode (no SWK)	101	1
CAN Receive Only with SWK	110	1	CAN WK Mode (no SWK)	101	1
CAN Normal Mode with SWK	111	0	CAN WK Mode (no SWK)	101	1
CAN Normal Mode with SWK	111	1	CAN WK Mode (no SWK)	101	1

The various reasons for entering SBC Restart Mode and the respective status flag settings are shown in Table 18.



CAN Mode in SBC Sleep Mode	CAN Mode in and after SBC Restart Mode	CAN_ x	SYS ERR	CAN_ WU	WUP	WUF	ECNT_ x	Reason for Restart
CAN Off	CAN Off	000	0	0	0	0	0	Wake-up on other wake source
CAN WK Mode	CAN woken up	001	0	1	1	0	0	Wake (WUP) on CAN
CAN WK Mode	CAN WK Mode	001	0	0	0	0	0	Wake-up on other wake source
CAN SWK Mode	CAN woken up	101	0	1	$0/1^{1)}$	1	х	Wake (WUF) on CAN
CAN SWK Mode,	CAN woken up	101	1	1	0/12)	0	100000	Wake-up due to error counter overflow
CAN SWK selected, CAN WK active	CAN woken up.	101	1	1	1	0	0	Wake (WUP) on CAN, config check was not pass
CAN SWK Mode	CAN WK Mode	101	1	0	0/1	0	х	Wake-up on other wake source

Table 18 CAN Modes change in case of Restart out of SBC Sleep Mode

 In case there is a WUF detection within t_{SILENCE} then the WUP bit is not set. Otherwise it is always set together with the WUF bit.

2) In some cases the WUP bit might stay cleared even after t_{SILENCE}, e.g. when the error counter expires without detecting a wake-up pattern.

5.6.4.5 SBC Fail-Safe Mode with SWK

When SBC Fail-Safe Mode is entered the CAN transceiver is automatically set into WK Mode (wake capable) without the selective wake function.

5.6.5 Wake-up

A wake-up via CAN leads to a restart out of SBC Sleep Mode and to an interrupt in SBC Normal Mode and in SBC Stop Mode. After the wake-up event the bit CAN_WU is set, and the details about the wake-up can be read out of the bits WUP, WUF, SYSERR, and ECNT.

5.6.6 Configuration for SWK

The CAN protocol handler settings can be configured in following registers:

- SWK_BTL0_CTRL defines the number of time quanta in a bit time. This number depends also on the internal clock settings performed in the register SWK_CDR_CTRL2;
- **SWK_BTL1_CTRL** defines the sampling point position;
- The respective receiver during frame detection mode can be selected via the bit RX_WK_SEL;
- The clock and data recovery (see also Chapter 5.6.8) can be configured in the registers SWK_CDR_CTRL1, SWK_CDR_CTRL2, SWK_CDR_LIMIT_HIGH_CTRL and SWK_CDR_LIMIT_LOW_CTRL;

The actual configuration for selective wake is done via the Selective Wake Control Registers SWK_IDx_CTRL, SWK_MASK_IDx_CTRL, SWK_DATAx_CTRL.

The oscillator has the option to be trimmed by the microcontroller. To measure the oscillator, the SPI bit OSC_CAL needs to be set to 1 and a defined pulse needs to be given to the TXDCAN pin by the microcontroller (e.g. 1µs pulse, CAN needs to be switched Off before). The SBC measures the length of the pulse by counting



the time with the integrated oscillator. The counter value can be read out of the register SWK_OSC_CAL_H_STATE and SWK_OSC_CAL_L_STATE. To change the oscillator the trimming function needs to be enabled by setting the bits TRIM_EN_x = 11 (and OSC_CAL = 1). The oscillator can then be adjusted by writing into the registers SWK_OSC_TRIM_CTRL and SWK_OPT_CTRL. To finish the trimming, the bits TRIM_EN_x must be set back to "00".

5.6.7 CAN Flexible Data Rate (CAN FD) Tolerant Mode

The CAN FD tolerant mode can be activated by setting the bit CAN_FD_ EN = '1' in the register SWK_CAN_FD_CTRL.

With this mode the internal CAN frame decoding is stopped for CAN FD frame formats:

- The high baudrate part of a CAN FD frame are ignored,
- No Error Handling (Bit Stuffing, CRC checking, Form Errors) is applied to remaining CAN frame fields (Data Field, CRC Field, ...),
- No wake-up is done on CAN FD frames.

The internal CAN frame decoder is ready for new CAN frame reception when the End of frame (EOF) of a CAN FD frame is detected. The identification for a CAN FD frame is based on the EDL Bit, which is sent in the Control Field of a CAN FD frame:

- EDL Bit = 1 identifies the current frame as a CAN FD frame and stops further decoding it.
- EDL Bit = 0 identifies the current frame as a CAN 2.0 frame and processing of the frame is continued

In this way it is possible to send mixed CAN frame formats without affecting the selective wake functionality by error counter increment and subsequent misleading wake-up. In addition to the CAN_FD_ EN bit also a filter setting must be provided for the CAN FD tolerant mode. This filter setting defines the minimum dominant time for a CAN FD dominant bit which is considered as a dominant bit from the CAN FD frame decoder. This value must be aligned with the selected high baudrate of the data field in the CAN network.

To support programming via CAN during CAN FD mode a dedicated SPI bit **DIS_ERR_CNT** is available to avoid an overflow of the implemented error counter (see also **Chapter 5.6.2.4**).

The behavior of the error counter depends on the setting of the bits **DIS_ERR_ CNT** and **CAN_FD_ EN** and is show in below table:

DIS_ERR_ CNT setting	CAN_FD_ EN setting	Error Counter Behavior
0	0	Error Counter counts up when a CAN FD frame or an incorrect/corrupted CAN frame is received; counts down when a CAN frame is received properly (as specified in ISO 11898-2:2016)
1	0	Error Counter counts up when a CAN FD frame or an incorrect/corrupted CAN frame is received; counts down when a CAN frame is received properly (as specified in ISO 11898-2:2016)
0	1	Error Counter counts down when correct CAN (incl. CAN FD) frame is received
1	1	Error Counter is and stays cleared to avoid an overflow during programming via CAN

Table 19Error Counter Behavior

The **DIS_ERR_CNT** bit is automatically cleared at Tsilence (**t**_{SILENCE}) expiration.



5.6.8 Clock and Data Recovery

In order to compensate possible deviations on the CAN oscillator frequency caused by assembly and lifetime effects, the device features an integrated clock and data recovery (CDR).

It is recommended to always enable the CDR feature during SWK operation.

5.6.8.1 Configuring the Clock Data Recovery for SWK

The Clock and Data Recovery can be optionally enabled or disabled with the CDR_EN bit in the SWK_CDR_CTRL1 SPI register. In case the feature is enabled, the CAN bit stream is measured and the internal clock used for the CAN frame decoding is updated accordingly.

Before the Clock and Data Recovery can be used it must be configured properly related to the used baud rate and filtering characteristics (see **Chapter 5.6.8.2**).

It is strongly recommended not to enable/disable the Clock Recovery during an active CAN Communication. To ensure this, it is recommended to enable/disable it during CAN Off (**BUS_CTRL_0**; CAN[2:0] = 000).

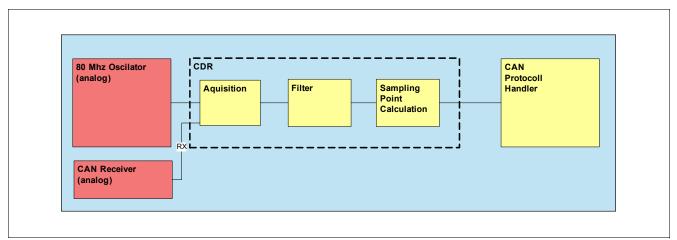


Figure 18 Clock and Data Recovery Block Diagram



5.6.8.2 Setup of Clock and Data Recovery

It is strongly recommended to enable the clock and data recovery feature only when the setup of the clock and data recovery is finished.

The following sequence should be followed for enabling the clock and data recovery feature:

- Step 1: Switch CAN to Off and CDR_EN to Off Write SPI Register BUS_CTRL_0 (CAN[2:0] = 000).
- Step 2: Configure CDR Input clock frequency Write SPI Register SWK_CDR_CTRL2 (SEL_OSC_CLK[1:0]).
- Step 3: Configure Bit timing Logic
 Write SPI Register SWK_BTL0_CTRL and adjust SWK_CDR_LIMIT_HIGH_CTRL and SWK_CDR_LIMIT_LOW_CTRL according to Table 36.
- Step 4: Enable Clock and Data Recovery Choose filter settings for Clock and Data recovery. Write SPI Register SWK_CDR_CTRL1 with CDR_EN = 1

Additional hints for the CDR configuration and operation:

- Even if the CDR is disabled, when the baud rate is changed, the settings of SEL_OSC_CLK in the register SWK_CDR_CTRL1 and SWK_BTL0_CTRL have to be updated accordingly,
- The SWK_CDR_LIMIT_HIGH_CTRL and SWK_CDR_LIMIT_LOW_CTRL registers have to be also updated when the baud rate or clock frequency is changed (the CDR is discarding all the acquisitions and loses all acquired information, if the limits are reached - the SWK_BTL0_CTRL value is reloaded as starting point for the next acquisitions)
- When updating the CDR registers, it is recommended to disable the CDR and to enable it again only after the new settings are updated,
- The SWK_BTL1_CTRL register represents the sampling point position. It is recommended to be used at default value: 11 0011 (~80%)



5.6.9 Electrical Characteristics

Table 20Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; 4.75 V < VCAN < 5.25 V; $R_{\rm L}$ = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin

(unless otherwise specified)

Parameter	Symbol		Value	s	Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
CAN Partial Network Timing							I
Timeout for bus inactivity	t _{SILENCE}	0.6	-	1.2	S	1)	P_5.13.1
Bus Bias reaction time	t _{bias}	_	-	250	μs	¹⁾ Load $R_L = 60 \Omega$, $C_L = 100 \text{ pF}$, $C_{\text{GND}} = 100 \text{ pF}$	P_5.13.2
Wake-up reaction time (WUP or WUF)	t _{wu_wup/wuf}	-	-	100	μs	¹⁾²⁾³⁾ Wake-up reaction time after a valid WUP or WUF;	P_5.13.3
Min. Bit Time	t _{Bit_min}	1	-	-	μs	1)4)	P_5.13.4
CAN FD Tolerance ⁵⁾							
Dominant signals which are ignored (up to 2MBit/s)	t _{FD_Glitch_4}	0	-	5	%	⁶⁾⁷⁾ of arbitration bit time; to be configured via FD_FILTER ;	P_5.13.5
Dominant signals which are ignored (up to 5MBit/s)	t _{FD_Glitch_10}	0	-	2.5	%	⁶⁾⁸⁾ of arbitration bit time; to be configured via FD_FILTER ;	P_5.13.6
Signals which are detected as a dominant data bit after the FDF bit and before EOF bit (up to 2MBit/s)	t _{FD_DOM_4}	17.5	-	-	%	⁶⁾⁷⁾ of arbitration bit time; to be configured via FD_FILTER;	P_5.13.7
Signals which are detected as a dominant data bit after the FDF bit and before EOF bit (up to 5MBit/s)	t _{FD_DOM_10}	8.75	-	-	%	⁶⁾⁸⁾ of arbitration bit time; to be configured via FD_FILTER;	P_5.13.8

1) Not subject to production test, tolerance defined by internal oscillator tolerance

2) Wake-up is signalized via INTN pin activation in SBC Stop Mode and via VCC1 ramping up with wake from SBC Sleep Mode;

3) For WUP: time starts with end of last dominant phase of WUP; for WUF: time starts with end of CRC delimiter of the WUF

4) The minimum bit time corresponds to a maximum bit rate of 1 Mbit/s. The lower end of the bit rate depends on the protocol IC or the permanent dominant detection circuitry preventing a permanently dominant clamped bus.

5) Applies for an arbitration rate of up to 500kbps until the FDF bit is detected and RX_WK_SEL = 1.



- 6) Not subject to production test; specified by design.
- 7) A data phase bit rate less or equal to four times of the arbitration bit rate or 2 Mbit/s, whichever is lower.
- 8) A data phase bit rate less or equal to ten times of the arbitration bit rate or 5 Mbit/s, whichever is lower.



6 Voltage Regulator 1

6.1 Block Description

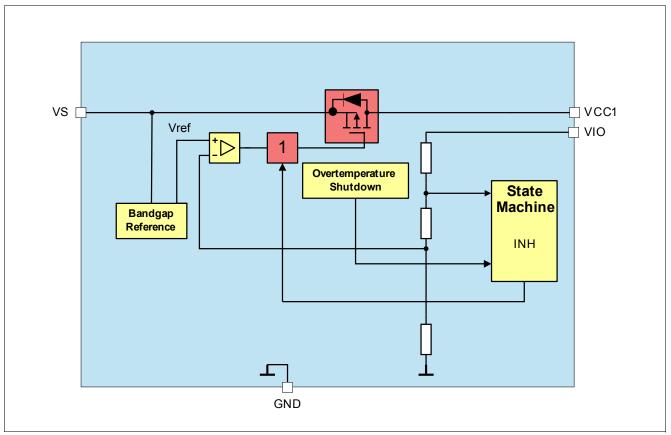


Figure 19 Module Block Diagram

Functional Features

- 3.3V low-dropout linear voltage regulator
- Undervoltage monitoring with adjustable reset level, VCC1 prewarning and VCC1 short circuit detection (V_{RT1/2/3/4}, V_{PW,f}). Please refer to Chapter 12.5 and Chapter 12.6 for more information.
- Short circuit detection and switch Off with undervoltage fail threshold, device enters SBC Fail-Safe Mode
- ≥1μF ceramic capacitor at voltage output for stability, with ESR < 1Ω @ f = 10 kHz, to achieve the voltage regulator control loop stability based on the safe phase margin (bode diagram).
- Output current limit $I_{VCC1,lim}$ configurable via SPI up to $I_{VCC1,lim_{-11}}$.



6.2 Functional Description

The Voltage Regulator 1 (=VCC1) is always enabled in SBC Normal, Stop and Restart Mode and is disabled in SBC Sleep and in Fail-Safe Mode. VCC1 is the voltage regulator output. VIO is the regulation feedback, supervision input and the supply for the digital in- and outputs. Therefore, the pins VCC1 and VIO must always be connected.

Current Limitation Configurations:

The regulator can provide an output current up to I_{VCC1,lim}. The current limitation threshold can be adjusted with the bits ICC1_LIM_ADJ. A soft-start feature is implemented that limits the current to the lowest value during start-up of VCC1 as long as RSTN is Low. After t_{RD1} has expired, the default value is resumed after power-up or the configured value after SBC Sleep- or Fail-Safe Mode.

Table 21	Current Limitation Configurations
----------	--

SPI Setting	Typ. Limitation Current	Note
·00'	0.75 A	default value, recommended setting
·01'	1.0 A	setting for maximum peak load current / large external capacitor values
ʻ10'	1.2 A	setting not recommended
'11'	1.5 A	setting not recommended

For low-quiescent current reasons, the output voltage accuracy is decreased in SBC Stop Mode because a less accurate low-power mode regulator is active for very small loads. If the load current on VCC1 exceeds the selected threshold ($I_{VCC1,lpeak1,r}$ or $I_{VCC1,lpeak2,r}$) then the high-power mode regulator is also activated to support an optimum dynamic load behavior. The current consumption increases by typ. 2.9mA. The SBC Mode stays unchanged.

If the load current on VCC1 falls below the selected threshold (I_{VCC1,Ipeak1,f} or I_{VCC1,Ipeak2,f}), then the low-quiescent current mode is resumed again by disabling the high-power mode regulator.

Both regulators (low-power mode and high-power mode) are active in SBC Normal Mode.

Two different active peak thresholds can be selected via SPI:

- I_PEAK_TH = '0'(default): the lower VCC1 active peak threshold 1 is selected with lowest quiescent current consumption in SBC Stop Mode (I_{Stop_1,25}, I_{Stop_1,85});
- I_PEAK_TH = '1': the higher VCC1 active peak threshold 2 is selected with an increased quiescent current consumption in SBC Stop Mode (I_{Stop 2.25}, I_{Stop 2.85});



6.3 Electrical Characteristics

Table 22Electrical Characteristics

 V_s = 3.8V to 28V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
Output Voltage including Line and Load Regulation	V _{CC1,out1}	3.23	3.3	3.37	V	¹⁾ SBC Normal Mode; 10μA < I _{VCC1} < 150mA	P_7.3.4
Output Voltage including Line and Load Regulation (Full Load Current Range)	V _{CC1,out2}	3.23	3.3	3.37	V	²⁾ SBC Normal Mode; 5.5V < V _S < 28V; 10μA < I _{VCC1} < 250mA	P_7.3.22
Output Voltage including Line and Load Regulation (Higher Accuracy Range)	V _{CC1,out3}	3.27	3.3	3.34	V	¹⁾³⁾ SBC Normal Mode; 20mA < <i>I</i> _{VCC1} < 80mA; 8V < <i>V</i> _S < 18V; 25°C < <i>T</i> _j < 125°C	P_7.3.5
Output Voltage including Line and Load Regulation (Low-Power Mode)	V _{CC1,out4}	3.26	3.3	3.4	V	SBC Stop Mode; 10μA < I _{VCC1} < I _{VCC1,Ipeak}	P_7.3.6
Output Drop Voltage	V _{CC1,d2}	-	-	500	mV	$I_{\rm VCC1} = 200 {\rm mA},$ $V_{\rm S} = 3.3 {\rm V}$	P_7.3.23
VCC1 Active Peak Threshold 1 (Transition threshold between low-power and high- power mode regulator)	/ _{VCC1,Ipeak1,r}	1.5	3.25	5.0	mA	³⁾ <i>I</i> _{CC1} rising; <i>V</i> _S = 13.5V; I_PEAK_TH = '0'	P_7.3.9
VCC1 Active Peak Threshold 1 (Transition threshold between high-power and low- power mode regulator)	/ _{VCC1,Ipeak1,f}	1.2	2.3	3.5	mA	³⁾ <i>I</i> _{CC1} falling; <i>V</i> _S = 13.5V; I_PEAK_TH = '0'	P_7.3.10
VCC1 Active Peak Threshold 2 (Transition threshold between low-power and high- power mode regulator)	I _{VCC1,Ipeak2,r}	2.5	6.25	10	mA	³⁾ <i>I</i> _{CC1} rising; <i>V</i> _S = 13.5V; I_PEAK_TH = '1'	P_7.3.11
VCC1 Active Peak Threshold 2 (Transition threshold between high-power and low- power mode regulator)	I _{VCC1,Ipeak2,f}	2.2	4.5	8	mA	³⁾ <i>I</i> _{CC1} falling; <i>V</i> _S = 13.5V; I_PEAK_TH = '1'	P_7.3.12
Overcurrent Limitation (ICC1_LIM_ADJ= '00')	I _{VCC1,lim_00}	0.6	0.75	0.95	A	³⁾⁴⁾ current flowing out of pin, V _{CC1} = 0V, V _S > 6V, default value	P_7.3.13



Table 22Electrical Characteristics (cont'd)

 V_s = 3.8V to 28V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
Overcurrent Limitation (ICC1_LIM_ADJ= '01')	I _{VCC1,lim_01}	0.8	1.0	1.25	A	$^{3)4)}$ current flowing out of pin, $V_{CC1} = 0V$, $V_{S} > 6V$	P_7.3.19
Overcurrent Limitation (ICC1_LIM_ADJ= '10')	I _{VCC1,lim_10}	0.96	1.25	1.60	A	³⁾⁴⁾ current flowing out of pin, $V_{CC1} = 0V$, $V_{S} > 6V$	P_7.3.20
Overcurrent Limitation (ICC1_LIM_ADJ= '11')	I _{VCC1,lim_11}	1.1	1.5	1.95	A	$^{3)4)}$ current flowing out of pin, $V_{CC1} = 0V$, $V_{S} > 6V$	P_7.3.21

 In SBC Stop Mode, the specified output voltage tolerance applies when I_{VCC1} has exceeded the selected active peak threshold (I_{VCC1,Ipeak1,r} or I_{VCC1,Ipeak2,r}) but with increased current consumption.

 In SBC Stop Mode, the specified output voltage tolerance applies when I_{VCC1} has exceeded the selected active peak threshold (I_{VCC1,Ipeak1,r} or I_{VCC1,Ipeak2,r}) but with increased current consumption.

3) Not subject to production test, specified by design.

4) Current limitation value is max. 20% higher for $V_{POR,f} < V_S < 6$ V to optimize low-drop operation behavior.

Voltage Regulator 2



7 Voltage Regulator 2

7.1 Block Description

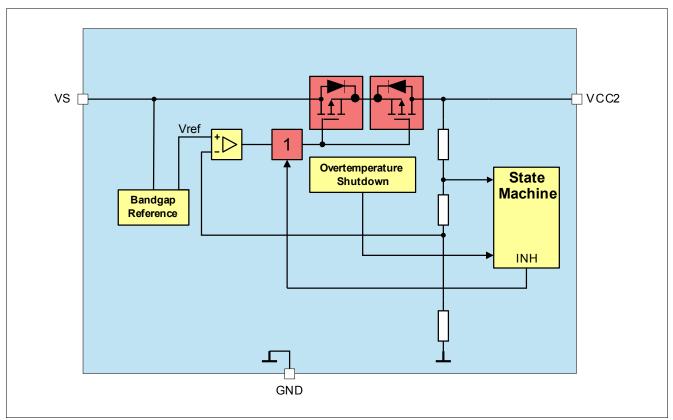


Figure 20 Module Block Diagram

Functional Features

- 5 V low drop-out linear voltage regulator
- Protected against short to battery voltage, e.g. for off-board sensor supply
- Can also be used for CAN supply
- VCC2 undervoltage monitoring. Please refer to Chapter 12.7 for more information
- Can be active in SBC Normal, SBC Stop, and SBC Sleep Mode (not SBC Fail-Safe Mode)
- VCC2 switches Off after entering SBC Restart Mode. Switch Off is latched, LDO must be enabled via SPI after shutdown.
- Overtemperature protection
- ≥ 470nF ceramic capacitor at output voltage for stability, with ESR < 1Ω @ f = 10 kHz, to achieve the voltage regulator control loop stability based on the safe phase margin (bode diagram).
- Output current capability up to I_{VCC2,lim}.



7.2 Functional Description

In SBC Normal Mode VCC2 can be switched On or Off via SPI.

For SBC Stop- or Sleep Mode, the VCC2 has to be switched On or Off in SBC Normal Mode before entering the respective SBC mode. The regulator is automatically switched Off in SBC Restart Mode

The regulator can provide an output current up to $I_{VCC2,lim}$.

For low-quiescent current reasons, the output voltage accuracy is decreased in SBC Stop and Sleep Mode (if enabled) because a low-power mode regulator with a lower accuracy ($V_{CC2,out4}$) is active for small loads. If the load current on VCC2 exceeds $I_{VCC2} > I_{VCC2,lpeak,r}$ then the high-power mode regulator will also be enabled to support an optimum dynamic load behavior. The current consumption increases by typ. 2.9mA. The SBC Mode stays unchanged.

If the load current on VCC2 falls below the threshold ($I_{VCC2} < I_{VCC2,Ipeak,f}$), then the low-quiescent current mode is resumed by disabling the high-power mode regulator.

Both regulators are active in SBC Normal Mode.

- *Note:* If the VCC2 output voltage is supplying external off-board loads, the application must consider the series resonance circuit built by cable inductance and decoupling capacitor at the load. Sufficient damping must be provided.
- *Note:* To avoid excessive repetitive short-circuit conditions, It is recommended to detect the shutdown reason for VCC2 and keep the regulator Off after multiple over-temperature shutdowns.

7.2.1 Short to Battery Protection

The output stage is protected for short to VBAT. No inverse current flows if the voltage on VCC2 is higher than the nominal output voltage.



7.3 Electrical Characteristics

Table 23 Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
Output Voltage Including Line and Load Regulation (Full Load Current Range)	V _{CC2,out1}	4.9	5.0	5.1	V	¹⁾ SBC Normal Mode; 10 μ A < I_{VCC2} < 100mA 6V < V_{S} < 28V	P_8.3.1
Output Voltage Including Line and Load Regulation	V _{CC2,out2}	4.9	5.0	5.1	V	¹⁾ SBC Normal Mode; 10μA < I _{VCC2} < 50mA	P_8.3.2
Output Voltage Including Line and Load Regulation (Higher Accuracy Range)	V _{CC2,out3}	4.95	5.0	5.05	V	²⁾ SBC Normal Mode; 10μA < <i>I</i> _{VCC2} < 5mA 8V < <i>V</i> _S < 18V	P_8.3.3
Output Voltage Including Line and Load Regulation (Low-Power Mode)	V _{CC2,out4}	4.9	5.05	5.2	V	SBC Stop / Sleep Mode; 10µA < I _{VCC2} < I _{VCC2,Ipeak}	P_8.3.4
Drop-Out Voltage	V _{CC2,d1}	-	-	500	mV	I _{VCC2} =30mA V _S =5V	P_8.3.5
VCC2 Active Peak Threshold (Transition threshold between low-power and high- power mode regulator)	I _{VCC2,Ipeak,r}	2.3	3.3	4.4	mA	$^{2)}$ / _{CC2} rising; V _S = 13.5V;	P_8.3.6
VCC2 Active Peak Threshold (Transition threshold between high-power and low- power mode regulator)	I _{VCC2,Ipeak,f}	1.4	2.2	3.2	mA	$^{2)}I_{CC2}$ falling; $V_{S} = 13.5V;$	P_8.3.7
Overcurrent limitation	I _{VCC2,lim}	100	-	450	mA	²⁾ current flowing out of pin, $V_{CC2} = 0V$	P_8.3.8

 In SBC Stop Mode, the specified output voltage tolerance applies when I_{VCC2} has exceeded the selected active peak threshold (I_{VCC2,Ipeak,r}) but with increased current consumption.

2) Not subject to production test, specified by design.



Voltage Regulator 2

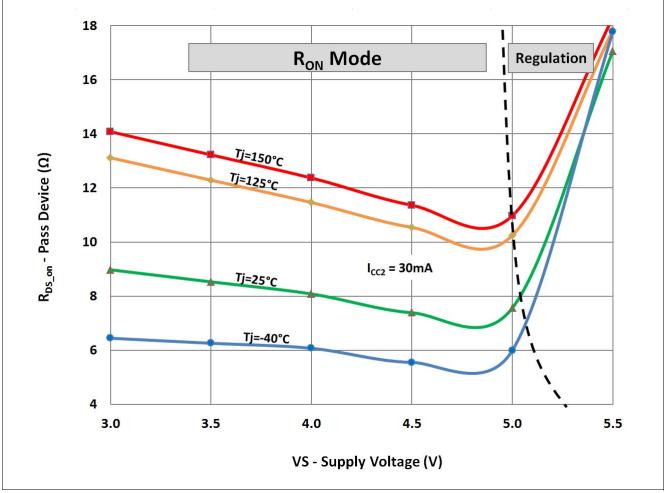


Figure 21 Typical on-resistance of VCC2 pass device during linear (R_{ON}) mode for /_{CC2} = 30mA



Voltage Regulator 2

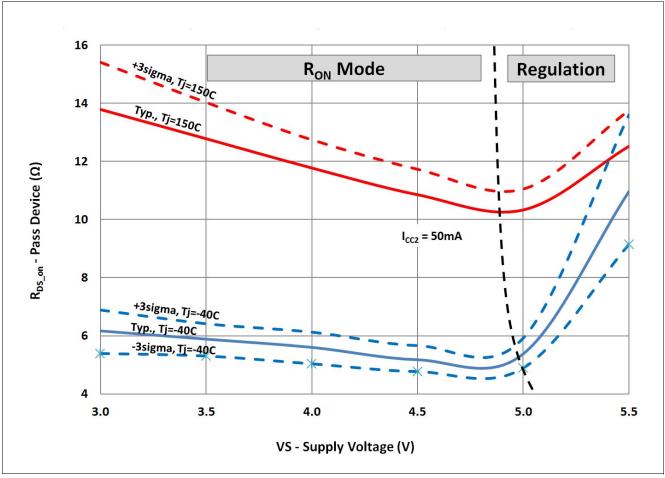


Figure 22 On-resistance range of VCC2 pass device during linear (R_{ON}) mode for $/_{CC2}$ = 50mA



High-Speed CAN FD Transceiver

8 High-Speed CAN FD Transceiver

8.1 Block Description

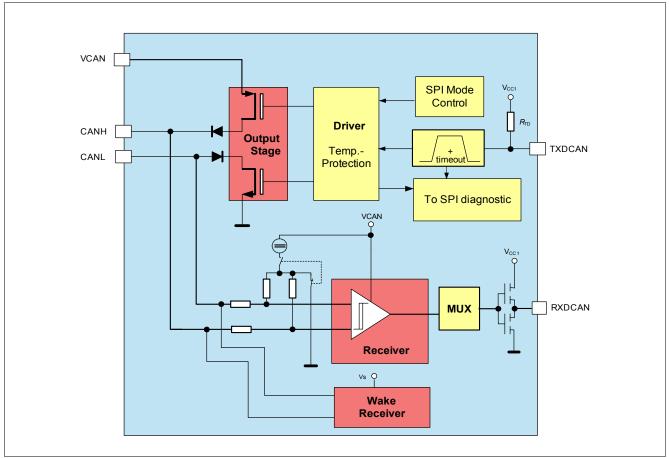


Figure 23 Functional Block Diagram

8.2 Functional Description

The Controller Area Network (CAN) transceiver part of the SBC provides High-Speed (HS) differential mode data transmission (up to 2Mbaud) and reception in automotive and industrial applications. It works as an interface between the CAN protocol controller and the physical bus lines compatible to ISO 11898-2:2016 and SAE J2284.

The CAN FD transceiver offers low-power modes to reduce current consumption. This supports networks with partially powered down nodes. To support software diagnostic functions, a CAN Receive-only Mode is implemented.

It is designed to provide excellent passive behavior when the transceiver is switched Off (mixed networks, clamp 15/30 applications).

A wake-up from the CAN Wake Capable Mode is possible via a message on the bus. Thus, the microcontroller can be powered down or idled and is woken up by the CAN bus activities.

The CAN transceiver is designed to withstand the severe conditions of automotive applications and to support 12V applications.

The transceiver can also be configured to Wake Capable in order to save current and to ensure a safe transition from Normal to Sleep Mode (to avoid losing messages).



High-Speed CAN FD Transceiver

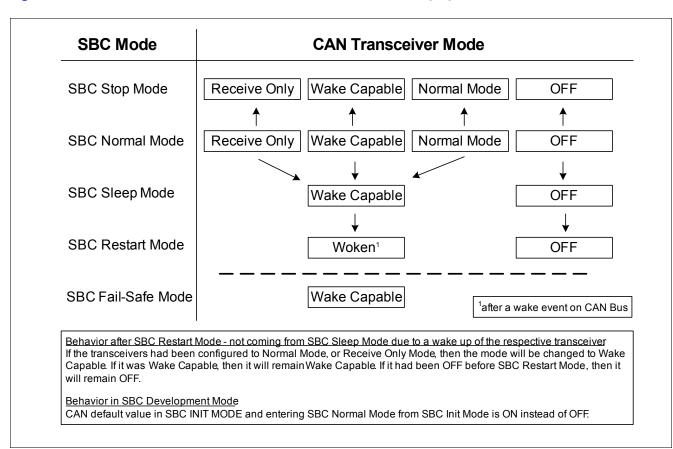


Figure 24 shows the possible transceiver mode transition when changing the SBC mode.

Figure 24 CAN Mode Control Diagram

CAN FD Support

CAN FD stands for 'CAN with Flexible Data Rate'. It is based on the well-established CAN protocol as specified in ISO 11898-1. CAN FD still uses the CAN bus arbitration method. The benefit is that the bit rate can be increased by switching to a shorter bit time at the end of the arbitration process and then to return to the longer bit time at the CRC delimiter, before the receivers transmit their acknowledge bits. See also **Figure 25**. In addition, the effective data rate is increased by allowing longer data fields. CAN FD allows the transmission of up to 64 data bytes compared to the 8 data bytes from the standard CAN.

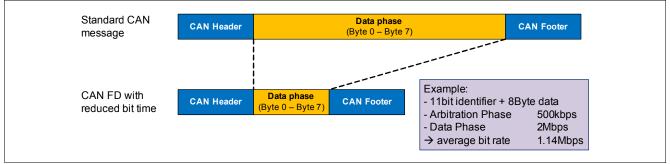


Figure 25 Bite Rate Increase with CAN FD vs. Standard CAN

Not only the physical layer must support CAN FD but also the CAN controller. In case the CAN controller is not able to support CAN FD then the respective CAN node must at least tolerate CAN FD communication. This CAN FD tolerant mode is realized in the physical layer.



8.2.1 CAN Off Mode

The CAN Off Mode is the default mode after power-up of the SBC. It is available in all SBC Modes and is intended to completely stop CAN activities or when CAN communication is not needed. In CAN Off Mode, a wake-up event on the bus is ignored.

8.2.2 CAN Normal Mode

The CAN Transceiver is enabled via SPI. CAN Normal Mode is designed for normal data transmission/reception within the HS CAN network. The Mode is available in SBC Normal Mode.

Transmission:

The signal from the microcontroller is applied to the TXDCAN input of the SBC. The bus driver switches the CANH/L output stages to transfer this input signal to the CAN bus lines.

Enabling sequence:

The CAN transceiver requires an enabling time $t_{CAN,EN}$ before a message can be sent on the bus. This means that the TXDCAN signal can only be pulled Low after the enabling time. If this is not ensured, then the TXDCAN needs to be set back to High (=recessive) until the enabling time is completed. Only the next dominant bit is transmitted on the bus. Figure 26 shows different scenarios and explanations for CAN enabling.

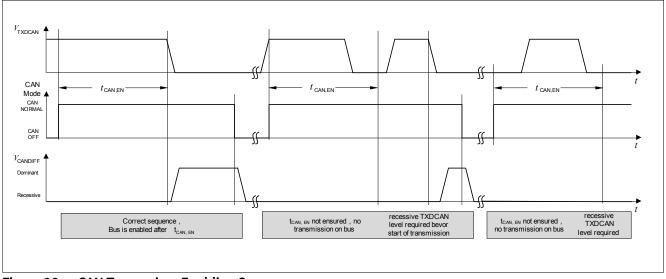


Figure 26 CAN Transceiver Enabling Sequence

Reduced Electromagnetic Emission:

To reduce electromagnetic emissions (EME), the bus driver controls CANH/L slopes symmetrically.

Reception:

Analog CAN bus signals are converted into digital signals at RXDCAN via the differential input receiver.



8.2.3 CAN Receive Only Mode

In CAN Receive Only Mode (RX only), the driver stage is de-activated but reception is still operational. This mode is accessible by an SPI command in SBC Normal Mode and in SBC Stop Mode.

8.2.4 CAN Wake Capable Mode

This mode can be used in SBC Stop, Sleep, Restart and Normal Mode by programming via SPI and it is used to monitor bus activities. It is automatically accessed in SBC Fail-Safe Mode. A wake-up signal on the bus results in a change of behavior of the SBC, as described in **Table 24**. As a signalization to the microcontroller, the RXDCAN pin is set Low and stays Low until the CAN transceiver is changed to any other mode. After a wake-up event, the transceiver can be switched to CAN Normal Mode via SPI for bus communication.

As shown in Figure 27, a wake-up pattern (WUP) is signalled on the bus by two consecutive dominant bus levels for at least t_{Wake1} (wake-up time) and less than t_{Wake2} , each separated by a recessive bus level of greater than t_{Wake1} and shorter than t_{Wake2} .

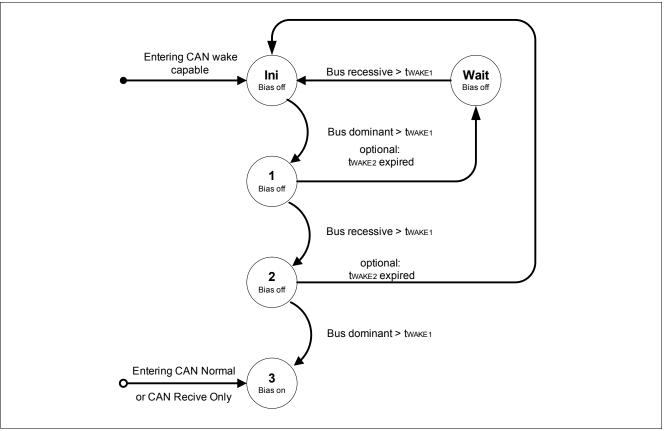


Figure 27 CAN Wake-up Pattern Detection according to the Definition in ISO 11898-2

Rearming the Transceiver for Wake Capability:

After a BUS wake-up event, the transceiver is woken. However, the **CAN** transceiver mode bits will still show Wake Capable (='01') so that the RXDCAN signal is pulled Low. There are two possibilities how the CAN transceiver's Wake Capable mode is enabled again after a wake-up event:

• The CAN transceiver mode must be toggled, i.e. switched from Wake Capable Mode to CAN Normal Mode, CAN Receive Only Mode or CAN Off, before switching to CAN Wake Capable Mode again.

74

Note: The transceiver is still properly working in Receive Only mode even if VCAN is not available because of an independent receiver supply.

TLE9461-3ES V33 Lite CAN SBC Family



High-Speed CAN FD Transceiver

• Rearming is done automatically when the SBC is changed to SBC Stop, SBC Sleep, or SBC Fail-Safe Mode to ensure wake-up capability.

Wake-Up in SBC Stop and Normal Mode:

In SBC Stop Mode, if a wake-up is detected, it is always signaled by the INTN output and in the WK_STAT_0 SPI register. It is also signaled by RXDCAN pulled to Low. The same applies for the SBC Normal Mode. The microcontroller needs to set the device from SBC Stop Mode to SBC Normal Mode, there is no automatic transition to Normal Mode.

For functional safety reasons, the watchdog is automatically enabled in SBC Stop Mode after a Bus wake-up event in case it was disabled before (if bit WD_EN_WK_BUS was configured to High before).

Wake-Up in SBC Sleep Mode:

Wake-up is possible via a CAN message. The wake-up automatically transfers the SBC into the SBC Restart Mode and from there to Normal Mode the corresponding RXDCAN pin is set to Low. The microcontroller is able to detect the Low signal on RXDCAN and to read the wake source out of the WK_STAT_0 register via SPI. No interrupt is generated when coming out of Sleep Mode. The microcontroller can now for example switch the CAN transceiver into CAN Normal Mode via SPI to start communication.

SBC Mode SBC Mode after Wake-up		VCC1	INTN	RXDCAN
Normal Mode	Normal Mode	On	Low	Low
Stop Mode	Stop Mode	On	Low	Low
Sleep Mode	Restart Mode	Ramping Up	High	Low
Restart Mode	Restart Mode	On	High	Low
Fail-Safe Mode	Restart Mode	Ramping Up	High	Low

Table 24 Action due to CAN Bus Wake-Up

8.2.5 CAN Bus termination

In accordance with the CAN configuration, four types of bus terminations are allowed:

- CAN Normal Mode: VCAN/2 termination;
- <u>CAN Receive Only Mode</u>: VCAN/2 termination in case that VCAN is nominal supply; when VCAN UV is detected, the termination is 2.5V;
- <u>CAN Wake Capable</u>: GND termination: after wake-up, the termination is 2.5V;
- <u>CAN Off</u>: no termination necessary (bus floating).

When entering CAN Wake Capable mode the termination is only connected to GND only after the t_silence time has expired.

8.2.6 TXD Time-out Feature

If the TXDCAN signal is dominant for a time $t > t_{TXDCAN_TO}$, in CAN Normal Mode, the TXDCAN time-out function deactivates the transmission of the signal at the bus setting the TXDCAN pin to recessive. This is implemented to prevent the bus from being blocked permanently due to an error. The transmitter is disabled and thus switched to recessive state. The CAN SPI control bits (CAN on BUS_CTRL_0) remain unchanged and the failure is stored in the SPI flag CAN_FAIL. The CAN transmitter stage is activated again after the dominant time-out condition is removed and the transceiver is automatically switched back to CAN Normal Mode.



8.2.7 Bus Dominant Clamping

If the HS CAN bus signal is dominant for a time $t > t_{BUS_CAN_TO}$, in CAN Normal and Receive Only Mode a bus dominant clamping is detected and the SPI bit CAN_FAIL is set. The transceiver configuration stays unchanged. In order to avoid that a bus dominant clamping is detected due to a TXD time-out the bus dominant clamping filter time $t_{BUS_CAN_TO} > t_{TXDCAN_TO}$.

8.2.8 Undervoltage Detection

The voltage at the CAN supply pin is monitored in CAN Normal and Receive Only Mode. In case of VCAN undervoltage a signalization via SPI bit VCAN_UV is triggered and the TLE9461-3ES V33 disables the transmitter stage. If the CAN supply reaches a higher level than the undervoltage detection threshold (VCAN > $V_{CAN_UV,r}$), the transceiver is automatically switched back to CAN Normal Mode.

The undervoltage detection is enabled if the mode bit CAN_1 = '1', i.e. in CAN Normal or CAN Receive Only Mode.



8.3 Electrical Characteristics

Table 25Electrical Characteristics

 $T_{\rm j}$ = -40°C to +150°C; $V_{\rm S}$ = 5.5 V to 28 V; $V_{\rm CAN}$ = 4.75 V to 5.25 V; RL = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin

Parameter	Symbol		Value	S	Unit	Note or Test Condition	Number	
		Min. Typ.		Max.				
CAN Bus Receiver								
Differential Receiver Threshold Voltage, recessive to dominant edge	V _{diff,rd_N}	-	0.80	0.90	V	$V_{diff} = V_{CANH} - V_{CANL;}$ -12V $\leq V_{CM}$ (CAN) \leq 12V; 0.9V $\leq V_{diff,D_{Range}} \leq$ 8V; CAN Normal Mode	P_9.3.2	
Differential Receiver Threshold Voltage, dominant to recessive edge	V _{diff,dr_N}	0.50	0.60	-	V	$V_{\text{diff}} = V_{\text{CANH}} - V_{\text{CANL}};$ -12V $\leq V_{\text{CM}}(\text{CAN}) \leq 12V;$ -3V $\leq V_{\text{diff},\text{D}_{\text{Range}}} \leq 0.5V;$ CAN Normal Mode	P_9.3.3	
Common Mode Range	CMR	-12	_	12	V	3)	P_9.3.4	
CANH, CANL Input Resistance	R _{in}	20	40	50	kΩ	CAN Normal / Wake Capable Mode; Recessive state; $-2 V \le V_{CANL/H} \le +7 V$	P_9.3.5	
Differential Input Resistance	R _{in_diff}	40	80	100	kΩ	CAN Normal / Wake Capable Mode; Recessive state; -2 V ≤ V _{CANL/H} ≤ +7 V	P_9.3.6	
Input Resistance Deviation between CANH and CANL	DR _i	-3	-	3	%	³⁾ Recessive state $V_{CANL} = V_{CANL/H} = 5V$	P_9.3.7	
Input Capacitance CANH, CANL versus GND	C _{in}	-	20	40	pF	$^{3)}V_{\text{TXDCAN}} = 5V$	P_9.3.8	
Differential Input Capacitance	C _{in_diff}	-	10	20	pF	$^{3)}V_{\text{TXDCAN}} = 5V$	P_9.3.9	
Wake-up Receiver Threshold Voltage, recessive to dominant edge	V _{diff} , rd_W	_	0.8	1.15	V	$\begin{array}{l} -12 V \leq V_{CM}(CAN) \leq 12 V; \\ 1.15 V \leq V_{diff, D_Range} \leq 8 V; \\ CAN Wake Capable \\ Mode \end{array}$	P_9.3.10	
Wake-up Receiver Threshold Voltage, dominant to recessive edge	V _{diff, dr_W}	0.4	0.7	-	V	$-12V \le V_{CM}(CAN) \le 12V;$ $-3V \le V_{diff,D_{Range}} \le 0.4V;$ CAN Wake Capable Mode	P_9.3.11	
CAN Bus Transmitter								
CANH/CANL Recessive Output Voltage (CAN Normal Mode)	V _{CANL/H_NM}	2.0	-	3.0	V	CAN Normal Mode $V_{TXDCAN} = V_{cc1};$ no load	P_9.3.12	



Table 25 Electrical Characteristics (cont'd)

 $T_{\rm j}$ = -40°C to +150°C; $V_{\rm S}$ = 5.5 V to 28 V; $V_{\rm CAN}$ = 4.75 V to 5.25 V; RL = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin

Parameter	Symbol		Values			Note or Test Condition	Number
		Min. Typ. Max.					
CANH/CANL Recessive Output Voltage (CAN Wake Capable Mode)	V _{CANL/H_LP}	-0.1	-	0.1	V	CAN Wake Capable Mode; V _{TXDCAN} = V _{cc1} ; no load	P_9.3.13
CANH, CANL Recessive Output Voltage Difference V _{diff} = V _{CANH} - V _{CANL} (CAN Normal Mode)	V _{diff_r_N}	-500	-	50	mV	CAN Normal Mode; V _{TXDCAN} = V _{cc1} ; no load	P_9.3.14
CANH, CANL Recessive Output Voltage Difference V _{diff} = V _{CANH} - V _{CANL} (CAN Wake Capable Mode)	V _{diff_r_W}	-200	-	50	mV	CAN Wake Capable Mode; V _{TXDCAN} = V _{cc1} ; no load	P_9.3.15
CANL Dominant Output Voltage	V _{canl}	0.5	-	2.25	V	CAN Normal Mode; $V_{TXDCAN} = 0V;$ $V_{CAN} = 5V;$ $50\Omega \le R_L \le 65\Omega$	P_9.3.16
CANH Dominant Output Voltage	V _{canh}	2.75	-	4.5	V	CAN Normal Mode; $V_{TXDCAN} = 0V;$ $V_{CAN} = 5V;$ $50\Omega \le R_L \le 65\Omega$	P_9.3.17
CANH, CANL Dominant Output Voltage Difference V _{diff} = V _{CANH} - V _{CANL}	V _{diff_d_N}	1.5	-	3.0	V	CAN Normal Mode; $V_{TXDCAN} = 0V;$ $V_{CAN} = 5V;$ $50\Omega \le R_L \le 65\Omega$	P_9.3.18
CANH, CANL Dominant Output Voltage Difference (resistance during arbitration) $V_{diff} = V_{CANL} - V_{CANL}$	V _{diff_d_N}	1.5	-	5.0	V	³⁾ CAN Normal Mode; $V_{TXDCAN} = 0V;$ $V_{CAN} = 5V;$ $R_{L} = 2240\Omega$	P_9.3.51
CANH, CANL Dominant Output Voltage Difference (extended bus load range) V _{diff} = V _{CANH} - V _{CANL}	V _{diff_d_N}	1.4	-	3.3	V	³⁾ CAN Normal Mode; $V_{TXDCAN} = 0V;$ $V_{CAN} = 5V;$ $45\Omega \le R_L \le 70\Omega$	P_9.3.52
Driver Symmetry V _{SYM} = V _{CANH} + V _{CANL}	V _{SYM}	4.5	-	5.5	V	¹⁾ CAN Normal Mode; $V_{TXDCAN} = 0V / 5V;$ $V_{CAN} = 5V;$ $C_{SPLIT} = 4.7nF;$ $50\Omega \le R_L \le 60\Omega;$	P_9.3.19



Table 25 Electrical Characteristics (cont'd)

 $T_{\rm j}$ = -40°C to +150°C; $V_{\rm S}$ = 5.5 V to 28 V; $V_{\rm CAN}$ = 4.75 V to 5.25 V; RL = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin

Parameter	Symbol		Values		Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
CANH Short Circuit Current (New ISO requirement)	I _{CANHsc}	-100	-80	-50	mA	CAN Normal Mode; V _{CANHshort} = -3 V; V _{CAN} = 5 V	P_9.3.20
CANL Short Circuit Current (New ISO requirement)	I _{CANLsc}	50	80	100	mA	CAN Normal Mode; V _{CANLshort} = 18 V; V _{CAN} = 5 V	P_9.3.21
Leakage Current	I _{CANH,Ik} I _{CANL,Ik}	-	2	5	μΑ	$V_{\rm S} = V_{\rm CAN} = 0V;$ $0V \le V_{\rm CANH,L} \le 5V;$ ${}^{2)}R_{\rm test} = 0 / 47k\Omega$	P_9.3.22
Receiver Output RXDCAN		1	_1		4		1
High-level Output Voltage	V _{RXDCAN,H}	0.8× V _{CC1}	-	-	V	CAN Normal Mode; / _{RXDCAN} = -2 mA	P_9.3.23
Low-level Output Voltage	V _{RXDCAN,L}	-	-	0.2 × V _{cc1}	V	CAN Normal Mode; / _{RXDCAN} = 2 mA	P_9.3.24
Transmission Input TXDCAN							
High-level Input Voltage Threshold	V _{TXDCAN,H}	-	-	0.7 × V _{cc1}	V	CAN Normal Mode; recessive state	P_9.3.25
Low-level Input Voltage Threshold	V _{TXDCAN,L}	0.3× V _{cc1}	-	-	V	CAN Normal Mode; dominant state	P_9.3.26
TXDCAN Input Hysteresis	V _{TXDCAN,hys}	0.08 × V _{cc1}	0.12 × V _{cc1}	0.4 × V _{cc1}	mV	3)	P_9.3.27
TXDCAN Pull-up Resistance	R _{TXDCAN}	25	40	75	kΩ	-	P_9.3.28
CAN Transceiver Enabling Time	t _{can,en}	8	12	18	μs	⁷⁾ CSN = High to first valid transmitted TXDCAN dominant	P_9.3.29
Dynamic CAN-Transceiver C	haracteristics	5					
Min. Dominant Time for Bus Wake-up	t _{Wake1}	0.5	1.2	1.8	μs	-12V ≤ V _{CM} (CAN) ≤ 12V; CAN Wake Capable Mode	P_9.3.53
Wake-up Time-out, Recessive Bus	t _{Wake2}	0.8	-	10	ms	⁷⁾ CAN Wake Capable Mode	P_9.3.31
Wake-up reaction time (WUP or WUF)	t _{wu_wup/wuf}	-	-	100	μs	⁷⁾⁴⁾⁵⁾ Wake-up reaction time after a valid WUP or WUF;	P_9.3.54
Loop delay (recessive to dominant)	t _{loop,f}	-	150	255	ns	¹⁾ CAN Normal Mode; $C_{L} = 100 \text{pF};$ $R_{L} = 60 \Omega;$ $V_{CAN} = 5V;$ $C_{RXDCAN} = 15 \text{ pF}$	P_9.3.32



Table 25Electrical Characteristics (cont'd)

 $T_{\rm j}$ = -40°C to +150°C; $V_{\rm S}$ = 5.5 V to 28 V; $V_{\rm CAN}$ = 4.75 V to 5.25 V; RL = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin

Parameter	Symbol		Values			Note or Test Condition	Number
		Min.	Тур.	Max.			
Loop delay (dominant to recessive)	t _{LOOP,r}	-	150	255	ns	¹⁾ CAN Normal Mode; $C_{L} = 100 \text{pF};$ $R_{L} = 60 \Omega;$ $V_{CAN} = 5V;$ $C_{RXDCAN} = 15 \text{ pF}$	P_9.3.33
Propagation Delay TXDCAN Low to bus dominant	<i>t</i> _{d(L),T}	-	90	140	ns	CAN Normal Mode; $C_{L} = 100 \text{pF};$ $R_{L} = 60 \Omega;$ $V_{CAN} = 5V$	P_9.3.34
Propagation Delay TXDCAN High to bus recessive	t _{d(H),T}	-	100	140	ns	CAN Normal Mode; $C_{L} = 100 \text{pF};$ $R_{L} = 60 \Omega;$ $V_{CAN} = 5V$	P_9.3.35
Propagation Delay bus dominant to RXDCAN Low	$t_{\rm d(L),R}$	_	100	-	ns	CAN Normal Mode; $C_L = 100 \text{pF};$ $R_L = 60 \Omega;$ $V_{CAN} = 5V;$ $C_{RXDCAN} = 15 \text{ pF}$	P_9.3.36
Propagation Delay bus recessive to RXDCAN High	t _{d(H),R}	_	100	_	ns	CAN Normal Mode; $C_L = 100 \text{pF};$ $R_L = 60 \Omega;$ $V_{CAN} = 5V;$ $C_{RXDCAN} = 15 \text{ pF}$	P_9.3.37
Received Recessive bit width (CAN FD up to 2Mbps)	t _{bit(RXD)}	400	-	550	ns	CAN Normal Mode; $C_L = 100 \text{pF};$ $R_L = 60\Omega;$ $V_{CAN} = 5V;$ $C_{RXD} = 15 \text{pF};$ $t_{\text{bit(TXD)}} = 500 \text{ns};$ Parameter definition in according to Figure 29.	P_9.3.38
Transmitted Recessive bit width (CAN FD up to 2Mbps)	t _{bit(BUS)}	435	-	530	ns	CAN Normal Mode; $C_{L} = 100 \text{pF};$ $R_{L} = 60 \Omega;$ $V_{CAN} = 5 \text{V};$ $C_{RXD} = 15 \text{pF};$ $t_{\text{bit(TXD)}} = 500 \text{ns};$ Parameter definition in according to Figure 29.	P_9.3.43



Table 25Electrical Characteristics (cont'd)

 $T_{\rm j}$ = -40°C to +150°C; $V_{\rm S}$ = 5.5 V to 28 V; $V_{\rm CAN}$ = 4.75 V to 5.25 V; RL = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter Symbol Values Unit Note or Test Condition Number Min. Тур. Max. ⁶⁾ CAN Normal Mode; $\Delta t_{\rm Rec}$ -65 40 Receiver timing symmetry _ ns P_9.3.44 $C_{1} = 100 \text{pF};$ (CAN FD up to 2Mbps) $R_1 = 60\Omega;$ $V_{CAN} = 5V;$ $C_{\rm RXD} = 15 \rm pF;$ $t_{\rm bit(TXD)} = 500$ ns; Parameter definition in according to Figure 29. **Received Recessive bit** 120 220 CAN Normal Mode; P_9.3.45 $t_{\rm bit(RXD)}$ ns width $C_{\rm I} = 100 {\rm pF};$ $R_{\rm I} = 60\Omega$; (CAN FD up to 5Mbps) $V_{\rm CAN} = 5V;$ $C_{\text{RXD}} = 15 \text{pF};$ $t_{\rm bit(TXD)} = 200$ ns; Parameter definition in according to Figure 29. **Transmitted Recessive bit** 210 CAN Normal Mode; $t_{\rm bit(BUS)}$ 155 ns P_9.3.46 width $C_1 = 100 \text{pF};$ (CAN FD up to 5Mbps) $R_{\rm L} = 60 \ \Omega;$ $V_{CAN} = 5 V;$ $C_{\text{RXD}} = 15 \text{ pF};$ $t_{\rm bit(TXD)} = 200 \, \rm ns;$ Parameter definition in according to Figure 29. $\Delta t_{\rm Rec}$ 15 CAN Normal Mode; P_9.3.47 Receiver timing symmetry -45 ns _ (CAN FD up to 5Mbps) $C_{\rm L} = 100 {\rm pF};$ $R_1 = 60\Omega;$ $V_{\rm CAN} = 5V;$ $C_{\text{RXD}} = 15 \text{pF};$ $t_{\rm bit(TXD)} = 200$ ns; Parameter definition in according to Figure 29. ⁷⁾CAN Normal Mode **TXDCAN** Permanent 2.0 2.4 P_9.3.39 1.6 ms $t_{\text{TXDCAN TO}}$ **Dominant Time-out BUS Permanent Dominant** 2.0 2.5 3.0 ⁷⁾CAN Normal Mode P_9.3.40 ms t_{BUS CAN TO} Time-out



Table 25 Electrical Characteristics (cont'd)

 T_j = -40°C to +150°C; V_s = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω ; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin

(unless otherwise specified)

Parameter	Symbol	Values		Unit	Note or Test Condition	Number	
		Min.	Тур.	Max.			
Timeout for bus inactivity	t _{SILENCE}	0.6	_	1.2	S	7)	P_9.3.48
Bus Bias reaction time	t _{Bias}	_	_	250	μs	7)	P_9.3.49

V_{SYM} shall be observed during dominant and recessive state and also during the transition dominant to recessive and vice versa while TXD is simulated by a square signal (50% duty cycle) with a frequency of up to 1 MHz (2 MBit/s);

- 2) R_{test} between (Vs /VCAN) and 0V (GND);
- 3) Not subject to production test, specified by design;
- 4) Wake-up is signalized via INTN pin activation in SBC Stop Mode and via VCC1 ramping up with wake from SBC Sleep Mode;
- 5) For WUP: time starts with end of last dominant phase of WUP; for WUF: time starts with end of CRC delimiter of the WUF
- 6) $\Delta t_{\text{Rec}} = t_{\text{bit}(\text{RXD})} t_{\text{bit}(\text{BUS})}$.
- 7) Not subject to production test, tolerance defined by internal oscillator tolerance.

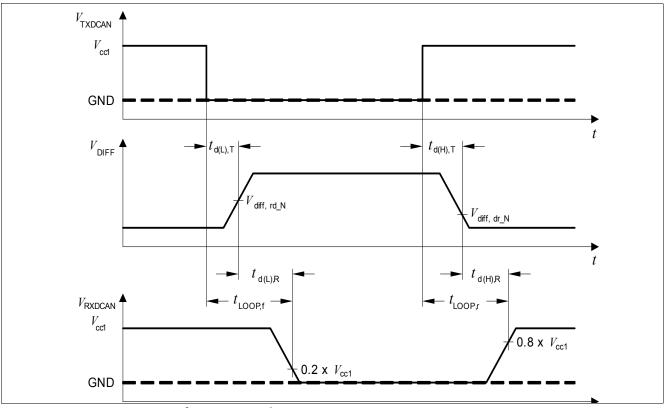


Figure 28 Timing Diagrams for Dynamic Characteristics

TLE9461-3ES V33 Lite CAN SBC Family



High-Speed CAN FD Transceiver

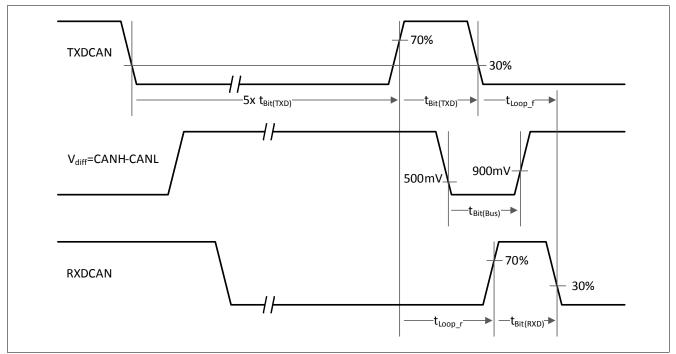


Figure 29 From ISO 11898-2: tloop, tbit(TXD), tbit(Bus), tbit(RXD) definitions

TLE9461-3ES V33 Lite CAN SBC Family



High-Voltage Wake and Voltage Monitoring Input

9 High-Voltage Wake and Voltage Monitoring Input

9.1 Block Description

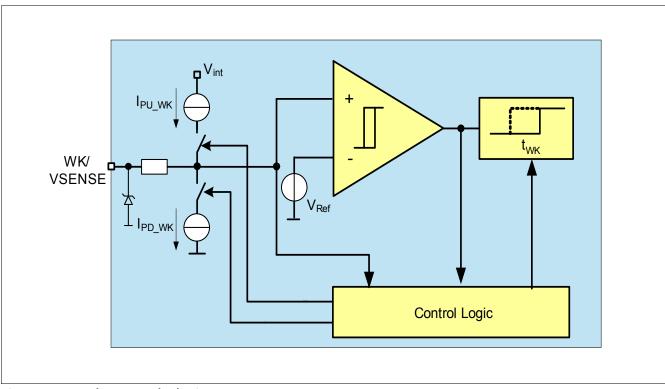


Figure 30 Wake Input Block Diagram

Features

- High-Voltage input with a 3V (typ.) threshold voltage
- Alternate measurement feature for high-voltage sensing via pins WK/SENSE and FO/GPIO
- Wake-up capability for power saving modes
- Edge sensitive wake-up feature Low to High and High to Low
- Pull-up and Pull-down current sources, configurable via SPI
- Selectable configuration for Static Sense or cyclic sense working with TIMER
- In SBC Normal and SBC Stop Mode the level of the WK pin can be read via SPI



9.2 High-Voltage Wake Function

9.2.1 Functional Description

The wake input pin is edge-sensitive inputs with a switching threshold of typically 3V. Both transitions, High to Low and Low to High, result in a signalization by the SBC. The signalization occurs either by triggering the interrupt in SBC Normal Mode and SBC Stop Mode or by a wake-up of the device in SBC Sleep and SBC Fail-Safe Mode.

Two different wake-up detection modes can be selected via SPI:

- Static Sense: WK inputs are always active
- Cyclic Sense: WK inputs are only active for a certain time period (see Chapter 5.2.1)

A filter time of 16µs is implemented to avoid an unintentional wake-up due to transients or EMI disturbances in Static Sense configuration.

The filter time (t_{FWK1}) is triggered by a level change crossing the switching threshold and a wake signal is recognized if the input level does not cross again the threshold during the selected filter time.

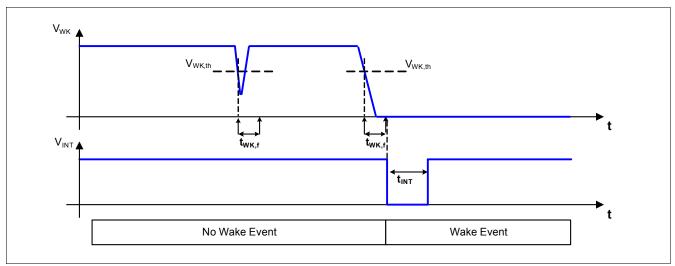


Figure 31 shows a typical wake-up timing and filtering of transient pulses.

Figure 31 Wake-up Filter Timing for Static Sense

The wake-up capability of the WK pin can be enabled or disabled via SPI command in the WK_CTRL_1 register. A wake-up event via the WK pin can always be read in the register WK_STAT_0 at the bit WK_WU.

The actual voltage level of the WK pin (Low or High) can always be read in SBC Normal and SBC Stop-, and Init Mode in the register WK_LVL_STAT. During Cyclic Sense, the register shows the sampled levels of the respective WK pin.

If FO/GPIO is configured as WK input in its alternative function (16µs static filter time), then the wake-up events are signalled in the register WK_STAT_1.



9.2.2 Wake Input Configuration

To ensure a defined and stable voltage levels at the internal comparator input it is possible to configure integrated current sources via the SPI register WK_PUPD_CTRL. An example illustration for the automatic switching configuration is shown in Figure 32.

Table 26	Pull-Up	/ Pull-Down	Resistor
----------	---------	-------------	----------

WKx_PUPD_	WKx_PUPD_	Current Sources	Note
1	0		
0	0	no current source	WK input is floating if left open (default setting)
0	1	pull-down	WK input internally pulled to GND
1	0	pull-up	WK input internally pulled to internal 5V supply
1	1	Automatic switching	If a High level is detected at the WK input the pull-up source is activated, if Low level is detected the pull down is activated.

Note: If there is no pull-up or pull-down configured on the WK input, then the respective input should be tied to GND or VS on board to avoid unintended floating of the pin and subsequent wake-up events.

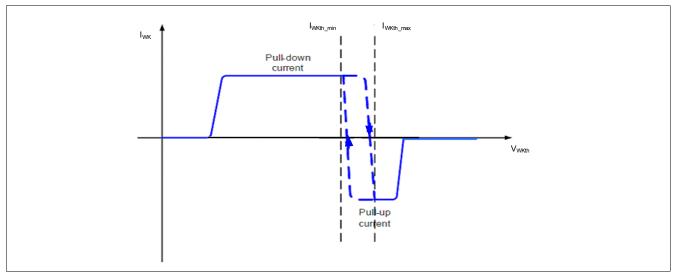


Figure 32 Illustration for Pull-Up / Down Current Sources with Automatic Switching Configuration



9.2.3 Wake configuration for Cyclic Sense

The wake input pin can also be used for cyclical sensing of monitoring signals during low-power modes. For this function the WK input performs a cyclic sensing of the voltage level during the On-time of the GPIO HS. A transition of the voltage level triggers a wake-up event.

In order to enable this functionality the GPIO must be configured as HS to be controlled by the Timer. See also **Chapter 5.2.1** and **Chapter 11.1.2** for more details.

9.2.4 High-Voltage Sensing as Alternate Function

This function provides the possibility to measure a voltage, e.g. the unbuffered battery voltage, with the protected WK HV-input pin. The measured voltage is routed out at FO/GPIO.

If this function is enabled with the WK_MEAS then neither the FO (including the FO test via FO_ON), nor the GPIO functionality nor the WK functionality are available.

If the measurement function is enabled then following items should be noted:

- The internal pull-up / pull-down structures are disabled and the internal WK signal is gated (blocked)
- The settings for WK in the registers WK_PUPD_CTRL and WK_CTRL_1 are ignored (but changing the settings is not prevented)
- The wake capability and voltage monitoring of the WK pin is disabled, i.e. WK_STAT_0 and WK_LVL_STAT are not updated, i.e. the bits in WK_LVL_STAT are cleared
- If WK is the only valid wake source then the SPI_FAIL flag is set when trying to enter SBC Sleep Mode (see also Chapter 5.1) and SBC Restart Mode is entered

Please refer to **Chapter 5.4** for more details on the functionality of the measurement unit.



9.3 Electrical Characteristics

Table 27 Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note or	Number	
		Min.	Тур.	Max.		Test Condition	
WK Input Pin Character	istics		I	U	-	<u>.</u>	ľ
Wake-up/monitoring threshold voltage	V _{WKth}	2	3	4	V	without external serial resistor R _S (with R _S : DeltaV = I _{PD/PU} × R _S); hysteresis included	P_10.3.1
Threshold hysteresis	V _{WKNth,hys}	0.1	-	0.7	V	without external serial resistor R _s (with R _s : DeltaV = I _{PD/PU} × R _s)	P_10.3.2
WK pin Pull-up Current	I _{PU_WK}	-20	-10	-3	μA	$V_{\rm WK_{-IN}} = 4V$	P_10.3.3
WK pin Pull-down Current	I _{PD_WK}	3	10	20	μA	$V_{\rm WK_{IN}} = 2V$	P_10.3.4
Input leakage current	I _{LK,I}	-2		2	μA	0 V < V _{WK_IN} < 40V	P_10.3.5
Timing							
Wake-up filter time 1	t _{FWK1}	13	16	20	μs	1)	P_10.3.6
	1	i			1	I	1

1) Not subject to production test, tolerance defined by internal oscillator tolerance



Interrupt Function

10 Interrupt Function

10.1 Block and Functional Description

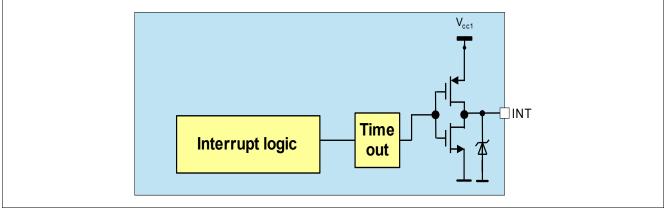


Figure 33 Interrupt Block Diagram

The interrupt is used to signalize special events in real time to the microcontroller. The interrupt block is designed as a push/pull output stage as shown in Figure 33. An interrupt is triggered and the INTN pin is pulled Low (active Low) for t_{INTN} in SBC Normal and Stop Mode and it is released once t_{INTN} is expired. The minimum High-time of INTN between two consecutive interrupts is t_{INTND} . An interrupt does not cause a SBC mode change.

Two different interrupt classes could be selected via the SPI bit INT_ GLOBAL:

 Class 1 (wake interrupt - INT_ GLOBAL=0): all wake-up events stored in the wake status SPI registers (WK_STAT_0 and WK_STAT_1 if GPIO is configured as WK) cause an interrupt. The wake sources are listed below.

An interrupt is only triggered if the respective function is also enabled as a wake source (including GPIOx if configured as a wake input). The CAN time out signalization CANTO is also considered as a wake source. Therefore, the interrupt mask bit CANTO_MASK has higher priority than the bit INT_GLOBAL, i.e. the bit is not taken into account for CANTO.

- via CAN (wake-up or CAN Bus time out)
- via the WK pin
- via TIMER
- via GPIO (if configured as WK input)
- Class 2 (global interrupt INT_ GLOBAL=1): in addition to the wake-up events, all signalled failures stored in the other status registers trigger an interrupt (the registers WK_LVL_STAT and FAM_PROD_STAT are not generating interrupts, neither will the selective wake registers SWK_STAT, SWK_OSC_CAL_H_STAT, SWK_OSC_CAL_L_STAT, SWK_ECNT_STAT, SWK_CDR_CTRL1, SWK_CDR_CTRL2)
- Note: The errors that cause SBC Restart or SBC Fail-Safe Mode (VCC1_UV, WD_FAIL, VCC1_SC, TSD2_SAFE, TSD2, FAILURE) are the exceptions of an INTN generation on status bits. Also the bits POR and DEV_STAT_[1:0] will not generate interrupts.
- *Note:* During SBC Restart Mode the SPI is blocked and the microcontroller is in reset. Therefore the INTN is not activated in SBC Restart Mode, which is the same behavior in SBC-Fail-Safe or Sleep Mode.



Interrupt Function

In addition to this behavior, INTN is triggered when SBC Stop Mode is entered and not all wake source bits were cleared in the WK_STAT_0 and WK_STAT_1 register.

The SPI status registers are updated at every falling edge of the INTN pulse. All interrupt events are stored in the respective register (except the register WK_LVL_STAT) until the register is read and cleared via SPI command. A second SPI read after reading out the respective status register is optional but recommended to verify that the interrupt event is not present anymore. The interrupt behavior is shown in Figure 34 for class 1 interrupts. The behavior for class 2 is identical.

The INTN pin is also used during SBC Init Mode to select the hardware configuration of the device. See **Chapter 5.1.1** for further information.

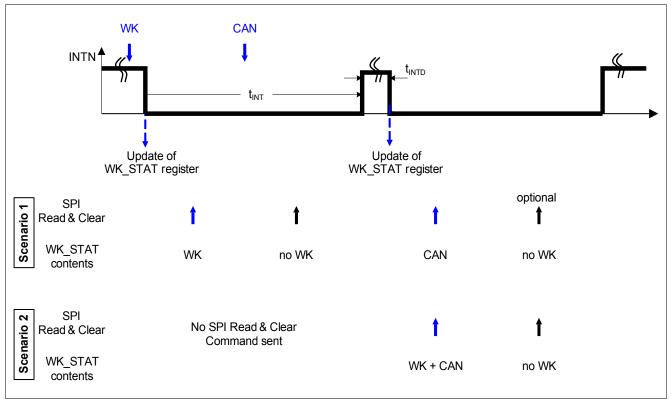


Figure 34 Interrupt Signalization Behavior

Interrupt Function



10.2 Electrical Characteristics

Table 28Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol		Value	S	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Interrupt Output; Pin INTN							·
INTN High Output Voltage	V _{intn,H}	0.8 × V _{CC1}	-	-	V	$^{1)}I_{INTN} = -1 \text{ mA};$ INTN = Off	P_11.2.1
INTN Low Output Voltage	V _{intn,L}	-	-	0.2 × V _{CC1}	V	$^{1)}I_{INTN} = 1 \text{ mA};$ INTN = On	P_11.2.2
INTN Pulse Width	t _{INTN}	80	100	120	μs	2)	P_11.2.3
INTN Pulse Minimum Delay Time	t _{intnd}	80	100	120	μs	²⁾ between consecutive pulses	P_11.2.4
Configuration Select; Pin II	NTN						
Config Pull-down Resistance	R _{CFG}	150	250	320	kΩ	<i>V</i> _{INTN} = 3.3 V	P_11.2.5
Config Select Filter Time	t _{CFG_F}	5	10	14	μs	2)	P_11.2.6

1) Output Voltage Value also determines device configuration during SBC Init Mode

2) Not subject to production test, tolerance defined by internal oscillator tolerance.



11 Fail Output (FO) and General Purpose I/O (GPIO)

11.1 Block and Functional Description

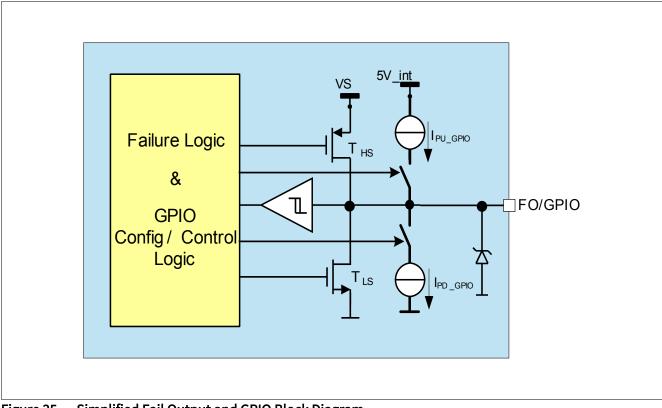


Figure 35 Simplified Fail Output and GPIO Block Diagram

Features

- Fail-Output Function to signalize fail-safe events (FO function)
- General Purpose I/O functionality in case the fail-output function is not needed (GPIO function)
- Output of HV Measurement function in case WK/SENSE is selected accordingly (WK_MEAS)



11.1.1 Fail-Output Function

The fail output consists of a failure logic and an open-drain output (FO) with active-low signalization. It is the default configuration after device power-up to support fail-safe functions.

The fail output is activated due to following failure conditions:

- Watchdog trigger failure (For config 3&4 only after the 2nd watchdog trigger failure and for config 1&2 after 1st watchdog trigger failure)
- Thermal shutdown TSD2
- VCC1 short to GND
- VCC1 over voltage (only if the SPI bit VCC1_OV_RST is set)

If FO is triggered, the SBC Fail-Safe Mode is entered (exceptions are watchdog trigger failures depending on selected configurations - see **Chapter 5.1.1**). The fail output activation is signalled in the SPI bit **FAILURE** of the register **DEV_STAT**.

The entry of SBC Fail-Safe Mode due to a watchdog failure can be configured as described in **Chapter 5.1.1**. If the FO was activated due to a failure then it stays activated (pulled Low) in all SBC Modes.

In order to deactivate the fail output in SBC Normal Mode the failure conditions must not be present anymore (e.g. TSD2, VCC1 short circuit, VCC1 over voltage - independent of the VCC1_OV_RST, etc) and the bit FAILURE must be cleared via SPI command. In case of a FAILURE bit is set due to a watchdog fail, a successful WD trigger is needed in addition, i.e. WD_FAIL must be cleared. WD_FAIL is also cleared when going to SBC Sleep or SBC Fail-Safe Mode due to another failure (not a WD failure) or if the watchdog is disabled in SBC Stop Mode.

For testing purposes only the Fail Output can be activated via SPI by setting the bit **FO_ON**. This bit is independent of the FO failure bits. In case there is no failure condition, the FO output can also be turned Off again via SPI, i.e. no successful watchdog trigger is needed.

In case FO was activated via the SPI bit FO_ON it is disabled when entering SBC Restart Mode and stays Off in SBC Normal Mode.

Note: The Fail output pin is triggered for any of the above described failures.

Note: The bit FO_ON can be written in any GPIO configuration. However, the fail-output pin FO/GPIO is only activated if GPIO is configured as FO, i.e. the bit is ignored for any other GPIO configuration.



11.1.2 General Purpose I/O Function as Alternate Function

In case the FO functionality is not used, the pin can be configured with an alternate function as high-voltage (VS related) General Purpose I/O pin via the SPI bits GPIO.

To avoid unintentional changes of the respective GPIO function during operation the configuration can be locked via the SPI bit CFG_LOCK_0

FO/GPIO can be reconfigured in SBC Normal Mode for the following functions:

- FO functionality (default state) when configured as GPIO ='000'...'010':
 - Overcurrent shutdown and open load detection is disabled
- Off (also disabled in case FO1 is activated) when configured as GPIO ='100'
- Wake Input when configured as GPIO='101':
 - There is a blanking time t_{GPIO,WK,blank} when FO/GPIO is configured as wake input. Only then the level detection becomes valid, i.e. the filter time t_{FWK1} is started.
 - The pin can be used as a wake source. A level change is detected at the threshold V_{GPIOI,th}.
 The wake capability can be enabled and disabled by setting the GPIO bits. Once configured as wake input it is automatically wake capable.
 - wake-up events are stored and reported in WK_STAT_1; the bit GPIO_WK_WU is cleared when SBC Fail-Safe Mode is entered.
 - Internal pull-up or pull-down structures are implemented and can be configured with the SPI bits GPIO_WK_PUPD.
 - SBC Normal, Stop-, Init and Restart Mode: The input level is shown in the WK_LVL_STAT register
 - SBC Normal and Stop Mode: INTN is triggered in case of a qualified edge change.
 - SBC Restart Mode: The SPI is blocked and cannot be read; INTN is not triggered but GPIO_WK_WU is set.
 - SBC Sleep Mode: The device is woken in case of a qualified edge change, i.e. VCC1 is enabled.
 WK_LVL_STAT is updated during SBC Sleep and Fail-Safe Mode but it can only be read when entering SBC Normal Mode again.
- Low-Side incl. PWM control when configured as GPIO ='110':
 - The switch is controlled by the PWM generator: 0% DC = Off and 100% DC = On; any other duty cycle can be configured in PWM_CTRL.

The PWM frequency can be selected in PWM_FREQ_CTRL

- The respective level at the pin is shown in WK_LVL_STAT in SBC Normal, Stop-, Init and Restart Mode and can serve as a feedback about the respective switch state¹⁾
- On-state overcurrent shutdown is implemented.
 In PWM operation the diagnosis is active only during the LS On-time.
 The bit GPIO_OC shows an over current shutdown respectively and the switch is disabled.
 Depending on the duty cycle the diagnosis might not be activated considering the respective filter timing.
- High-Side incl. PWM control when configured as GPIO ='111':

¹⁾ The level is determined by the wake comparator and is shown as Low or High, i.e. the feature might not be useful if a duty cycle of 0% < DC < 100% is applied

TLE9461-3ES V33 Lite CAN SBC Family



Fail Output (FO) and General Purpose I/O (GPIO)

 The switch is controlled by the PWM generator: 0% DC = Off and 100% DC = On; any other duty cycle can be configured in PWM_CTRL.

The PWM frequency can be selected in PWM_FREQ_CTRL

- The respective level at the pin is shown in WK_LVL_STAT in SBC Normal, Stop-, Init and Restart Mode and can serve as a feedback about the respective switch state¹⁾
- On-state open load detection and overcurrent shutdown is implemented.
 During PWM operation the diagnosis is active only during the HS On-time.
 In case of open load detection the bit GPIO_OL is set.
 In case of over current detection the bit GPIO_OC is set and the switch is shut down.
 Depending on the duty cycle the diagnosis might not be activated considering the respective filter time
- High-Side with Cyclic Sense functionality when configured as GPIO = '011':
 - The HS is used in combination with the WK pin and is controlled by the Timer. Cyclic Sense does not work if the GPIO is not configured accordingly.
 - The configuration for Cyclic Sense, e.g. the period and On-time of the Cyclic Sense function is done via the registers TIMER_CTRL, WK_CTRL_1, WK_PUPD_CTRL
 - A learning cycle is always started if the timer is started via the On-time and GPIO is configured as HS with Cyclic Sense = '011'
 - Overcurrent shutdown is active only during the HS On-time: In case of over current detection the bit GPIO_OC is set and the switch is shut down. The timer keeps running, i.e. Cyclic Wake is still available. The open load detection is not available in this configuration.
 - WK_LVL_STAT is not updated
 - See Chapter 5.2.1 and Chapter 9.2 for more information about Cyclic Sense
- *Note:* It must be ensured that the correct GPIO configuration is selected after device power-up to ensure proper functionality.

It is recommended to use the CFG_LOCK_0 bit to avoid unintentional configuration changes. It is not recommended to change the GPIO configuration during the operation to avoid misleading SPI status bit settings (e.g. wake-up event, over current, open load) or unexpected timings due to shared PWM generator.

Note: Before GPIO is be configured as HS or LS with PWM Control the PWM_CTRL register must be set .

Note: The internally stored default value used for the wake-input configuration is 'Low'. A level change is signalized via the bit GPIO_WK_WU in case the externally connected signal on FO/GPIO is 'High'. If there is a level change at the FO/GPIO pin while configuring the wake function then a wake-up event can occur as there is no internal learning cycle and the last filtered value is used as a reference.

Shutdown behavior in case of low-side or high-side configuration (incl. Cyclic Sense & PWM):

- The switch is disabled in case of over current detection with low- or high-side configuration, SBC Restart or Fail-Safe Mode entry
- The SPI bits are set to GPIO = Off = '100'
- The switch stays Off until it is enabled again via the GPIO bits,
- In case CFG_LOCK_0 is set, then the bit must first be cleared before the configuration can be enabled again. Then the lock bit should be set again
- The switch can be enabled even if GPIO_OL or GPIO_OC bit is set.

TLE9461-3ES V33 Lite CAN SBC Family



Fail Output (FO) and General Purpose I/O (GPIO)

- A VS_UV condition is not affecting the behavior of the GPIO.
- *Note:* After a short-circuit event for either low-side or high-side configuration a minimum recovery time of 25us must be ensured before enabling the respective function again!
- Note: If FO is not enabled then FO/GPIO is also not activated in case of failures. Also the FAILURE bit is set but it can be cleared. In addition, it is not possible to activate FO/GPIO via FO_ON in this case.

Restart and Soft-Reset Behavior:

The behavior during SBC Restart and Fail-Safe Mode as well as the transition to SBC Normal Mode is as follows:

- if configured as Wake Input: it will stay wake capable during SBC Restart Mode and is an automatic wake source in SBC Fail-Safe Mode. WK_LVL_STAT is updated but it can only be read when entering again SBC Normal Mode.
- if configured as Low-Side or High-Side: The switch is disabled during SBC Restart and Fail-Safe Mode. They stay Off when returning to SBC Normal Mode and can be enabled again via SPI (Restart value is 'Off').
- if configured as FO and activated due to a failure: FO stays activated during SBC Restart Mode and when entering SBC Normal Mode (SPI register is not modified).
- In case of a SBC Soft Reset command the GPIO configuration remains unchanged if CFG_LOCK_0 is set but the settings for Timer and PWM register are reset.

The detailed behavior for the respective configurations and SBC modes is listed in below table:

FO Configuration	SBC Normal Mode	SBC Stop Mode	SBC Sleep Mode	SBC Restart Mode	SBC Fail-Safe Mode
FO (default)		fixed	fixed	active / fixed	active
Off		Off	Off	Off	Off
Wake Input	configurable	wake capable	wake capable	wake capable	wake capable
Low-Side	_	fixed	fixed	Off	Off
High-Side	_	fixed	fixed	Off	Off

 Table 29
 Fail-Output and GPIO configuration behavior during the respective SBC Modes

Note: Above mentioned behavior also applies to the PWM operation for LS and HS and for HS Cyclic Sense function.

Explanation of GPIO states:

- configurable: settings can be changed in this SBC mode
- fixed: settings stay as configured in SBC Normal Mode
- active: FO is activated due to a failure leading to SBC Restart or Fail-Safe Mode.



11.1.3 WK and FO/GPIO HV-Sensing Function as Alternative Function

This function provides the possibility to measure a voltage, e.g. the unbuffered battery voltage, with the protected WK HV-input. The measured voltage is routed out at FO/GPIO.

If this function is enabled with the WK_MEAS then neither the FO (including the FO test via FO_ON) nor the GPIO functionality is available. Trying to enable the FO/GPIO functionality sets the SPI_FAIL flag.

If the measurement function is enabled the following items must be noted:

- The internal pull-up / pull-down structures are disabled and the internal WK signal is gated (blocked)
- The register WK_PUPD_CTRL can be modified but functionality changes are ignored. The GPIO_CTRL cannot be modified while WK_MEAS = '1'. WK_MEAS cannot be set if FO is configured. In this case SPI_FAIL is set.

FO must be set to Off first.

- The wake capability and voltage monitoring of the WK pin is disabled, i.e. WK_STAT_1 and WK_LVL_STAT are not updated
- If GPIO WK is the only valid wake source then the SPI_FAIL flag is set when trying to enter SBC Sleep Mode (see also Chapter 5.1) and SBC Restart Mode is entered

Please refer to Chapter 5.4 for more details on the functionality of the measurement unit.



11.2 Electrical Characteristics

Table 30 Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

Parameter	Symbol	Values			Unit	Note or	Number
		Min. Typ.		Max.		Test Condition	
FO and Alternative Func	tion GPIO						
FO Low-Side output voltage (active)	V _{FO,L1}	-	-	1	V	If configured as Fail- Output; I _{FO} = 4.0mA	P_12.2.1
GPIO Low-Side output voltage (active)	V _{GPIOL,L1}	_	-	1	V	If configured as Low- Side Switch I _{GPIO} = 30mA	P_12.2.3
GPIO Low-Side output voltage (active)	V _{GPIOL,L2}	_	-	5	mV	¹⁾ If configured as Low-Side Switch; I _{GPIO} = 100μA	P_12.2.4
GPIO High-Side output voltage (active)	V _{GPIOH,H1}	VS-1	-	-	V	If configured as High- Side Switch; I _{GPO} = -30mA	P_12.2.5
GPIO High-Side output voltage (active)	V _{GPIOH,H2}	VS-5	-	-	mV	¹⁾ If configured as High-Side Switch; I _{GPO} = -100μA	P_12.2.6
GPIO input threshold voltage (WK config)	V _{GPIOI,th}	1.5	2.5	3.5	V	hysteresis included; pull-up / pull-down sources disabled	P_12.2.7
GPIO input threshold hysteresis (WK config)	V _{GPIOI,hys}	0.6	0.9	1.3	V	¹⁾ pull-up / pull-down sources disabled	P_12.2.8
GPIO input filter time (WK config)	t _{F_GPIO_WK}	13	16	20	μs	2)	P_12.2.19
FO/GPIO input leakage current (all inactive)	I _{GPIO,LK}	-2	-	2	μA	0V < V _{GPIO} < VS	P_12.2.9
GPIO wake input activation blanking time	t _{GPIO,WK,blank}	24	30	40	μs	²⁾ after enabling as wake input	P_12.2.10
GPIO LS overcurrent Shutdown Threshold	I _{GPIOL,SD}	30	-	65	mA	V _{GPIO} = VS, hysteresis included	P_12.2.11
GPIO HS overcurrent Shutdown Threshold	I _{GPIOH,SD}	-65	-	-30	mA	V _{GPIO} = 0V, hysteresis included	P_12.2.12
GPIO overcurrent shutdown filter time	t _{GPIO,OC}	20	26	32	μs	²⁾ applies for HS and LS configuration	P_12.2.13
GPIO HS open load detection	I _{GPIOH,OL}	-3.0	-	-0.5	mA	in On-state, hysteresis included	P_12.2.15



Table 30Electrical Characteristics (cont'd)

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
GPIO open load detection filter time	t _{gpio,ol}	51	64	80	μs	2)	P_12.2.16
GPIO WK pin Pull-up Current	I _{PU_GPIO,WK}	-20	-10	-3	μA	$V_{\rm GPIO,WK_{IN}} = 3.5V$	P_12.3.17
GPIO WK pin Pull-down Current	I _{PD_GPIO,WK}	3	10	20	μA	$V_{\rm GPIO,WK_{IN}} = 1.5V$	P_12.3.18

1) Not subject to production test, specified by design.

2) Not subject to production test, tolerance defined by internal oscillator tolerance



12 Supervision Functions

12.1 Reset Function

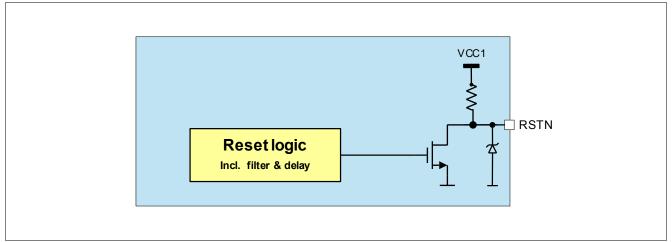


Figure 36 Reset Block Diagram

12.1.1 Reset Output Description


The reset output pin RSTN provides a reset information to the microcontroller, e.g. in the event that the output voltage has fallen below the undervoltage threshold $V_{RT1/2/3/4}$. In case of a reset event, the reset output RSTN is pulled to Low after the filter time t_{RF} and stays Low as long as the reset event is present and the configurable reset delay time has not expired. The reset delay time can be configured. The default value is the extended reset delay time t_{RD1} and the reduced reset delay time t_{RD2} can be selected by setting RSTN_DEL. When connecting the SBC to battery voltage, the reset signal remains Low initially. When the output voltage V_{cc1} has reached the reset default threshold $V_{RT1,r}$, the reset output RSTN is released to High after the reset delay time t_{RD1} . A reset can also occur due to a watchdog trigger failure. The reset threshold can be adjusted via SPI, the default reset threshold is $V_{RT1,f}$. The RSTN pin has an integrated pull-up resistor. In case reset is triggered, it is pulled Low for $V_{cc1} \ge 1V$ and for VS $\ge V_{POR,f}$ (see also Chapter 12.3).

The timings for the RSTN triggering regarding VCC1 undervoltage and watchdog trigger is shown in Figure 37.

TLE9461-3ES V33 Lite CAN SBC Family



Supervision Functions

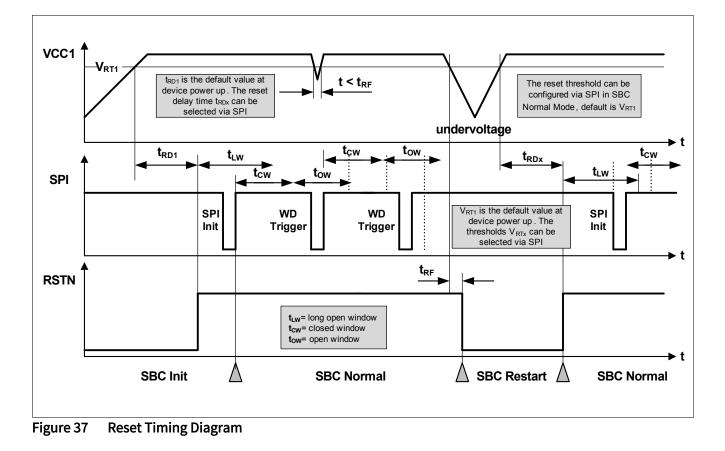

12.1.2 Soft Reset Description

In SBC Normal and SBC Stop Mode, it is also possible to trigger a device internal reset via a SPI command in order to bring the SBC into a defined state in case of failures. In this case the microcontroller must send a SPI command and set the **MODE** bits to '11' in the **M_S_CTRL** register. As soon as this command becomes valid, the SBC is set back to SBC INIT Mode and all SPI registers are set to their default values (see SPI **Chapter 13.5** and **Chapter 13.6**).

Two different soft reset configurations are possible via the SPI bit **SOFT_RESET_RST**:

- SOFT_RESET_RST = '0': The reset output (RSTN) is triggered when the soft reset is executed (default setting, the same reset delay time t_{RD1} applies)
- **SOFT_RESET_RST** = '1': The reset output (RSTN) is not triggered when the soft reset is executed

Note: The device must be in SBC Normal Mode or SBC Stop Mode when sending this command. Otherwise, the command is ignored.



12.2 Watchdog Function

The watchdog is used to monitor the software execution of the microcontroller and to trigger a reset if the microcontroller stops serving the watchdog due to a lock up in the software.

Two different types of watchdog functions are implemented and can be selected via the bit WD_WIN:

- Time-Out Watchdog (default value)
- Window Watchdog

The respective watchdog functions can be selected and programmed in SBC Normal Mode. The configuration stays unchanged in SBC Stop Mode.

Please refer to Table 31 to match the SBC Modes with the respective watchdog modes.

SBC Mode	Watchdog Mode	Remarks
INIT Mode	Starts with Long Open Window	Watchdog starts with Long Open Window after RSTN is released
Normal Mode	WD Programmable	Window Watchdog, Time-Out watchdog or switched Off for SBC Stop Mode
Stop Mode	Watchdog is fixed or Off	
Sleep Mode	Off	SBC starts with Long Open Window when entering SBC Normal Mode.
Restart Mode	Off	SBC starts with Long Open Window when entering SBC Normal Mode.

Table 31 Watchdog Functionality by SBC Modes

The watchdog timing is programmed via SPI command in the register **WD_CTRL**. As soon as the watchdog is programmed, the timer starts with the new setting and the watchdog must be served. The watchdog is triggered by sending a valid SPI-write command to the watchdog configuration register. The watchdog trigger command is executed when the SPI command is interpreted, i.e. 3 clock cycles (typ. 3µs) after the transition of Chip Select input (CSN) from Low to High.

When coming from SBC Init, SBC Restart Mode or in certain cases from SBC Stop Mode, the watchdog timer is always started with a long open window. The long open window (t_{LW} = 200ms) allows the microcontroller to run its initialization sequences and then to trigger the watchdog via SPI.

The watchdog timer period can be selected via the watchdog timing bit field (WD_TIMER) and is in the range of 10 ms to 10000 ms. This setting is valid for both watchdog types.

The following watchdog timer periods are available:

- WD Setting 1: 10ms
- WD Setting 2: 20ms
- WD Setting 3: 50ms
- WD Setting 4: 100ms
- WD Setting 5: 200ms
- WD Setting 6: 500ms
- WD Setting 7: 1000ms
- WD Setting 8: 10000ms

In case of a watchdog reset, SBC Restart or SBC Fail-Safe Mode is entered according to the configuration and the SPI bits **WD_FAIL** are set. Once the RSTN goes High again the watchdog immediately starts with a long open window the SBC enters automatically SBC Normal Mode.

TLE9461-3ES V33 Lite CAN SBC Family



Supervision Functions

In SBC Development Mode the watchdog is Off and therefore no reset is generated due to a watchdog failure.

Depending on the configuration, the WD_FAIL bits are set after a watchdog trigger failure as follows:

- In case an incorrect WD trigger is received (triggering in the closed watchdog window or when the watchdog counter expires without a valid trigger) then the WD_FAIL bits are incremented (showing the number of incorrect WD triggers)
- For config 2: the bits can have the maximum value of '01'
- For config 1, 3 and 4: the bits can have the maximum value of '10'

The **WD_FAIL** bits are cleared automatically if following conditions apply:


- After a successful watchdog trigger
- When the watchdog is Off: in SBC Stop Mode after successfully disabling the watchdog, in SBC Sleep Mode, or in SBC Fail-Safe Mode (except for a watchdog failure)

12.2.1 Time-Out Watchdog

The time-out watchdog is an easier but less secure watchdog than a window watchdog because the watchdog trigger can be set at any time within the configured watchdog timer period.

A correct watchdog service immediately results in starting a new watchdog timer period. Taking the tolerances of the internal oscillator into account the safe trigger area is defined in Figure 38.

If the time-out watchdog period elapses, a watchdog reset is created by setting the reset output RSTN Low and the SBC switches to SBC Restart or SBC Fail-Safe Mode.

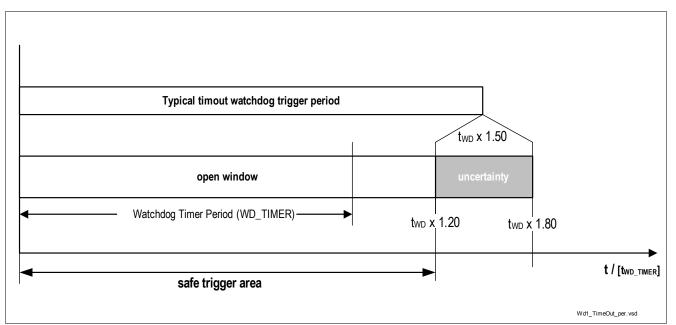



12.2.2 Window Watchdog

Compared to the time-out watchdog the characteristic of the window watchdog is that the watchdog timer period is divided into a closed and an open window. The watchdog must be triggered within the open window.

A correct watchdog trigger results in starting the window watchdog period with a closed window followed by an open window.



The watchdog timer period is also the typical trigger time and defines the middle of the open window. Taking the oscillator tolerances into account leads to a safe trigger area of:

 $t_{WD} \times 0.72 < safe trigger area < t_{WD} \times 1.20$.

The typical closed window is defined to a width of 60% of the selected window watchdog timer period. Taking the tolerances of the internal oscillator into account leads to the timings as defined in Figure 39.

A correct watchdog service immediately results in starting the next closed window.

If the trigger signal meets the closed window or the watchdog timer period elapses, then a watchdog reset is created by setting the reset output RSTN Low and the SBC switches to SBC Restart or SBC Fail-Safe Mode.

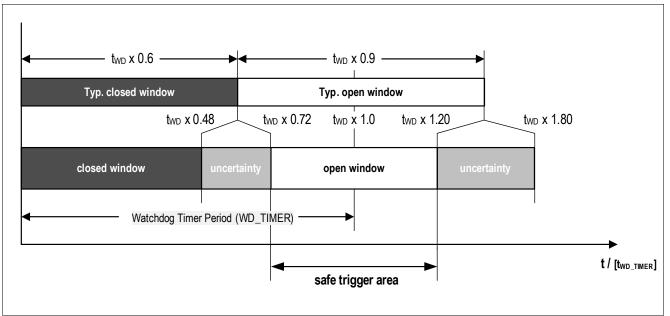


Figure 39 Window Watchdog Definitions

12.2.3 Watchdog Setting Check Sum

A check sum bit is part of the SPI command to trigger the watchdog and to set the watchdog setting.

The sum of the 8 data bits in the register WD_CTRL needs to have even parity (see Equation (12.1)). This is realized by either setting the bit CHECKSUM to 0 or 1. If the check sum is wrong, then the SPI command is ignored, i.e. the watchdog is not triggered or the settings are not changed and the bit SPI_FAIL is set.

The checksum is calculated by taking all 8 data bits into account. The written value of the reserved bit 3 of the **WD_CTRL** register is considered (even if read as '0' in the SPI output) for checksum calculation, i.e. if a '1' is written on the reserved bit position, then a '1' is used in the checksum calculation.

(12.1)

CHKSUM = Bit15
$$\oplus \dots \oplus$$
 Bit8

12.2.4 Watchdog during SBC Stop Mode

The watchdog can be disabled for SBC Stop Mode in SBC Normal Mode. For safety reasons a special sequence must be followed in order to disable the watchdog as described in Figure 40. Two different SPI bits (WD_STM_EN_0, WD_STM_EN_1) in the registers WK_CTRL_0 and WD_CTRL need to be set.



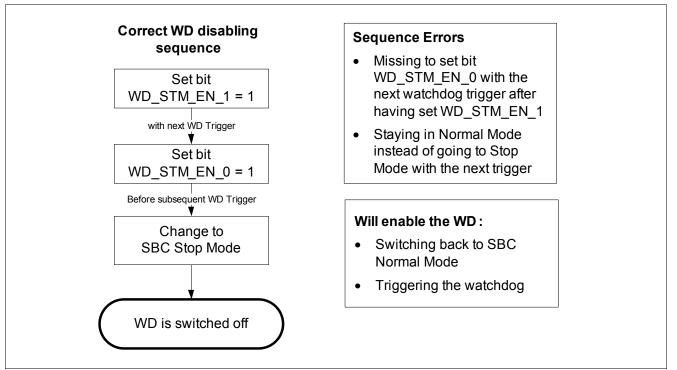


Figure 40 Watchdog disabling sequence in SBC Stop Mode

If a sequence error occurs, then the bit WD_STM_EN_1 is cleared and the sequence has to be started again. The watchdog can be enabled by triggering the watchdog in SBC Stop Mode or by switching back to SBC Normal Mode via SPI command. In both cases the watchdog starts with a long open window and the bits WD_STM_EN_1 and WD_STM_EN_0 are cleared. After the long open window the watchdog has to be served as configured in the WD_CTRL register.

Note: The bit WD_STM_EN_0 is cleared automatically when the sequence is started and it was '1' before. WD_STM_EN_0 can also not be set if WD_STM_EN_1 isn't yet set.

12.2.5 Watchdog Start in SBC Stop Mode due to Bus Wake

In SBC Stop Mode the Watchdog can be disabled. In addition a feature is available that starts the watchdog with any Bus wake (CAN) during SBC Stop Mode. This feature is enabled by setting the bit **WD_EN_WK_BUS** = 1 (= default value after POR). The bit can only be changed in SBC Normal Mode and needs to be programmed before starting the watchdog disabling sequence.

A wake on CAN generates an interrupt and the RXD pin for CAN is pulled to Low. By these signals the microcontroller is informed that the watchdog is started with a long open window. After the long open window the watchdog has to be served as configured in the WD_CTRL register.

To disable the watchdog again, the SBC has to be switched to Normal Mode and the sequence has to be sent again.



12.3 VS Power-On Reset

At power up of the device, the VS Power-on Reset is detected when VS > $V_{POR,r}$ and the SPI bit POR is set to indicate that all SPI registers are set to POR default settings. VCC1 is starting up and the reset output RSTN is kept Low. It will only be released once VCC1 has crossed $V_{RT1,r}$ and t_{RD1} has elapsed.

In case VS < $V_{POR,f}$, a device internal reset is generated and the SBC is switched Off and restarts in INIT mode with the next VS rising. This is shown in Figure 41.

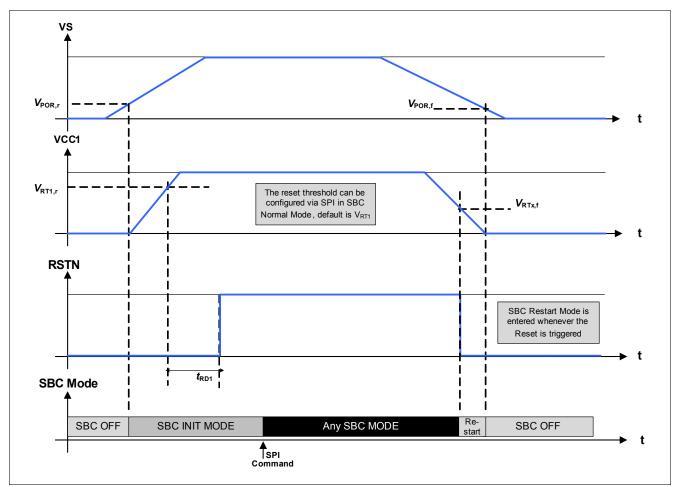


Figure 41 Ramp up / down example of Supply Voltage



12.4 VS Under- and Overvoltage

12.4.1 VS Undervoltage

The VS under-voltage monitoring is always active in SBC Init-, Restart- and Normal Mode (see below conditions for SBC Stop Mode). If the supply voltage VS reaches the undervoltage threshold $V_{s,uv}$ then the SBC triggers the following actions:

- SPI bit VS_UV is set. No other error bits are set. The bit can be cleared once the VS undervoltage condition is not present anymore
- The VCC1 short circuit protection becomes inactive (see **Chapter 12.6**). However, the thermal protection of the device remains active. If the undervoltage threshold is exceeded (VS rising) then the function is automatically enabled again

Note: VS under-voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements except if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold.

12.4.2 VS Overvoltage

The VS over-voltage monitoring is always active SBC Init-, Restart- and Normal Mode (see below note for conditions in SBC Stop Mode) or when the charge pump is enabled. If the supply voltage VS reaches the over-voltage threshold V_{s.ov} then the SBC does the following measures:

• SPI bit VS_OV is set. This bit is intended for diagnosis only, i.e. or other error bits are set. The bit can be cleared once the VS over-voltage condition is not present anymore

If the charge pump is disabled after the bit V_{s.ov} was set then the bit will stay set until it is cleared via SPI.

Note: VS over-voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements except if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold.

12.5 VCC1 Over-/ Undervoltage and Undervoltage Prewarning

12.5.1 VCC1 Undervoltage and Undervoltage Prewarning

This function is always active when the VCC1 voltage regulator is enabled. The supervision is implemented at the pin VIO (VIO must be connected to VCC1).

A first-level voltage detection threshold is implemented as a prewarning for the microcontroller. The prewarning event is signaled with the bit VCC1_WARN. No other actions are taken.

As described in Chapter 12.1 and Figure 42, a reset is triggered (RSTN pulled Low) when the V_{CC1} output voltage falls below the selected undervoltage threshold (V_{RTx}). The SBC enters SBC Restart Mode and the bit VCC1_UV is set when RSTN is released again.

The hysteresis of the VCC1 undervoltage threshold can be increased by setting the bit **RSTN_HYS**. In this case always the highest rising threshold (Vrt1,r) is used for the release of the undervoltage reset. The falling reset threshold remains as configured.

Note: The VCC1_ WARN or VCC1_UV bits are not set in Sleep Mode as $V_{CC1} = 0V$ in this case



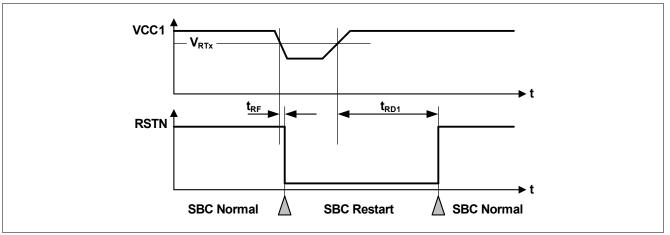


Figure 42 VCC1 Undervoltage Timing Diagram

Note: It is recommended to clear the VCC1_ WARN and VCC1_UV bit once it is detected by the microcontroller software to verify whether the undervoltage is still present.

12.5.2 VCC1 Overvoltage

For fail-safe reasons a configurable VCC1 over voltage detection feature is implemented. It is active when the VCC1 voltage regulator is enabled. The supervision is implemented at the pin VIO (VIO must be connected to VCC1).

In case the $V_{CC1,OV,r}$ threshold is crossed, the SBC triggers following measures (depending on the configuration):

- The bit VCC1_OV is always set;
- If the bit VCC1_OV_RST is set and CFG0_STATE = '1', then SBC Restart Mode is entered. The FO output is activated. After the reset delay time (t_{RD1}), the SBC Restart Mode is left and SBC Normal Mode is resumed even if the VCC1 over voltage event is still present (see also Figure 43). The VCC1_OV_RST bit is cleared automatically;
- If the bit VCC1_OV_RST is set and CFG0_STATE = '0', then SBC Fail-Safe Mode is entered and FO output is
 activated.
- Note: External noise could be coupled into the VCC1 supply line. Especially, in case the VCC1 output current in SBC STOP Mode is below the active peak threshold (I_{VCC1,Ipeak}) the bit VCC1_OV_RST must be set to '0' before entering SBC Stop Mode to avoid unintentional SBC Restart or Fail-Safe Mode entry and to ignore the VCC1_OV bit due to external noise.



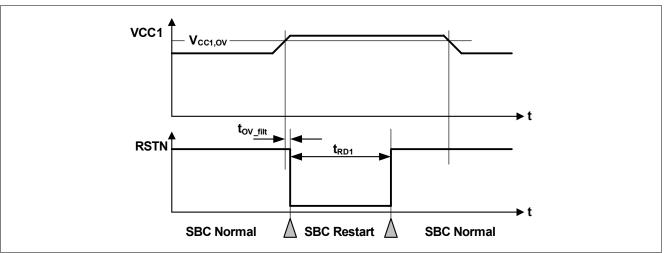


Figure 43 VCC1 Over Voltage Timing Diagram

12.6 VCC1 Short Circuit Diagnostics

The supervision is implemented at the pin VIO (VIO must be connected to VCC1).

The short circuit protection feature for V_{CC1} is implemented as follows:

- The short circuit detection is only enabled if VS > V_{s.uv}.
- If VCC1 is not above the V_{RTx} within t_{VCC1,SC} after device power up or after waking from SBC Sleep or Fail-Safe Mode (i.e. after VCC1 is enabled) then the SPI bit VCC1_SC bit is set, VCC1 is turned Off, the FO pin is enabled, FAILURE is set and SBC Fail-Safe Mode is entered. The SBC can be activated again via a wake-up on CAN and WK or GPIO if configured as wake input.
- The same behavior applies, if V_{CC1} falls below V_{RTx} for longer than $t_{VCC1,SC}$.

12.7 VCC2 Undervoltage and VCAN Undervoltage

An undervoltage warning is implemented for VCC2 and VCAN as follows:

- V_{CC2} undervoltage detection: In case V_{CC2} is enabled and drops below the V_{CC2,UV,f} threshold, then the SPI bit VCC2_UV is set and can be only cleared via SPI. During power-up the blanking time t_{VCC2,Blank} applies, i.e. no undervoltage warning bit is set during this time.
- V_{CAN} undervoltage detection: In case *the CAN module is enabled and the voltage on V_{CAN}* drops below the V_{CAN_UV,f} threshold, then the SPI bit VCAN_UV is set and can be only cleared via SPI.

Note: The VCC2_UV flag is not set during turn-On or turn-Off of V_{CC2} .



12.8 Thermal Protection

Three independent and different thermal protection features are implemented in the SBC according to the system impact:

- Individual thermal shutdown of specific blocks
- Temperature prewarning of main microcontroller supply VCC1
- SBC thermal shutdown due to VCC1 overtemperature

12.8.1 Individual Thermal Shutdown

As a first-level protection measure the output stages VCC2 and CAN are independently switched Off if the respective block reaches the temperature threshold $T_{jTSD1_1} / T_{jTSD1_2}$. Then the **TSD1** bit is set. This bit can only be cleared via SPI once the overtemperature is not present anymore. Independent of the SBC Mode the thermal shutdown protection is only active if the respective block is On.

The respective modules behave as follows:

- VCC2: Is switched to Off and the control bits VCC2_ON are cleared. The status bit VCC2_OT is set. Once the overtemperature condition is not present anymore, then VCC2 has to be configured again by SPI.
- CAN: The transmitter is disabled and stays in CAN Normal Mode acting like CAN Receive only mode. The status bits CAN_FAIL = '01' are set. Once the overtemperature condition is not present anymore, then the CAN transmitter is automatically switched On.

Note: The diagnosis bits are not cleared automatically and have to be cleared via SPI once the overtemperature condition is not present anymore.

12.8.2 Temperature Prewarning

As a next level of thermal protection a temperature prewarning is implemented. If the main supply VCC1 exceeds the thermal prewarning temperature threshold T_{jPW} . Then the status bit **TPW** is set. This bit can only be cleared via SPI once the overtemperature is not present anymore.

12.8.3 SBC Thermal Shutdown

As the highest level of thermal protection a temperature shutdown of the SBC is implemented if the main supply VCC1 reaches the thermal shutdown temperature threshold $T_{jTSD1_1} / T_{jTSD1_2}$. Once a TSD2 event is detected SBC Fail-Safe Mode is entered. Only when device temperature falls below the TSD2 threshold then the device remains in SBC Fail-Safe Mode for t_{TSD2} to allow the device to cool down. After this time has expired, the SBC automatically changes via SBC Restart Mode to SBC Normal Mode (see also **Chapter 5.1.6**).

When a TSD2 event is detected, then the status bit **TSD2** is set. This bit can only be cleared via SPI in SBC Normal Mode once the overtemperature is not present anymore.

For increased robustness it is possible to extend the TSD2 waiting time by 64x of t_{TSD2} after 16 consecutive TSD2 events by setting the SPI bit TSD2_DEL. The counter is incremented with each TSD2 event even if the bit TSD2 is not cleared. Once the counter has reached the value 16, then the bit TSD2_SAFE is set and the extended TSD2 waiting time is active. The extended waiting time is kept until TSD2_SAFE is cleared. The TSD counter is cleared when TSD2 or TSD2_DEL is cleared.

- *Note:* In case a TSD2 overtemperature occurs while entering SBC Sleep Mode then SBC Fail-Safe mode is entered.
- *Note:* To enable higher ambient temperatures the thermal shutdown thresholds can be increased by 10K for TSD1 and TSD2 by setting the bit TSD_THR.



12.9 Electrical Characteristics

Table 32Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol		Value	5	Unit	Note or	Number	
		Min.	Тур.	Max.		Test Condition		
VCC1 Monitoring;								
VCC1 UV Prewarning Detection Filter Time	$t_{\rm VCC1,PW_F}$	5	10	14	us	³⁾ rising and falling	P_13.9.4	
Undervoltage Prewarning Threshold Voltage PW,f	V _{PW,f}	3.0	3.1	3.2	V	VCC1 falling, SPI bit is set	P_13.9.14	
Undervoltage Prewarning Threshold Voltage PW,r	V _{PW,r}	3.04	3.14	3.24	V	VCC1 rising	P_13.9.15	
Undervoltage Prewarning Threshold Voltage hysteresis	V _{PW,hys}	15	40	55	mV	5)	P_13.9.16	
Reset Threshold Voltage RT1,f	V _{RT1,f}	2.95	3.05	3.15	V	default setting; P_13 VCC1 falling		
Reset Threshold Voltage RT1,r	V _{RT1,r}	3.04	3.13	3.23	V	default setting; VCC1 rising	P_13.9.18	
Reset Threshold Voltage RT2,f	V _{RT2,f}	2.45	2.55	2.65	V	VCC1 falling	P_13.9.19	
Reset Threshold Voltage RT2,r	V _{RT2,r}	2.55	2.65	2.75	V	VCC1 rising	P_13.9.20	
Reset Threshold Voltage RT3,f	V _{RT3,f}	2.14	2.25	2.35	V	SPI option; VS ≥ 4V; VCC1 falling	P_13.9.21	
Reset Threshold Voltage RT3,r	V _{RT3,r}	2.24	2.35	$\begin{array}{cccc} 35 & 2.45 & V & VS \ge 4V; \\ VCC1 rising & \end{array} $		P_13.9.22		
Reset Threshold Voltage RT4,f	V _{RT4,f}	1.65	1.75	1.85	V	VS ≥ 4V; VCC1 falling	P_13.9.23	
Reset Threshold Voltage RT4,r	V _{RT4,r}	1.75	1.85	1.95	V	VS ≥ 4V; VCC1 rising,	P_13.9.24	
Reset Threshold Hysteresis	V _{RT,hys}	45	90	140	mV	5)	P_13.9.25	



Table 32Electrical Characteristics (cont'd)

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol		Values			Note or	Number	
		Min.	Min. Typ. Max.			Test Condition		
VCC1 Over Voltage Detection Threshold Voltage	V _{CC1,OV,r}	3.7	3.85	4.0	V	¹⁾⁵⁾ rising VCC1	P_13.9.28	
VCC1 Over Voltage Detection Threshold Voltage	V _{CC1,OV,f}	3.6	3.75	3.9	V	⁵⁾ falling VCC1	P_13.9.29	
VCC1 Over Voltage Detection hysteresis	V _{CC1,OV,hys}	50	100	200	mV	5)	P_13.9.30	
VCC1 OV Detection Filter Time	t _{vcc1,ov_f}	51	64	80	us	3)	P_13.9.31	
VCC1 Short to GND Filter Time	t _{vcc1,sc}	1.6	2	2.4	ms	³⁾ blanking time P_13.9 during power-up, short circuit detection for VS ≥ VS,UV		
Reset Generator; Pin RSTN						-	!	
Reset Low Output Voltage	V _{rstn,l}	-	0.2	0.4	V	$I_{\text{RSTN}} = 1 \text{ mA for}$ $V_{\text{CC1}} \ge 1 \text{ V \&}$ $V_{\text{S}} \ge V_{\text{POR,f}}$	P_13.9.33	
Reset High Output Voltage	V _{rstn,h}	0.8 x V _{CC1}	-	V _{CC1} + 0.3 V	V	<i>I</i> _{RSTN} = -20 μA	P_13.9.34	
Reset Pull-up Resistor	R _{RSTN}	10	20	40	kΩ	$V_{\rm RSTN} = 0 \rm V$	P_13.9.35	
Reset Filter Time	t _{RF}	4	10	26	μs	$^{3)}V_{CC1} < V_{RT1x}$ to RSTN = L see also Chapter 12.3	P_13.9.36	
Reset Delay Time (long)	t _{RD1}	8	10	12	ms	^{2) 3)} RSTN_DEL = '0' (default value)	P_13.9.37	
Reset Delay Time (reduced)	t _{RD2}	1.6	2	2.4	ms	^{2) 3)} RSTN_DEL = '1'	P_13.9.70	
VCC2 Monitoring								
VCC2 Undervoltage Threshold Voltage (falling)	V _{CC2,UV,f}	4.5	-	4.75	V	VCC2 falling	P_13.9.38	
VCC2 Undervoltage Threshold Voltage (rising)	V _{CC2,UV,r}	4.6	-	4.85	V	VCC2 rising	P_13.9.39	
V _{cc2} Undervoltage detection hysteresis	V _{CC2,UV, hys}	70	150	250	mV	⁵⁾ P_13.9.4		
VCC2 Undervoltage Detection Filter Time	Indervoltage $t_{\rm VCC2, UV_F}$ 5 10		10	14	us	³⁾ rising and falling	P_13.9.41	



Table 32Electrical Characteristics (cont'd)

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol		Value	s	Unit	Note or	Number	
		Min.	Тур.	Max.		Test Condition		
VCC2 UV Blanking Time	$t_{ m VCC2,Blank}$	3.2	4	4.8	ms	³⁾ after switching On	ning P_13.9.42	
VCAN Monitoring			·		·			
CAN Supply undervoltage detection threshold (falling)	V _{CAN_UV,f}	4.5	-	4.75	V	VCAN falling	P_13.9.43	
CAN Supply undervoltage detection threshold (rising)	V _{CAN_UV,r}	4.6	-	4.85	V	VCAN rising	P_13.9.44	
V _{CAN} Undervoltage detection hysteresis	V _{CAN,UV, hys}	70	150	250	mV	5)	P_13.9.45	
VCAN UV detection Filter Time	t _{vcan,uv_f}	4.2	10	14	μs	³⁾ VCAN rising and falling	P_13.9.46	
Watchdog Generator / Intern	al Oscillator	•	I					
Long Open Window	t _{LW}	160	200	240	ms	3)	P_13.9.47	
Internal Clock Generator Frequency	f _{CLKSBC,1}	0.8	1.0	1.2	MHz	-	P_13.9.48	
Internal Oscillator 2MHz for Charge Pump	f _{CLKSBC,2}	1.8	2.0	2.2	MHz	2MHZ_FREQ ='001';	P_13.9.65	
Minimum Waiting time durin	g SBC Fail-S	afe Mode	3					
Min. waiting time Fail-Safe	t _{FS,min}	80	100	120	ms	3)4)	P_13.9.49	
Power-On Reset, Over / Unde	ervoltage Pro	otection						
VS Power-on reset rising	V _{POR,r}	-		4.5	V	VS increasing	P_13.9.50	
VS Power-on reset falling	V _{POR,f}	-		3	V	VS decreasing	P_13.9.51	
VS Undervoltage Detection Threshold	V _{S,UV}	3.7	-	4.4	V	Supply UV threshold for VCC1 SC detection; hysteresis included; includes rising and falling threshold	P_13.9.53	
VS Undervoltage Detection Hysteresis	V _{S,UV, hys}	50	90	130	mV	5)	P_13.9.68	
VS Undervoltage Detection Filter Time	t _{vs,uv}	5	10	14	us	³⁾ rising and falling	P_13.9.62	



Table 32 Electrical Characteristics (cont'd)

 $V_{\rm S}$ = 5.5 V to 28 V; $T_{\rm j}$ = -40°C to +150°C; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin

(unless otherwise specified)

Parameter	Symbol		Value	s	Unit	Note or	Number	
		Min.	Тур.	Max.		Test Condition		
VS Over voltage Detection Threshold	V _{S,OV}	22	-	25	V	⁵⁾ Supply OV threshold; only SPI diagnosis bit is set; includes rising and falling threshold	P_13.9.63	
VS Overvoltage Detection Filter Time	t _{vs,ov}	5	10	14	us	³⁾ rising and falling	P_13.9.64	
VS Overvoltage Detection Hysteresis	V _{S,OV, hys}	0.3	-	0.55	V	5)	P_13.9.69	
Overtemperature Shutdowr	1 ⁵⁾				·			
Thermal Prewarning Temperature	T _{jPW}	125	145	165	°C	T _j rising	P_13.9.54	
Thermal Shutdown TSD1	T _{jTSD1_1}	170	185	200	°C	T _j rising; TSD_THR = 0	P_13.9.55	
Thermal Shutdown TSD1 (high temp)	T _{jTSD1_2}	180	195	210	°C	T _j rising; TSD_THR = 1	P_13.9.60	
Thermal Shutdown TSD2	T _{jTSD2_2}	170	185	200	°C	T _j rising; TSD_THR = 0	P_13.9.56	
Thermal Shutdown TSD2 (high temp)	T _{jTSD2_2}	180	195	210	°C	T _j rising; TSD_THR = 1	P_13.9.61	
Thermal Shutdown hysteresis	T _{jTSD,hys}	-	25	-	°C	-	P_13.9.57	
TSD/TPW Filter Time	t _{tsd_tpw_f}	5	10	14	us	³⁾ rising and falling, applies to all thermal sensors (TPW, TSD1, TSD2)	P_13.9.58	
Deactivation time after thermal shutdown TSD2	t _{TSD2}	0.8	1	1.2	s	3)	P_13.9.59	

It is ensured that the threshold V_{CC1,OV,r} in SBC Normal Mode is always higher than the highest regulated V_{CC1} output voltage V_{CC1,out4}.

2) The reset delay time starts when VCC1 crosses above the selected Vrtx threshold

3) Not subject to production test, tolerance defined by internal oscillator tolerance.

4) This time applies for all failure entries except a device thermal shutdown (TSD2 has a typ. 1s waiting time t_{TSD2})

5) Not subject to production test, specified by design.



13 Serial Peripheral Interface

The Serial Peripheral Interface is the communication link between the SBC and the microcontroller.

The TLE9461-3ES V33 is supporting multi-slave operation in full-duplex mode with 16-bit and 32-bit data access (see also Figure 46).

The SPI behavior for the different SBC Modes is as follows:

- The SPI is enabled in SBC Init, Normal and Stop Mode
- The SPI is disabled in SBC Sleep, Restart and Fail-Safe Mode

13.1 SPI Block Description

The Control Input Word is read via the data input SDI, which is synchronized with the clock input CLK provided by the microcontroller. The output word appears synchronously at the data output SDO (see Figure 44 with a 16-bit data access example).

The transmission cycle begins when the chip is selected by the input CSN (Chip Select Not), Low active. After the CSN input returns from Low to High, the word that has been read is interpreted according to the content. The SDO output switches to tristate status (high impedance) at this point, thereby releasing the SDO bus for other use. The state of SDI is shifted into the input register with every falling edge on CLK. The state of SDO is shifted out of the output register after every rising edge on CLK. The SPI of the SBC is not daisy chain capable.

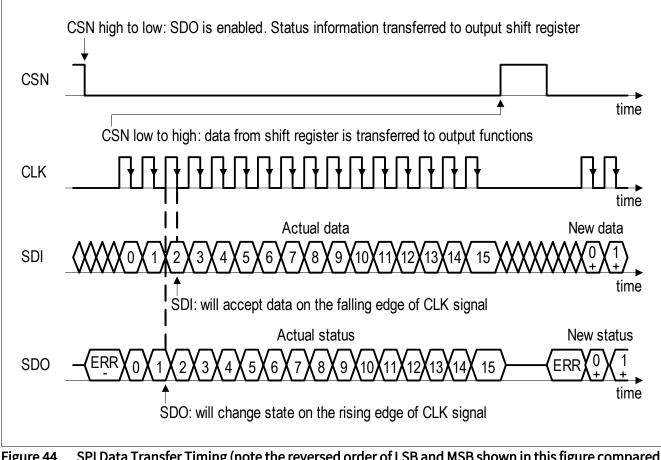


Figure 44 SPI Data Transfer Timing (note the reversed order of LSB and MSB shown in this figure compared to the register description)



13.2 Failure Signalization in the SPI Data Output

If the microcontroller sends a wrong SPI command to the SBC, the SBC ignores the information. Wrong SPI commands are either invalid SBC mode commands or commands which are prohibited by the state machine to avoid undesired device or system states (see below). In this case the diagnosis bit 'SPI_FAIL' is set and the SPI Write command is ignored (mostly no partial interpretation). This bit can be only reset by actively clearing it via a SPI command.

Invalid SPI commands leading to SPI_FAIL are listed below (in this case the SPI command is ignored):

- Illegal state transitions:
 - Going from SBC Stop to SBC Sleep Mode. In this case the SBC enters SBC Restart Mode;
 - Trying to go to SBC Stop or SBC Sleep Mode from SBC Init Mode. In this case SBC Normal Mode is entered
- Uneven parity in the data bit of the WD_CTRL register. In this case the watchdog trigger is ignored and/or the new watchdog settings are ignored respectively
- In SBC Stop Mode: attempting to change any SPI settings, e.g. changing the watchdog configuration, PWM settings and HS configuration settings during SBC Stop Mode, etc.; the SPI command is ignored in this case; only WD trigger, returning to Normal Mode, triggering a SBC Soft Reset, and Read & Clear status registers commands are valid SPI commands in SBC Stop Mode;

Note: No failure handling is done for the attempt to go to SBC STOP Mode when all bits in the registers **BUS_CTRL_0** and **WK_CTRL_1** are cleared because the microcontroller can leave this mode via SPI

- When entering SBC Stop Mode and WK_STAT_0 and WK_STAT_1 are not cleared; SPI_FAIL is not set but the INTN pin is triggered
- Changing from SBC Stop to Normal Mode and changing the other bits of the M_S_CTRL register. The other modifications are ignored
- SBC Sleep Mode: attempt to go to Sleep Mode without any wake source set, i.e. when all bits in the
 BUS_CTRL_0, WK_CTRL_1 and GPIO_CTRL registers are cleared. In this case the SPI_FAIL bit
 is set and the device enters SBC Restart Mode.

Even though the Sleep Mode command is not entered in this case, the rest of the command (e.g. modifying VCC2) is executed but restart values apply during SBC Restart Mode;

Note: At least one wake source must be activated in order to avoid a deadlock situation in SBC Sleep Mode, i.e. the SBC would not be able to wake-up anymore.

If the only wake source is a timer and the timer is Off then the SBC will wake-up immediately from Sleep Mode and enter Restart Mode;

- Trying to set WK_MEAS when FO/GPIO is not Off, i.e. FO is activated/configured or any GPIO configuration is selected
- Trying to change the GPIO_CTRL settings in case WK_MEAS is set
- Setting a longer or equal On-time than the timer period of the respective timer
- SDI stuck at High or Low, e.g. SDI received all '0' or all '1'

Note: There is no SPI fail information for unused addresses.

Signalization of the ERR Flag (high active) in the SPI Data Output (see Figure 44):

The ERR flag presents an additional diagnosis possibility for the SPI communication. The ERR flag is being set for following conditions:

- in case the number of received SPI clocks is not 0 or 16 or 32
- in case RSTN is Low and SPI frames are being sent at the same time.



Serial Peripheral Interface

Note: In order to read the SPI ERR flag properly, CLK must be Low when CSN is triggered, i.e. the ERR bit is not valid if the CLK is High on a falling edge of CSN

The number of received SPI clocks is not 0, 16 or 32:

The number of received input clocks is supervised to be 0 or 16 or 32 clock cycles and the input word is discarded in case of a mismatch (0 clock cycle to enable ERR signalization). The error logic also recognizes if CLK was High during CSN edges. Both errors - 0 or 16 or 32 bit CLK mismatch or CLK High during CSN edges - are flagged in the following SPI output by a "High" at the data output (SDO pin, bit ERR) before the first rising edge of the clock is received. The complete SPI command is ignored in this case.

RSTN is Low and SPI frames are being sent at the same time:

The ERR flag is set when the RSTN pin is triggered (during SBC Restart) and SPI frames are being sent to the SBC at the same time. The behavior of the ERR flag is signalized at the next SPI command for below conditions:

- if the command begins when RSTN is High and it ends when RSTN is Low,
- if a SPI command is sent while RSTN is Low,
- If a SPI command begins when RSTN is Low and it ends when RSTN is High.

and the SDO output behaves as follows:

- always when RSTN is Low then SDO is High,
- when a SPI command begins with RSTN is Low and ends when RSTN is High, then the SDO should be ignored because wrong data is sent.
- Note: It is possible to quickly check for the ERR flag without sending any data bits. i.e. only the CSN is pulled Low and SDO is observed - no SPI Clocks are sent in this case
- *Note:* The ERR flag could also be set after the SBC has entered SBC Fail-Safe Mode because the SPI communication is stopped immediately.

13.3 SPI Programming

For the TLE9461-3ESV33, 7 bits are used or the address selection (BIT6...0). Bit 7 is used to decide between Read Only and Read & Clear for the status bits, and between Write and Read Only for configuration bits. For the actual configuration and status information, 8 data bits (BIT15...8) are used.

Writing, clearing and reading is done byte wise. The SPI status bits are not cleared automatically and must be cleared by the microcontroller, e.g. if the TSD2 was set due to over temperature. Some of the configuration bits will automatically be cleared by the SBC - please refer to the respective register descriptions for detailed information. In SBC Restart Mode, the device ignores all SPI communication, i.e. it does not interpreted it.

There are two types of SPI registers:

- Control registers: These registers are used to configure the SBC, e.g. SBC mode, watchdog trigger, etc.
- Status registers: These registers indicate the status of the SBC, e.g. wake-up events, warnings, failures, etc.

For the status registers, the requested information is given in the same SPI command in the data out (SDO). For the control registers, the status of each byte is shown in the same SPI command as well. However, configuration changes of the same register are only shown in the next SPI command (configuration changes inside the SBC become valid only after CSN changes from Low to High).

Writing of control registers is possible in SBC Init and Normal Mode. During SBC Stop Mode only the change to SBC Normal Mode and triggering the watchdog is allowed as well as reading and clearing the status registers.



Serial Peripheral Interface

Certain SPI control bits used to configure device functionality can be locked to avoid unintentional bit modification. The respective bit type is 'rwl'. There are two levels of configuration locks:

- CFG_LOCK_0 in the HW_CTRL_1 is the level 0 lock mechanism: The bits CP_EN and GPIO can be locked. In case the configuration must be changed then CFG_LOCK_0 must be cleared first
- CFG_LOCK_1 in the HW_CTRL_2 is the level 1 lock mechanism: All other lockable bits with the type 'rwl' are locked and can only be modified at the next device power up

No status information can be lost, even if a bit changes right after the first 7 SPI clock cycles before the SPI frame ends. In this case the status information field is updated with the next SPI command. However, the flag is already set in the relevant status register.

The SBC status information from the SPI status registers is transmitted in a compressed format with each SPI response on SDO in the so-called Status Information Field register (see also **Figure 45**). The purpose of this register is to quickly signal changes in the SPI status registers to the microcontroller. This means that the microcontroller only needs to read registers which have changed.

Each bit in the Status Information Field represents a SPI status register (see **Table 33**). As soon as one bit is set in one of the status registers, the corresponding bit in the Status Information Field register is set. Only the most important registers are represented in the Status Information Field, e.g. the register **WK_LVL_STAT** is not included.

For example if bit 0 in the Status Information Field is set to '1', one or more bits of the register 100 0001 (SUP_STAT_0) are set to 1. Then this register needs to be read with a second SPI command. The bit in the Status Information Field is set to 0 when all bits in the register 100 0001 have been reset to '0'.

Bit in Status Information Field	Corresponding Address Bit	Status Register Description			
0	100 0001	SUP_STAT_0 - Supply Status: POR, VCC2 fail, VCC1 fail			
1	100 0010THERM_STAT - Thermal Protection Status				
2	100 0011	DEV_STAT- Device Status: Mode before wake-up- up/failure, WD Fail, SPI Fail, Failure			
3	100 0100	BUS_STAT - Bus Failure Status: CAN;			
4	100 0110 100 0111	WK_STAT_0, WK_STAT_1 - Wake Source Status; Status bit is a combinational OR of both registers			
5 100 0000		SUP_STAT_1: VS_UV, VCC1_WARN/OV			
6	101 0100	GPIO_OC_STAT: GPIO over current			
7	101 0101	GPIO_OL_STAT: GPIO open load			

Table 33Status Information Field



Serial Peripheral Interface

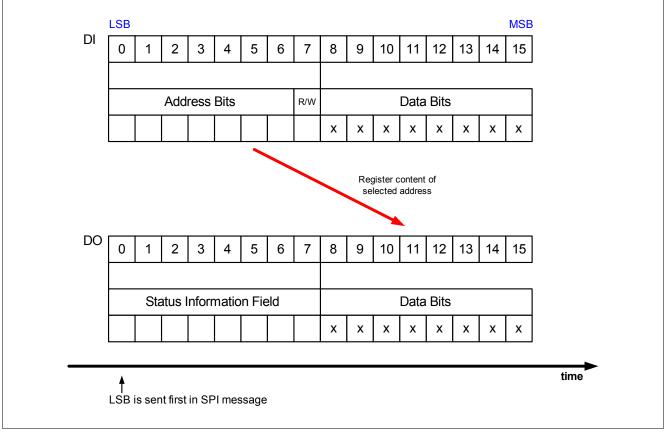


Figure 45 SPI Operation Mode

32-bit Register Access for SWK Control Registers

The operation of the 16-bit and 32-bit SPI data access is shown in Figure 46.

The 32-bit SPI data access is only available for the Selective Wake register addresses 010 0000 to 011 1111. The registers SWK_OSC_CAL_H_STAT and SWK_OSC_CAL_L_STAT are excluded from the 32-bit SPI access.

The TLE9461-3ES V33 tolerates reserved register access, i.e. registers that do not exist. In this case the next existing register address is accessed. If the available address space is exceeded during a SPI command, e.g. higher than address '011 1111', then the higher addresses are ignored and the return value is '0x00' for those addresses.

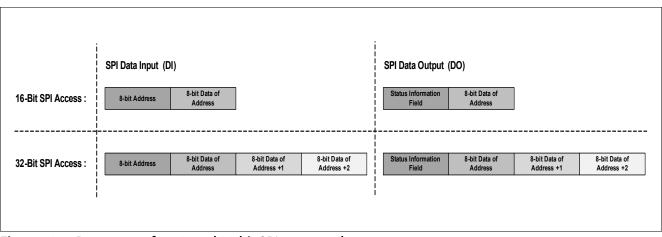


Figure 46 Data access for 16- and 32-bit SPI commands



13.4 SPI Bit Mapping

The following figures show the mapping of the registers and the SPI bits of the respective registers.

The Control Registers '000 0000' to '001 1110' are Read/Write Register. The registers '010 0000' to '011 1111' are dedicated control registers for CAN Partial Networking (=Selective Wake). Depending on bit 7 the bits are only read (setting bit 7 to '0') or also written (setting bit 7 to '1'). The new setting of the bit after a write can be seen with a new read / write command.

The registers '100 0000' to '111 1110' are Status Registers and can be read or read with clearing the bit (if possible) depending on bit 7. To clear a Data Byte of one of the Status Registers bit 7 must be set to '1'. The registers WK_LVL_STAT, and FAM_PROD_STAT, SWK_OSC_CAL_H_STAT, SWK_OSC_CAL_L_STAT, SWK_STAT, SWK_ECNT_STAT, SWK_CDR_STAT1, SWK_CDR_STAT2 are an exception as they show the actual voltage level at the respective WK pin (Low/High), or a fixed family/ product ID respectively and can thus not be cleared. It is recommended for proper diagnosis to clear respective status bits for wake-up events or failure. However, in general it is possible to enable drivers without clearing the respective failure flags.

When changing to a different SBC Mode, certain configurations bits is cleared automatically or modified:

- The SBC Mode bits are updated to the actual status, e.g. when returning to Normal Mode
- When changing to a low-power mode (Stop/Sleep), the diagnosis bits of the switches and transceivers are not cleared. FO will stay activated if it was triggered before.
- When changing to SBC Stop Mode, the CAN control bits will not be modified.
- When changing to SBC Sleep Mode, the CAN control bits is modified if they were not Off or Wake Capable before.
- VCC2 will stay On when going to Sleep-/Stop Mode (configuration can only be done in Normal Mode). Diagnosis is active. In case of a failure the regulator is turned Off and no wake-up is issued.
- The configuration bits for VCC2 in stand-alone configuration are cleared in SBC Restart Mode. FO will stay activated if it was triggered before. Depending on the respective configuration, CAN transceivers is either Off, woken or still Wake Capable.
- Note: The detailed behavior of the respective SPI bits and control functions is described in Chapter 13.5, Chapter 13.6.and in the respective module chapter. The bit type be marked as 'rwh' in case the SBC will modify respective control bits.





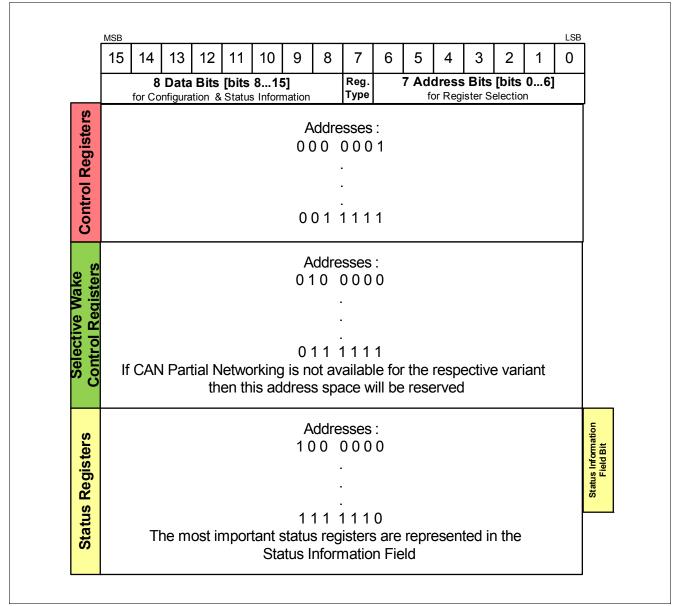


Figure 47SPI Register Mapping Structure

The detailed register mappings for control registers and status registers are shown in Table 34 and Table 37 respectively.

The detailed SPI bit mapping overview is shown in Figure 48.



UNC_PUP: CTRL OPD_UNC_PUP: 0 Instance Instance </th <th></th> <th>15</th> <th>14</th> <th>13</th> <th>12</th> <th>11</th> <th>10</th> <th>9</th> <th>8</th> <th>7</th> <th>60</th>		15	14	13	12	11	10	9	8	7	60
CONTROL CONTROL <t< th=""><th>Register Short Name</th><th>DZ</th><th>De</th><th>DE</th><th></th><th>D2</th><th>D2</th><th>D1</th><th>DO</th><th></th><th></th></t<>	Register Short Name	DZ	De	DE		D2	D2	D1	DO		
mit crim. MODE 1 Control of PLON VEC2 UN1 VEC2 UN1 VEC2 UN1 VEC2 UN1 VEC1 UN1 VEC1 RF 0 meanweil GET 000 UD CTRL OFT REST REF 70 ON Seasone Seasone </td <td></td> <td>UI</td> <td>D0</td> <td></td> <td></td> <td></td> <td>DZ</td> <td></td> <td>DU</td> <td>Wode</td> <td>A0/</td>		UI	D0				DZ		DU	Wode	A0/
INV. CTRL. Image: Diff. EVENT AST FO Image: Diff. Display OP Fill Image: Diff. EVENT AST OP TABLE 1 POSITIAL POSITIAL </td <td></td> <td></td> <td></td> <td>C</td> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>T</td>				C	1						T
mod CPRL DickCRSUM WO, TRME PL WO, TRME PL <t< td=""><td></td><td>MODE_1</td><td></td><td>reserved</td><td>VCC2_ON_1</td><td>VCC2_ON_0</td><td>VCC1_OV_RST</td><td>VCC1_RT_1</td><td></td><td></td><td></td></t<>		MODE_1		reserved	VCC2_ON_1	VCC2_ON_0	VCC1_OV_RST	VCC1_RT_1			
BBUS_CTRL_0 Impacted Impacted Impacted Impacted CALL CALL <thcal< th=""> <thc< td=""><td></td><td>reserved</td><td></td><td></td><td>reserved</td><td>reserved</td><td>CP_EN</td><td>reserved</td><td></td><td></td><td></td></thc<></thcal<>		reserved			reserved	reserved	CP_EN	reserved			
WK, CTRL, 8 Imagenetic TIMER, WK, DR, Imagenetic Im		CHECKSUM	WD_STM_EN_0	VVD_VVIN	WD_EN_WK_BUS	reserved					
UNI, CTRL, 1 INT GLOBAL mesoned VMLABD mesoned mesoned vmLABD		reserved	TIMER WK EN	reserved	reserved	reserved		CAN_1	CAN_U reserved		
UNK_PUPD_CTRL UPD_VIK_PUPD_0 Instanct Unstanct Unstanct UNK_PUPD_0 UPK_PUPD_0 Instanct UNK_PUPD_0		INT GLOBAL	reserved	WK MEAS	reserved	reserved	reserved	reserved	WK EN		00001
THER. CTRL. INSERT ON 1 THER. DN 1 THER. POR 2 THER. PER 0 INSERT PER 0 THER. PER 0 INSERT PER 0 INSERT PER 0 INSERT PER 0 INSERT PER 0 THER. PER 0 INSERT PER 0			GPIO WK PUPD 0	reserved	reserved	reserved	reserved	WK PUPD 1		read/write	00010
HW, CTRL, 1 RSTN, IFG mescand	BUS_CTRL_3	reserved	reserved	reserved	CAN_FLASH	reserved	reserved	reserved	reserved	read/write	00010
INV_CTRL_2 20HZ_FRED_1 20HZ_FRED_1 20HZ_FRED_1 SS_MOD_FR_1	TIMER_CTRL	reserved	TIMER_ON_2	TIMER_ON_1	TIMER_ON_0	TIMER_PER_3	TIMER_PER_2	TIMER_PER_1	TIMER_PER_0	read/write	00011
GP0 CTRL Description Canadration Canadration Canadration CPUID C2 CPUID C3 CPUID C3<			10001100				10001100	reserved	10001100		00011
PMM_CTRL PVM_DC_6		2MHZ_FREQ_2	2MHZ_FREQ_1	2MHz_FREQ_0	I_PEAK_TH	SS_MOD_FR_1	SS_MOD_FR_0	reserved	CFG_LOCK_1		
PMM_FREQ_CTRL matched Monthed		reserved	reserved	reserved	reserved	reserved	GPIO_2	GPIO_1	GPIO_0		
INV_CFRL_3 material material material material material material TBD. (C1_LML_AD, 1] C1_LML_AD, 1] C1_L		PWM_DC_7	PWM_DC_6	PWM_DC_5	PWM_DC_4	PWM_DC_3	PWM_DC_2				
SYS_STAT_CTRL_0 SYS_STAT_0 SY		reserved	reserved	reserved	reserved	reserved	TSD THR				
SYS_STAT_CTRL SYS_STAT_16 SYS_STAT_17 SYS_STAT_18 SYS_STAT_10		SYS STAT 7	SYS STAT 6	SYS STAT 5	SYS STAT 4	SYS STAT 3					00111
SWK, CTRL OSC. CAL TEML EN 1 TEML EN 0 CANTO MASK. meanwait											00111
SWK, CTRL OSC. CAL TEML EN 1 TEML EN 0 CANTO MASK. meanwait				SELE	CTIVE WAKE	REGISTERS					
SWM, BTLQ CTRL TBTT_7 TBT_6 TBT_4 TBT_3 TBT_7 TBT_1 TBT_0 Tendwreh Other SWM, BTLG CTRL ID28 ID27 ID28 D27 ID28 D27 ID28 D23 ID23 ID22 ID21 ID28 ID23 ID22 ID21 ID28 ID23 ID22 ID21 ID21 ID11 ID10 ID15 ID14 ID13 ID10 ID17 ID16 ID17	SWK CTRI	OSC CAL	TRIM EN 1			reserved	reserved	reserved	CEG VAL	read/write	01000
SWK, BJTL CTRL. meanwell reserved. SP-3 SP-2 SP-1 SP-0 reserved. SWK U3 CTRL. L028 L027 L028						TBIT 3	TBIT 2	TBIT 1			01000
SWK 103_CTRL 102a 1021 1031 1020 1036 1036 1037 1036 1037 1036 1037 1036 1037 1036 1037 1036 1037 1036 1037 1036 1037 1036 1038 1038 1036 1038		reserved	reserved								01000
SWK 102_CTRL 1020 019 018 017 1016 1015 1014 1013 restavete 1013 SWK 102_CTRL Freezered 104 103 102 011 003 102 011 003 RTR 102 RTR RTR RTR RTR RTR RTR RTRR RTR RTR		ID28	ID27		ID25	ID24	ID23	ID22	ID21		01000
SWK, DB, CTRL reserved ID4 ID3 ID2 ID1 ID0 RTR IDE read/write Oto1 SWK, MASK ID2 CTRL MASK ID2 MASK ID2 MASK ID2 MASK ID1 MASK ID2 MASK ID1 MASK ID2 MASK ID1 MASK ID2 MASK ID2 MASK ID2 MASK ID2 MASK ID2 MASK ID1 MASK ID2 MASK ID1 MASK ID2 MASK ID2 <t< td=""><td>SWK_ID2_CTRL</td><td>ID20</td><td>ID19</td><td>ID18</td><td>1011</td><td>ID16</td><td>1010</td><td>1011</td><td>1010</td><td>read/write</td><td>01001</td></t<>	SWK_ID2_CTRL	ID20	ID19	ID18	1011	ID16	1010	1011	1010	read/write	01001
SWK MASK ID2 MASK ID		ID12									01001
SWK MASK ID2 CTRL MASK ID19 MASK ID19 MASK ID16 MASK ID17 MASK ID16 MASK ID1 MASK ID		reserved									
SWK, MASK, JDC CTRL MASK, LD1 MASK, LD1 MASK, LD0 MASK, LD0 MASK, LD0 MASK, LD1											
SWK. NASK. ID0 CTRL meservedt											
SWK DLC_CTRL meanwell meanwell meanwell DLC.3 DLC.2 DLC.1 DLC.0 meanwell meanwell DITA7 SWK_DATAG_CTRL DATA7 7 DATA7 6 DATA7 7 DATA6 1 DATA7 0 meanwell 0011 SWK DATAS CTRL DATA7 7 DATA7 1 DATA6 6 DATA7 5 DATA7 2 DATA7 1 DATA7 0 meanwell 0011 SWK DATAS CTRL DATA7 7 DATA7 6 DATA7 2 DATA7 1 DATA7 0 meanwell 0101 SWK DATAS CTRL DATA7 7 DATA7 6 DATA7 4 DATA7 2 DATA7 2 DATA7 0 meanwell 0101 SWK DATAS CTRL DATA7 5 DATA7 4 DATA7 4 DATA7 2 DATA7 0 meanwell 0101 SWK DATAS CTRL DATA7 5 DATA7 4 DATA7 3 DATA7 4 DATA7 4 DATA7 4 DATA7 4 DATA7 4 DATA7 0 meanwell meanwell Meanwell minite								MASK_ID6	_		
SWK_DATAZ_CTRL DATAZ_0 DATAZ_0 DATAZ_0 DATAZ_0 mead/write OttaZ SWK_DATAS_CTRL DATAZ_7 DATAZ_0 DATAZ_0 mead/write OttaZ SWK_DATAS_CTRL DATAZ_7 DATAZ_0 DATAZ_0 mead/write OttaZ SWK_DATAS_CTRL DATAZ_7 DATAZ_0 DATAZ_0 DATAZ_0 mead/write OttaZ SWK_DATAS_CTRL DATAZ_7 DATAZ_0 DATAZ_2 DATAZ_1 DATAZ_0 mead/write OttaZ SWK_DATAZ_CTRL DATAZ_7 DATAZ_0 DATAZ_2 DATAZ_2 DATAZ_1 DATAZ_0 mead/write OttaZ SWK_DATAZ_CTRL DATAZ_7 DATAZ_0 DATAZ_5 DATAZ_4 DATAZ_3 DATAZ_2 DATAZ_1 DATAZ_0 mead/write OttaZ SWK_DATAZ_CTRL DATAZ_7 DATAZ_6 DATAZ_5 DATAZ_4 DATAZ_3 DATAZ_2 DATAZ_1 DATAZ_0 mead/write OttaZ SWK_DATAZ_CTRL DATAZ_7 DATAZ_6 DATAZ_4 DATAZ_3 DATAZ_4 DATAZ_4 <tdd< td=""><td></td><td>reserved</td><td>MASK_ID4</td><td>MASK_ID3</td><td>MASK_ID2</td><td></td><td></td><td>DIC 1</td><td></td><td></td><td></td></tdd<>		reserved	MASK_ID4	MASK_ID3	MASK_ID2			DIC 1			
SWK DATA6_CTRL DATA6_7 DATA6_6 DATA6_6 DATA6_4 DATA6_3 DATA6_1 DATA6_0 read/write 0111 SWK DATA6_CTRL DATA5_7 DATA5_6 DATA5_6 DATA5_4 DATA5_7 DATA5_6 TradAvite 0111 0111 0111 0114 DATA5_7 DATA5_6 DATA5_7 DATA5_6 DATA5_4 DATA4_4 DATA4_2 DATA4_1 DATA6_0 read/write 0110 SWK DATA2_CTRL DATA7_7 DATA2_6 DATA_2_6 DATA_4 DATA2_3 DATA2_1 DATA2_0 read/write 0110 SWK DATA6_CTRL DATA7_0 DATA6_6 DATA0_6 DATA0_6 DATA0_4 DATA0_3 DATA0_1 DATA0_1 <t< td=""><td></td><td>DATA7 7</td><td>DATA7 6</td><td>DATA7 5</td><td>DATA7 4</td><td></td><td></td><td></td><td></td><td></td><td></td></t<>		DATA7 7	DATA7 6	DATA7 5	DATA7 4						
SWK DATAS CTRL DATAS 7. DATAS 6. DATAS 6. DATAS 6. DATAS 7. DATAS 1. DATAS 0. Treadwrife 01011 SWK DATAS CTRL DATAS 7. DATAS 6. DATAS 4. DATAS 4. DATAS 2. DATAS 1. DATAS 0. Treadwrife 0101 SWK DATAS CTRL DATAS 7. DATAS 6. DATAS 5. DATAS 4. DATAS 3. DATAS 2. DATAS 1. DATAS 0. Treadwrife 0101 SWK DATAS CTRL DATAS 7. DATAS 6. DATAS 6. DATAS 6. DATAS 4. DATAS 2. DATAS 1. DATAS 2. DATAS 1. DATAS 2. DATAS 1. <											01011
SWM DATA4 CTRL DATA4 7 DATA4 6 DATA4 5 DATA4 3 DATA4 2 DATA4 1 DATA4 0 readwrine 0101 SWM DATA2 CTRL DATA3 7 DATA3 6 DATA3 5 DATA3 0 readwrine 0101 SWM DATA2 CTRL DATA2 7 DATA2 6 DATA2 5 DATA2 3 DATA2 1 DATA3 0 readwrine 0110 SWM DATA CTRL DATA1 7 DATA2 6 DATA1 5 DATA1 4 DATA1 2 DATA1 1 DATA1 0 readwrine 0110 SWK DATA CTRL DATA0 7 DATA 6 6 DATA0 5 DATA0 4 DATA0 2 DATA0 1 DATA0 0 readwrine 0110 SWK DATA CTRL DATA 7 DATA 6 6 DATA0 5 DATA0 4 DATA 2 DATA1 1 DATA1 0 readwrine 0110 SWK DATA CTRL DATA 7 DATA 6 DATA 6 DATA 4				DATA5 5							01011
SWK DATA2 CTRL DATA2 7 DATA2 6 DATA2 5 DATA2 3 DATA2 2 DATA2 1 DATA2 0 read/write D1100 SWK DATA3 CTRL DATA1 7 DATA1 6 DATA1 5 DATA1 5 DATA1 4 DATA1 3 DATA1 2 DATA1 1 DATA1 0 read/write D1100 SWK DATA3 CTRL DATA1 7 DATA0 6 DATA0 5 DATA0 4 DATA0 3 DATA0 2 DATA0 1 DATA0 0 read/write D1100 SWK DATA3 CTRL DATA0 6 DATA0 5 DATA0 4 DATA0 3 DATA0 2 DATA0 1 DATA0 0 read/write D1100 SWK DATA CTRL DATA0 5 DATA0 4 DATA0 7 PATA 7		DATA4 7	DATA4_6	DATA4_5	DATA4_4	DATA4_3	DATA4_2	DATA4_1	DATA4_0	read/write	01011
SWK DATAI CTRL DATAI 7. DATAI 6 DATAI 5. DATAI 4 DATAI 2. DATAI 1. DATAI 0. readwrite 01100 SWK DATAO CTRL DATAO 4. DATAO 3. DATAO 2. DATAO 1. DATAO 2.	SWK_DATA3_CTRL	DATA3_7	DATA3_6	DATA3_5	DATA3_4	DATA3_3	DATA3_2	DATA3_1	DATA3_0		01100
SWK DATA0_CTRL DATA0_6 DATA0_5 DATA0_5 DATA0_2 DATA0_1 DATA0_0 readwrite 01101 SWK_CAN_FD_CTRL reserved DIS_ERC_CNT RX_FLIT_BYP FD_FLITER_1 FD_FLITER_0 CAN_FD_EN readwrite 01101 SWK_OSC_TRIM_CTRL reserved TRIM_OSC_6 TRIM_OSC_6 </td <td>SWK_DATA2_CTRL</td> <td>DATA2_7</td> <td>DATA2_6</td> <td>DATA2_5</td> <td>DATA2_4</td> <td>DATA2_3</td> <td>DATA2_2</td> <td>DATA2_1</td> <td>DATA2_0</td> <td>read/write</td> <td>01100</td>	SWK_DATA2_CTRL	DATA2_7	DATA2_6	DATA2_5	DATA2_4	DATA2_3	DATA2_2	DATA2_1	DATA2_0	read/write	01100
SWK_CAN_ED_CTRL reserved DIS_ERR_CNT RX_FLIT_BYP FD_FLITER_2 FD_FLITER_1 FD_FLITER_0 CAN_FD_EN readvarie 01101 SUKCOSC_TRIM_CTRL reserved TRIM_OSC_6 TRIM_OSC_6 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>01100</td></t<>											01100
SELECTIVE WAKE TRIM &CONFIGURATIONS REGISTERS SWK OSC TRIM_CTRL reserved TRIM OSC 1 TRIM OSC CAL L 6 OSC CAL L 1 OSC C		DATA0_7	DATA0_6								
SWK OSC TRIM CTRL meanwaid TRIM OSC 6 TRIM OSC 5 TRIM OSC 4 TRIM OSC 3 TRIM OSC 1 TRIM OSC 0 read/write O1110 SWK OSC ALL H RX WK, SEL reserved r	SWK_CAN_FD_CIRL	reserved	reserved						CAN_FD_EN	read/write	01101
SWK_OPT_CTRL RX_WK_SEL reserved											
SWK OSC CAL H STAT OSC CAL H 7 OSC CAL H 6 OSC CAL H 5 OSC CAL H 4 OSC CAL H 2 OSC CAL H 1 OSC CAL H 0 read O1110 SWK OSC CAL L STAT OSC CAL L 7 OSC CAL L 6 OSC CAL L 5 OSC CAL L 2 OSC CAL L 1 OSC CAL L 0 read O1110 SWK COR CTRL1 reserved reserved reserved reserved CDR L 1 OSC CAL L 1 OSC CAL L 0 Freedomite O1110 SWK COR CTRL2 reserved reserved reserved reserved reserved reserved SEL OSC CLK J SEL OSC CLK 0 read/mite O1111 WK CDR LIMIT HIGH CTRL CDR LIM H 7 CDR LIM H 6 CDR LIM H 5 CDR LIM H 4 CDR LIM L 2 CDR LIM L 1 CDR LIM L 0 read/mite 01111 WC CDR LIMIT LOW_CTRL CDR LIM L 7 CDR LIM L 6 CDR LIM L 4 CDR LIM L 2 CDR LIM L 1 CDR LIM L 1 </td <td></td> <td>reserved</td> <td>TRIM_OSC_6</td> <td>TRIM_OSC_5</td> <td>TRIM_OSC_4</td> <td>TRIM_OSC_3</td> <td>TRIM_OSC_2</td> <td>TRIM_OSC_1</td> <td>TRIM_OSC_0</td> <td></td> <td>01110</td>		reserved	TRIM_OSC_6	TRIM_OSC_5	TRIM_OSC_4	TRIM_OSC_3	TRIM_OSC_2	TRIM_OSC_1	TRIM_OSC_0		01110
SWK OSC CAL L STAT OSC CAL L 7 OSC CAL L 6 OSC CAL L 5 OSC CAL L 4 OSC CAL L 3 OSC CAL L 1 OSC CAL L 0 read O1110 SWK CDR_CTRL1 reserved reserved reserved reserved SELFILT_1 SELFILT_0 reserved CDR_EN read/write 01111 WK CDR_CTRL1 reserved res			reserved	reserved	reserved	reserved	reserved	reserved	reserved		
SWK_CDR_CTRL1 reserved reserved reserved SELFILT_1 SELFILT_0 reserved CCR_EN read/write 01111 WK_CDR_CTRL2 reserved reserved reserved reserved reserved SEL_OSC_CLK_I SEL_OSC_CLK_0 read/write 01111 WK_CDR_LIMIT_LOW_CTRL CDR LIM H 7 CDR LIM L 6 CDR LIM L 5 CDR LIM L 4 CDR LIM L 3 CDR LIM L 1 CDR LIM L 0 read/write 01111 WC_CDR_LIMIT_LOW_CTRL CDR LIM L 6 CDR LIM L 5 CDR LIM L 4 CDR LIM L 3 CDR LIM L 1 CDR LIM L 0 read/write 01111 WL_CDR_LIMIT_LOW_CTRL CDR LIM L 6 CDR LIM L 5 CDR LIM L 4 CDR LIM L 3 CDR LIM L 1 CD											
SWK_CDR_CTRL2 reserved reserved reserved reserved reserved reserved SEL_OSC_CLK_I SEL_OSC_CLK_0 read/write 01111 WK_CDR_LIMIT_HIGH_CTRL CDR LIM H_7 CDR LIM H_6 CDR LIM H_5 CDR LIM H_4 CDR LIM H_2 CDR LIM H_1 CDR LIM H_0 read/write 01111 WK_CDR_LIMIT_LOW_CTRL CDR LIM L_7 CDR LIM L_6 CDR LIM L_4 CDR LIM L_3 CDR LIM L_1 CDR LIM L_0 read/write 01111 WK_CDR_LIMIT_LOW_CTRL CDR LIM L_7 CDR LIM L_6 CDR LIM L_4 CDR LIM L_3 CDR LIM L_1 CDR LIM L_0 Read/write 01111 WK_CDR_LIMIT_LOW_CTRL CDR LIM L_7 CDR LIM L_6 CDR LIM L_4 CDR LIM L_3 CDR LIM L_1 CDR LIM L_6 CDR LIM L_6 CDR LIM L_4 CDR LIM L_3 CDR LIM L_1 CDR LIM L_6 CDR LIM L_6 CDR LIM L_4 CDR LIM L_2 CDR LIM L_1 CDR LIM L_6											
WK CDR LIMIT HIGH CTRL CDR LIM H 7 CDR LIM H 6 CDR LIM H 5 CDR LIM H 4 CDR LIM H 3 CDR LIM H 2 CDR LIM H 1 CDR LIM H 0 read/write 01111 STATUS REGISTERS SUP STAT 1 reserved VS.UV VS.OV reserved reserved reserved reserved reserved VCC1 0V VCC1 UV read/dear 10000 SUP STAT 0 POR reserved reserved reserved reserved VCC2 UV VCC1 0V VCC1 UV read/dear 10000 THERM STAT reserved reserved reserved reserved VDC2 UV VCC1 0V VCC1 UV read/dear 10000 BUS STAT DEV_STAT 1 DEV_STAT 0 POR reserved reserved WD FAIL 1 WD FAIL 0 SPLFAIL FAILURE read/dear 10000 BUS STAT reserved reserved CAN TO SYSERR CAN FAIL 1 CAN FAIL 0 VCAN UV read/dear 10000 WK STAT 1 reserved reserved <td< td=""><td></td><td></td><td></td><td>reserved</td><td></td><td>SELFILI_I</td><td>SELFILI_0</td><td></td><td></td><td></td><td></td></td<>				reserved		SELFILI_I	SELFILI_0				
WK_CDR_LIMIT_LOW_CTRL CDR_LIM_L_7 CDR_LIM_L_6 CDR_LIM_L_5 CDR_LIM_L_4 CDR_LIM_L_3 CDR_LIM_L_2 CDR_LIM_L_1 CDR_LIM_L_0 read/write 01111 STATUS REGISTERS SUP_STAT_1 reserved VS_UV VS_OV reserved reserved reserved reserved VCC1_0V VCC1_UV read/clear 10000 THERM_STAT reserved reserved reserved TSD2_SAFE TSD2 TSD1 TPW read/clear 10000 DEV_STAT_1 DEV_STAT_1 Teserved reserved reserved TSD2_SAFE TSD2 TSD1 TPW read/clear 10000 BUS_STAT Teserved reserved reserved TSD2_SAFE TSD2 TSD1 TPW read/clear 10000 WK STAT_0 Teserved reserved reserved CAN FAIL WD_FAIL SWL FAIL WC AUL FAIL			10001100	CDR LIM H 5	10001100	CDR LIM H 3	CDR LIM H 2				
STATUS REGISTERS SUP STAT_1 reserved VCC1 0V VCC1 WARN reserved reserved VCC1 0V VCC1 VV VCC1 VV reserved VCC1 VV VCC1 VV reserved VCC1 VV reserved VCC1 VV VCC1 VV reserved VCC1 VV VCC1 VV reserved reserved reserved reserved reserved reserved reserved COLSPAN VVCC1 VV reserved VCC1 VV reserved reserved reserved reserved reserved reserved reserved reserved reserved	WK_CDR_LIMIT_LOW_CTRL										01111
SUP_STAT_1 reserved VS_UV VS_OV reserved reserved <th< td=""><td></td><td></td><td></td><td></td><td>STATUS REG</td><td></td><td></td><td></td><td></td><td></td><td></td></th<>					STATUS REG						
SUP_STAT_0 POR reserved reserved <t< td=""><td>SUP STAT 1</td><td>reserved</td><td>VSLIV</td><td></td><td>reserved</td><td>reserved</td><td>reserved</td><td>VCC1 OV</td><td>VCC1 WARN</td><td>read/clear</td><td>10000</td></t<>	SUP STAT 1	reserved	VSLIV		reserved	reserved	reserved	VCC1 OV	VCC1 WARN	read/clear	10000
THERM_STAT reserved reserved reserved reserved TSD2_SAFE TSD2 TSD1 TPW read/clear 10000 DEV_STAT DEV_STAT_1 DEV_STAT_0 Teserved reserved WD FAIL_1 WD FAIL_1 WD FAIL_1 CAN VU reserved		POR	reserved	reserved	VCC2 OT	VCC2 UV	VCC1 SC	reserved			10000
DEV_STAT DEV_STAT_1 DEV_STAT_0 reserved reserved WD_FAIL_1 WD_FAIL_0 SPI_FAIL FAILURE read/clear 10000 BUS STAT reserved reserved CANTO SYSERR CAN FAIL_1 CAN FAIL_0 VCAN UV read/clear 10000 WK_STAT_0 reserved reserve			reserved	reserved				TSD1			10000
BUS STAT reserved reserved reserved reserved CANTO SYSERR CAN FAL CAN FAL VCAN UV read/dear 10000 WK STAT_0 reserved reserved <td></td> <td></td> <td>DEV_STAT_0</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>10000</td>			DEV_STAT_0								10000
WK_STAT_1 reserved		reserved	reserved	10001100		SYSERR	CAN_FAIL_1	CAN_FAIL_0		read/clear	10001
WK_LVL_STAT SBC_DEV_LVL CFG0_STATE reserved GPIO_LVL reserved		reserved	reserved	CAN_WU		reserved	reserved	reserved	WK_WU		10001
GPIO_OC_STAT reserved GPIO_HS_LS_OC reserved reserved <td></td> <td>reserved</td> <td>reserved</td> <td>reserved</td> <td></td> <td>reserved</td> <td>reserved</td> <td>reserved</td> <td>reserved</td> <td></td> <td>10001</td>		reserved	reserved	reserved		reserved	reserved	reserved	reserved		10001
GPI0_OL_STAT reserved GPI0_HS_OL reserved read 11100 SWK		SBC_DEV_LVL		reserved	GPIO_LVL	reserved	reserved	reserved	WK_LVL		10010
SELECTIVE WAKE STATUS REGISTERS SWK_STAT reserved SYNC reserved CANSIL SWK.SET WUP WUF read 11100 SWK_COT_STAT reserved reserved ECNT 5 ECNT 4 ECNT 3 ECNT 1 ECNT 0 read 11100 SWK_COT_STAT1 N_AVG_11 N_AVG_10 N_AVG_9 N_AVG 8 N_AVG 7 N_AVG 6 N_AVG 4 read 11100 SWK_COT_STAT2 N_AVG_3 N_AVG_2 N_AVG 0 reserved rese		reserved		reserved	reserved	reserved	reserved	reserved	reserved		
SWK_STAT reserved SYNC reserved reserved CANSIL SWK SET WUP WUF read 11100 SWK_ECNT_STAT reserved reserved ECNT 5 ECNT 4 ECNT 3 ECNT 1 ECNT 0 read 11100 SWK_CDR_STAT1 N_AVG_11 N_AVG_10 N_AVG_9 N_AVG_8 N_AVG_6 N_AVG_5 N_AVG_4 read 11100 SWK_CDR_STAT2 N_AVG_3 N_AVG_10 N_AVG_9 N_AVG_8 N_AVG_7 N_AVG_6 N_AVG_5 N_AVG_4 read 11100 SWK_CDR_STAT2 N_AVG_3 N_AVG_2 N_AVG_8 n_AVG_9 reserved reserved reserved reserved read 11100 FAMILY AND PRODUCT REGISTERS FAM_PRO_STAT FAM_3 FAM_2 FAM_1 FAM_0 PRO_2 PRO_1 PRO_0 read 111111	GPIU_UL_STAT	reserved	GPIU_HS_UL	reserved	reserved	reserved	reserved	reserved	reserved	read/clear	10101
SWK_ECNT_STAT reserved ECNT_5 ECNT_4 ECNT_3 ECNT_2 ECNT_1 ECNT_0 read 11100 SWK_COR_STAT1 N_AVG_11 N_AVG_9 N_AVG_8 N_AVG_7 N_AVG_6 N_AVG_5 N_AVG_4 read 11100 SWK_COR_STAT2 N_AVG_3 N_AVG_2 N_AVG_9 N_AVG_8 N_AVG_8 N_AVG_6 N_AVG_6 N_AVG_4 read 11100 SWK_COR_STAT2 N_AVG_3 N_AVG_1 N_AVG_0 reserved reserved reserved reserved reserved reserved 1100 FAMLY AND PRODUCT REGISTERS FAM_1 FAM_0 PRO_2 PRO_1 PRO_0 read 11111				SELECTIV	E WAKE STA				1		
SWK_CDR_STAT1 N_AVG_11 N_AVG_0 N_AVG_8 N_AVG_7 N_AVG_6 N_AVG_5 N_AVG_4 read 11100 SWK_CDR_STAT2 N_AVG_3 N_AVG_2 N_AVG_1 N_AVG_0 reserved reserved<		reserved	SYNC	reserved	reserved						11100
SWK_CDR_STAT2 N_AVG_3 N_AVG_2 N_AVG_1 N_AVG_0 reserved reserved reserved read 11100 FAMILY AND PRODUCT REGISTERS FAM_PROD_STAT FAM_2 FAM_1 FAM_0 PROD_3 PROD_1 PROD_0 read 111100		reserved	reserved								
FAMILY AND PRODUCT REGISTERS FAM_PROD_STAT FAM_2 FAM_1 FROD_3 PROD_1 PROD_0 read 11111						N_AVG_7	N_AVG_6	N_AVG_5	N_AVG_4		
FAM_PROD_STAT FAM_3 FAM_2 FAM_1 FAM_0 PROD_3 PROD_2 PROD_1 PROD_0 read 11111	SWK_CDK_SIAI2	N_AVG_3	N_AVG_2			reserved	reserved	reserved	reserved	read	11100
						-					
Partial Networking Locked Bits (CFG_LOCK_0) Locked Bits (CFG_LOCK_1)	FAM_PROD_STAT	FAM_3	FAM_2	_						read	11111

Figure 48 Detailed TLE9461-3ES V33 SPI Bit Mapping



Serial Peripheral Interface

13.5 SPI Control Registers

READ/WRITE Operation (see also Chapter 13.3):

- The 'POR / Soft Reset Value' defines the register content after POR or SBC Reset.
- The 'Restart Value' defines the register content after SBC Restart, where 'x' means the bit is unchanged.
- One 16-bit SPI command consist of two bytes:
 - the 7-bit address and one additional bit for the register access mode and
 - following the data byte

The numbering of following bit definitions refers to the data byte and correspond to the bits D0...D7 and to the SPI bits 8...15. In case of 32-bit SPI commands, the data bytes from the next valid address are accessed (see also Figure 46).

- There are four different bit types:
 - 'r' = READ: read only bits (or reserved bits)
 - 'rw' = READ/WRITE: readable and writable bits
 - 'rwh' = READ/WRITE/Hardware: readable/writable bits, which can also be modified by the SBC hardware
 - 'rwl' = READ/WRITE/LOCKED: readable/writable bits, which are locked and cannot be modified anymore once the bit CFG_LOCK_0 in the HW_CTRL_1 or CFG_LOCK_1 in the HW_CTRL_2 register are set. The locking mechanism will remain active for all conditions (incl. Soft Reset) unless the bit CFG_LOCK_0 (for CP_EN or GPIO only) is cleared again;

for bits relating to CFG_LOCK_1 the locking mechanism will remain active until the device is powered down (VS < V_{POR} and can only be changed at the next device power-up.

After a soft reset command: If the respective lock bit is not set then the POR values are resumed; if the respective lock bit is set then the respective configurations stay unchanged, i.e. the soft reset has no effect on those configurations.

- Reserved bits are marked as "Reserved" and always read as "0". The respective bits shall also be programmed as "0".
- Reading a register is done byte wise by setting the SPI bit 7 to "0" (= Read Only).
- Writing to a register is done byte wise by setting the SPI bit 7 to "1".
- SPI control bits are in general not cleared or changed automatically. This must be done by the microcontroller via SPI programming. Exceptions to this behavior are stated at the respective register description and the respective bit type is marked with a 'h' meaning that the SBC is able to change the register content.

The registers are addressed wordwise.



Register Short Name	Register Long Name	Offset Address	Reset Value
General Control Register	'S		
M_S_CTRL	Mode- and Supply Control	000 0001 _B	Page 126
HW_CTRL_0	Hardware Control 0	000 0010 _B	Page 127
WD_CTRL	Watchdog Control	000 0011 _B	Page 128
BUS_CTRL_0	Bus Control 0	000 0100 _B	Page 129
WK_CTRL_0	Internal Wake Input Control	000 0110 _B	Page 130
WK_CTRL_1	External Wake Source Control	000 0111 _B	Page 130
WK_PUPD_CTRL	Wake Input Level Control	000 1000 _B	Page 131
BUS_CTRL_3	Bus Control 3	000 1011 _B	Page 131
TIMER_CTRL	Timer Control and Selection	000 1100 _B	Page 132
HW_CTRL_1	Hardware Control 1	000 1110 _B	Page 133
HW_CTRL_2	Hardware Control 2	000 1111 _B	Page 134
GPIO_CTRL	GPIO Configuration Control	001 0111 _B	Page 135
PWM_CTRL	PWM Configuration Control	001 1000 _B	Page 135
PWM_FREQ_CTRL	PWM Frequency Configuration Control	001 1100 _B	Page 136
HW_CTRL_3	Hardware Control 3	001 1101 _B	Page 136
SYS_STATUS_CTRL_0	System Status Control Low Byte	001 1110 _B	Page 137
SYS_STATUS_CTRL_1	System Status Control High Byte	001 1111 _B	Page 137
Selective Wake Control F	Registers		
SWK_CTRL	CAN Selective Wake Control	010 0000 _B	Page 138
SWK_BTL0_CTRL	SWK Bit Timing Logic Control1	010 0001 _B	Page 139
SWK_BTL1_CTRL	SWK Bit Timing Logic Control2	010 0010 _B	Page 139
SWK_ID3_CTRL	SWK WUF Identifier bits 2821	010 0011 _B	Page 139
SWK_ID2_CTRL	SWK WUF Identifier bits 2013	010 0100 _B	Page 140
SWK_ID1_CTRL	SWK WUF Identifier bits 125	010 0101 _B	Page 140
SWK_ID0_CTRL	SWK WUF Identifier bits 40	010 0110 _B	Page 140
SWK_MASK_ID3_CTRL	SWK WUF Identifier Mask bits 2821	010 0111 _B	Page 141
SWK_MASK_ID2_CTRL	SWK WUF Identifier Mask bits 2013	010 1000 _B	Page 141
SWK_MASK_ID1_CTRL	SWK WUF Identifier Mask bits 125	010 1001 _B	Page 141
SWK_MASK_ID0_CTRL	SWK WUF Identifier Mask bits 40	010 1010 _B	Page 142
SWK_DLC_CTRL	SWK Frame Data Length Code Control	010 1011 _B	Page 142
SWK_DATA7_CTRL	SWK Data7 Register	010 1100 _B	Page 143
SWK_DATA6_CTRL	SWK Data6 Register	010 1101 _B	Page 143
SWK_DATA5_CTRL	SWK Data5 Register	010 1110 _B	Page 143
SWK_DATA4_CTRL	SWK Data4 Register	010 1111 _B	Page 143
SWK_DATA3_CTRL	SWK Data3 Register	011 0000 _B	Page 144
SWK_DATA2_CTRL	SWK Data2 Register	011 0001 _B	Page 144

Table 34 Register Overview: SPI Control Register



Table 34 Register Overview: SPI Control Register (control)									
Register Short Name	Register Long Name	Offset Address	Reset Value						
SWK_DATA1_CTRL	SWK Data1 Register	011 0010 _B	Page 144						
SWK_DATA0_CTRL	SWK Data0 Register	011 0011 _B	Page 144						
SWK_CAN_FD_CTRL	CAN FD Configuration Control Register	011 0100 _B	Page 145						
SWK_OSC_TRIM_CTRL	SWK Oscillator Trimming Register	011 1000 _B	Page 146						
SWK_OPT_CTRL	Selective Wake Options Register	011 1001 _B	Page 146						
SWK_OSC_CAL_H_STAT	SWK Oscillator Calibration High Register	011 1010 _B	Page 146						
SWK_OSC_CAL_L_STAT	SWK Oscillator Calibration Low Register	011 1011 _B	Page 147						
SWK_CDR_CTRL1	CDR Control 1 Register	011 1100 _B	Page 147						
SWK_CDR_CTRL2	CDR Control 2 Register	011 1101 _B	Page 148						
SWK_CDR_LIMIT_HIGH_ CTRL	SWK CDR Upper Limit Control	011 1110 _B	Page 149						
SWK_CDR_LIMIT_LOW_C TRL	SWK CDR Lower Limit Control	011 1111 _B	Page 149						

Table 34 Register Overview: SPI Control Register (cont'd)



13.5.1 General Control Registers

M_S_CTRL

Mode- and Supply Control (Address 000 0001_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: 0000 00xx_B

7	6	5	4	3	2	1	0
мс	DDE	Reserved	VCC2	_ON	VCC1_OV_RST	VCC1	RT
rv	vh	r	rw	'n	rwh	rv	V

Field	Bits	Туре	Description						
MODE	7:6	rwh	 SBC Mode Control 00_B , SBC Normal Mode 01_B , SBC Sleep Mode 10_B , SBC Stop Mode 11_B , SBC Reset: Soft Reset is executed (configuration of RSTN triggering in bit SOFT_RESET_RST) 						
Reserved	5	r	Reserved, always reads as 0						
VCC2_ON	4:3	rwh	VCC2 Mode Control 00_B , VCC2 Off 01_B , VCC2 On in Normal Mode 10_B , VCC2 On in Normal and Stop Mode 11_B , VCC2 always On (except in SBC Init - if not in SBC Development Mode, SBC Restart and Fail-Safe Mode)						
VCC1_OV_R ST	2	rwh	 VCC1 Over Voltage leading to Restart / Fail-Safe Mode enable 0_B , VCC1_ OV is set in case of VCC1_OV; no SBC Restart or Fail-Safe is entered for VCC1_OV 1_B , VCC1_ OV is set in case of VCC1_OV; depending on the device configuration SBC Restart or SBC Fail-Safe Mode is entered (see Chapter 5.1.1); 						
VCC1_RT	1:0	rw	$\begin{array}{c} \textbf{VCC1 Reset Threshold Control} \\ \textbf{00}_{B} , Vrt1 \text{ selected (highest threshold)} \\ \textbf{01}_{B} , Vrt2 \text{ selected} \\ \textbf{10}_{B} , Vrt3 \text{ selected} \\ \textbf{11}_{B} , Vrt4 \text{ selected} \end{array}$						

Notes

1. It is not possible to change from Stop to Sleep Mode via SPI Command. See also the State Machine Chapter

- 2. In a transition from SBC Stop to SBC Normal Mode a change of the bits [4:0] is ignored and the SPI_FAIL bit is set. The transition to SBC Normal Mode is executed.
- 3. After entering SBC Restart Mode, the MODE bits is automatically set to SBC Normal Mode. The VCC2_ON bits is automatically set to Off after entering SBC Restart Mode and after over temperature (OT).
- 4. The SPI output will always show the previously written state with a Write Command (what has been programmed before)
- 5. When in SBC Development Mode the POR/Soft Reset value of VCC2_ON = '11', i.e. VCC2 is On in SBC Init Mode but is switched Off with a Soft Reset command



HW_CTRL_0

Hardware Control 0 (Address 000 0010_B) POR / Soft Reset Value: 0y00 0y00_B;

Restart Value: 0x00 0x0x_B

7	6	5	4	3	2	1	0
Reserved	SOFT_RESET_ RST	FO_ON	Rese	erved	CP_EN	Reserved	CFG1
r	rwl	rwh	•	r	rwl	r	rw

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
SOFT_RESE T_RST	6	rwl	Soft Reset Configuration0B, RST is triggered (pulled Low) during a Soft Reset1B, no RST trigger during a Soft Reset
FO_ON	5	rwh	 Failure Output Activation 0_B , FO not activated by software, FO is activated by specified failures (see Chapter 11.1.1) 1_B , FO activated by software (via SPI), only if configured as FO
Reserved	4:3	r	Reserved, always reads as 0
CP_EN	2	rwl	Charge Pump Output Enable 0 _B , Charge Pump is Off 1 _B , Charge Pump Output is enabled (see Chapter 5)
Reserved	1	r	Reserved, always reads as 0
CFG1	0	rw	Configuration Select 1 (see also Table 5)0B, Depending on hardware configuration, SBC Restart or Fail- Safe Mode is reached after the 2. watchdog trigger failure (=default) - Config 3/41B, Depending on hardware configuration, SBC Restart or Fail- Safe Mode is reached after the 1. watchdog trigger failure - Config 1/2

Notes

- Clearing the FO_ON bit will not disable the FO output in case a failure occurred which triggered the FO output. In this case the FO output have to be disabled by clearing the FAILURE bit. If the FO_ON bit is set by the software then it is cleared by the SBC after SBC Restart Mode was entered and the FO output is disabled (if no failures occurred which triggered the fail outputs). See also Chapter 11 for FO activation and deactivation.
- 2. In case the CFG_LOCK_1 bit is set, then the soft reset value for SOFT_RESET_RST will stay unchanged, i.e. 'x'; the same applies if CFG_LOCK_0 is set: then the soft reset value of the bit CP_EN will stay unchanged, i.e. 'x'. Therefore, the respective soft reset values are marked as 'y'.



WD_CTRL

Watchdog Control (Address $000\ 0011_B$) POR / Soft Reset Value: $0001\ 0100_B$;

Restart Value: x0xx 0100_B

7	6	5	4	3	2	1	0
CHECKSUM	WD_STM_EN_ 0	WD_WIN	WD_EN_WK_ BUS	Reserved		WD_TIMER	
rw	rwh	rw	rw	r		rwh	

Field	Bits	Туре	Description
CHECKSUM	7	rw	Watchdog Setting Check Sum BitThe sum of bits 7:0 needs to have even parity (see Chapter 12.2.3)00B, Counts as 0 for checksum calculation11B, Counts as 1 for checksum calculation
WD_STM_ EN_0	6	rwh	Watchdog Deactivation during Stop Mode, bit 0 (Chapter 12.2.4)00B, Watchdog is active in Stop Mode11B, Watchdog is deactivated in Stop Mode
WD_WIN	5	rw	Watchdog Type Selection0B, Watchdog works as a Time-Out watchdog1B, Watchdog works as a Window watchdog
WD_EN_ WK_BUS	4	rw	 Watchdog Enable after Bus (CAN) Wake-up in SBC Stop Mode 0_B , Watchdog will not start after a CAN wake-up 1_B , Watchdog starts with a long open window after CAN Wake
Reserved	3	r	Reserved, always reads as 0
WD_TIMER	2:0	rwh	Watchdog Timer Period 000_B , 10ms 001_B , 20ms 010_B , 50ms 011_B , 100ms 100_B , 200ms 101_B , 500ms 110_B , 1000ms 110_B , 1000ms

Notes

1. See also Chapter 12.2.4 for more information on disabling the watchdog in SBC Stop Mode.

- 2. See Chapter 12.2.5 for more information on the effect of the bit WD_EN_WK_BUS.
- 3. See Chapter 12.2.3 for calculation of checksum.



BUS_CTRL_0 Bus Control 0 (Address $000 \ 0100_B$) POR / Soft Reset Value: $0000 \ 0000_B$;

Restart Value: 0000 0yyy_B

7	6	5	4	3	2	1	0
	I.	Reserved	I	I		CAN	
<u>I</u>		r			<u> </u>	rwh	

Field	Bits	Туре	Description	
Reserved	7:3	r	Reserved, always reads as 0	
CAN	2:0			

Notes

- 1. The reset values for the CAN transceivers are marked with 'y' because they will vary depending on the cause of change see below.
- 2. see Figure 24 for detailed state changes of CAN Transceiver for different SBC modes.
- 3. The bit CAN_2 is not modified by the SBC but can only be changed by the user. Therefore, the bit type is 'rw' compared to bits CAN_0 and CAN_1.
- 4. In case SYSERR = 0 and the CAN transceiver is configured to 'x11' while going to SBC Sleep Mode, it is automatically set to Wake Capable ('x01'). The SPI bits are changed to Wake Capable. If configured to 'x10' and SBC Sleep Mode is entered, then the transceiver is set to Wake Capable, while it will stay in Receive Only Mode when it had been configured to 'x10' when going to SBC Stop Mode. If it had been configured to Wake Capable or Off then the mode will remain unchanged. The Receive Only Mode has to be selected by the user before entering SBC Stop Mode. Please refer to Chapter 5.6.4 for detailed information on the Selective Wake mode changes.
- 5. Failure Handling Mechanism: When the device enters Fail-Safe Mode due to a failure (TSD2, WD-Failure,...), then BUS_CTRL_0 is modified by the SBC to '0000 0x01' to ensure that the device can be woken again. See also the description in Chapter 5.6.4.5 and for WK_CTRL_1 for other wake sources when entering SBC Fail-Safe Mode.
- 6. When in SBC Development Mode the POR/Soft Reset value of CAN = '011'



WK_CTRL_0

Internal Wake Input Control (Address 000 0110_B) POR / Soft Reset Value: 0000 0000_B ; Restart

Restart Value: 0x00 0000_B

7	6	5	4	3	2	1	0
Reserved	TIMER_WK_E N		Reserved	1	WD_STM_EN_ 1	Rese	rved
r	rw		r		rwh		r

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
EN 0 _B , Timer wake-up disabled			
Reserved	5:3	r	Reserved, always reads as 0
WD_STM_ EN_1	2	rwh	Watchdog Deactivation during Stop Mode, bit 1 (Chapter 12.2.4)00B, Watchdog is active in Stop Mode11001010101010100 <t< td=""></t<>
Reserved	1:0	r	Reserved, always reads as 0

Note: WD_STM_EN_1 will also be cleared when changing from SBC Stop to Normal Mode

WK_CTRL_1

External Wake Source Control (Address	000 0111 _B)
POR / Soft Reset Value: 0000 0001 _B ;	Restart Value: x0x0 000x _B

7	6	5	4	3	2	1	0
INT_GLOBAL	Reserved	WK_MEAS		Rese	erved		WK_EN
rw	r	rw	· · ·		r	•	rw

Field	Bits	Туре	Description					
INT_ GLOBAL	7	rw	 Global Interrupt Configuration (see also Chapter 10.1) O_B , Only wake sources trigger INTN (default) 1_B , All status information register bits will trigger INTN (including all wake sources) 					
Reserved	6	r	Reserved, always reads as 0					
WK_MEAS	5	rw	Wake / Voltage Sensing Selection (see also Chapter 9.2.4)00B, Wake-up functionality enabled for WK1B, Voltage sensing functionality enabled, no wake-up events are generated					
Reserved	4:1	r	Reserved, always reads as 0					
WK_EN	0	rw	WK Wake Source Control0B, WK wake-up disabled1B, WK is enabled as a wake source					



Notes

- 1. WK_MEAS is by default configured for standard WK functionality (Static Sense on WK). If WK_MEAS is set and FO is not activated then the bits WK_EN and GPIO_CTRL are ignored. If FO is activated then WK_MEAS cannot be set to '1' and SPI_Fail is set. If the bit is set to '1' then the measurement function is enabled during Normal Mode & the bits WK_EN are ignored. The bits WK_LVL and GPIO_LVL bits are not updated and are reset.
- 2. The wake source CAN is selected in the register BUS_CTRL_0 by setting the respective bits to 'Wake Capable'
- 3. Failure Handling Mechanism: When the device enters SBC Fail-Safe Mode due to a failure (TSD2, WD-Failure,...) and WK_MEAS = '0', the WK_CTRL_1 is modified by the SBC to 'x0x0 0001' in order to ensure that the device can be woken again. In case WK_MEAS is '1' then WK will not be available as an automatic wake source in SBC Fail-Safe Mode.

WK_PUPD_CTRL

Wake Input Level Control (Address 000 1000_B) POR / Soft Reset Value: 0000 0000_B ; Restart Value: xx00 $00xx_B$

7	6	5	4	3	2	1	0
GPIO_W	GPIO_WK_PUPD		Rese	erved	T	WK_	PUPD
r	rw			r		r	W

Field	Bits	Туре	Description
GPIO_WK_P UPD	7:6	rw	 GPIO WK Pull-Up / Pull-Down Configuration (only if GPIO configured as WK) 00_B , No pull-up / pull-down selected 01_B , Pull-down resistor selected 10_B , Pull-up resistor selected 11_B , Automatic switching to pull-up or pull-down
Reserved	5:2	r	Reserved, always reads as 0
WK_PUPD	1:0	rw	 WK Pull-Up / Pull-Down Configuration 00_B , No pull-up / pull-down selected 01_B , Pull-down resistor selected 10_B , Pull-up resistor selected 11_B , Automatic switching to pull-up or pull-down

BUS_CTRL_3 Bus Control 3 (Address $000\ 1011_B$) POR / Soft Reset Value: $0000\ 0000_B$;

Restart Value: 000x 0000_B

7	6	5	4	3	2	1	0
	Reserved		CAN_Flash		Rese	rved	
	r		rw	L		r	

Field	Bits	Туре	Description
Reserved	7:5	r	Reserved, always reads as 0

131



Field	Bits	Туре	Description
CAN_Flash	4	rw	HS-CAN Flash Mode Activation0B, Flash Mode disabled: CAN communication up to 5MBaud1B, Flash Mode enabled: CAN communication for higher than 5MBaud (higher emission on CAN bus - no slew rate control)
Reserved	3:0	r	Reserved, always reads as 0

Note: The electrical parameters for the CAN FD communication are ensured up to 5MBaud for the default setting (CAN_Flash is cleared). In case higher communication rates are required then CAN_Flash can be set.

TIMER_CTRL

Timer Control and Selection (Address 000 1100_B)POR / Soft Reset Value: 0000 0000_B ;Restart Value: 0000 0000_B

7	6	5	4	3	2	1	0
Reserved		TIMER_ON			TIMER	PER	1
r	1	rwh		1	rw	/h	<u> </u>

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
TIMER_ ON	6:4	rwh	Timer On-Time Configuration 000_B , Off / Low (timer not running, HSx output is Low) 001_B , 0.1ms On-time 010_B , 0.3ms On-time 011_B , 1.0ms On-time 100_B , 10ms On-time 101_B , 20ms On-time 110_B , 0ff / High (timer not running, HSx output is High) 111_B , reserved
TIMER_ PER	3:0	rwh	Timer Period Configuration 0000_B , 10ms 0001_B , 20ms 0010_B , 50ms 0011_B , 100ms 0100_B , 200ms 0101_B , 500ms 0101_B , 500ms 0111_B , 2s 1000_B , 5s 1001_B , 10s 1010_B , 20s 1011_B , 50s 1100_B , 100s 1101_B , 200s 1110_B , 500s 1111_B , 1000s



Notes

- 1. The timer must be first assigned and is then automatically activated as soon as the On-time is configured.
- 2. If Cyclic Sense is selected and the GPIO HS switch is cleared during SBC Restart Mode then also the timer settings (period and On-time) are cleared to avoid incorrect switch detection. However, the timer settings are not cleared in case of failure not leading to SBC Restart Mode. This must be considered by the application.
- 3. in case the timer is set as wake sources and Cyclic Sense is running, then both Cyclic Sense and Cyclic Wake are active at the same time.
- 4. A new timer configuration will become active immediately, i.e. as soon as CSN goes High.

HW_CTRL_1

```
Hardware Control 1 (Address 000 1110<sub>B</sub>)
POR / Soft Reset Value: y0yy y000<sub>B</sub>;
```

Restart Value: x0xx x000_B

7	6	5	4	3	2	1	0
RSTN_HYS	Reserved	TSD2_DEL	RSTN_DEL	CFG_LOCK_0		Reserved	
rwl	r	rwl	rwl	rw		r	·

Field	Bits	Туре	Description
RSTN_HYS	7	rwl	 VCC1 Undervoltage Reset Hysteresis Selection (see also Chapter 12.5.1 for more information) 0_B , default hysteresis applies as specified in the electrical characteristics table 1_B , the highest rising threshold (Vrt1,r) is always used for the release of the undervoltage reset
Reserved	6	r	Reserved, always reads as 0
TSD2_DEL	5	rwl	 TSD2 Minimum Waiting Time Selection 0_B , Minimum waiting time until TSD2 is released again is always 1s
RSTN_DEL	4	rwl	$\begin{array}{l} \textbf{Reset Delay Time Selection} \\ \textbf{0}_{B} & , \text{The extended reset delay time } \textbf{t}_{\textbf{RD1}} \text{is selected (default)} \\ \textbf{1}_{B} & , \text{The reduced } \textbf{t}_{\textbf{RD2}} \text{ reset delay time is selected} \end{array}$
CFG_LOCK_ 0	3	rw	Configuration Lock Bit - Level 0 0 _B , CP_EN and GPIO can be modified 1 _B , CP_EN and GPIO is locked and cannot be modified
Reserved	2:0	r	Reserved, always reads as 0

Notes

1. See also Chapter 12.5 for selection of VCC1 undervoltage hysteresis

- 2. See also Chapter 12.8 for minimum waiting time in case of an TSD2 event
- 3. The bit CFG_LOCK_0 is used to prevent an unintentional modification of the charge pump activation bit CP_EN and the GPIO configuration bits GPIO. In case the charge pump output state or the GPIO configuration must be changed then it is necessary to clear CFG_LOCK_0. The other lockable bits are controlled by the lock bit CFG_LOCK_1. In case either lock bit is set then the respective locked bits cannot be changed by a soft reset. Therefore, the respective soft reset values are marked as 'y'.
- 4. In case CFG_LOCK_1 bit are set, then the respective soft reset value is like the Restart value.



HW_CTRL_2 Hardware Control 2

Hardware Control 2 (Address 000 1111_B) POR Value: 0100 0000_B; Restar

Restart Value/Soft Reset Value: xxxx xx0x_B

7	6	5	4	3	2	1	0
	2MHZ_FREQ	I	I_PEAK_TH	SS_MC	DD_FR	Reserved	CFG_LOCK_1
<u> </u>	rwl		rwl	rv	vl	rwrr	rwl

Field	Bits	Туре	Description
2MHZ_FREQ		rwl	Charge Pump Switching Frequency Setting 000_B , 1.8MHz 001_B , 2.0MHz (default value) 010_B , 2.2MHz 011_B , 2.4MHz 100_B , Reserved 101_B , Reserved 101_B , Reserved 110_B , Reserved
I_PEAK_TH	4	rwl	111 _B , Reserved VCC1 Active Peak Threshold Selection 0 _B , low VCC1 active peak threshold selected (ICC1,peak_1) 1 _B , high VCC1 active peak threshold selected (ICC1,peak_2).
SS_MOD_FR	3:2	rwl	$\begin{array}{c} \textbf{Spread Spectrum Modulation Frequency Setting of integrated} \\ \textbf{2MHz oscillator for charge pump} \\ 00_{\text{B}} , \text{Spread Spectrum disabled} \\ 01_{\text{B}} , 15.625 \text{kHz Modulation Frequency} \\ 10_{\text{B}} , 31.250 \text{kHz Modulation Frequency} \\ 11_{\text{B}} , 62.500 \text{kHz Modulation Frequency} \end{array}$
Reserved	1	r	Reserved, always reads as 0
CFG_LOCK_ 1	0	rwl	 Configuration Lock Bit - Level 1 0_B , Bits with bit type 'rwl' (except CP_EN and GPIO) can be modified 1_B , Bits with bit type 'rwl' (except CP_EN and GPIO) are locked and cannot be modified anymore until next device power-up.

Notes

- The configuration locking becomes effective after CSN changes from Low to High once the CFG_LOCK_1 bit was set. The locking is active until the next device power-up (VS < V_{POR,f}), i.e. also CFG_LOCK_1 is locked in this case. The CFG_LOCK_1 will stay unchanged by a soft reset.
- 2. After t_{RD1} has expired, the default value is resumed after power-up or the configured value after SBC Sleep- or Fail-Safe Mode. In case the CFG_LOCK_1 bit is set, then the soft reset value is like the Restart value.

GPIO_CTRLGPIO Configuration Control (Address 001 0111_B)POR Value: 0000 0000_B ;Restart Value/Soft Reset Value: 0000 $0yyy_B$

7	6	5	4	3	2	1	0
	I	Reserved	I	I		GPIO	
	I	r	1	1		rwhl	

Field	Bits	Туре	Description
Reserved	7:3	r	Reserved, always reads as 0
GPIO	2:0	rwhl	GPIO Configuration
			000 _B , FO selected (default)
			001 _B , FO selected
			010 _B , FO selected
			011 _B , High-Side controlled by TIMER (Cyclic Sense)
			100 _B , Off
			101 _B , Wake input enabled (16us static filter)
			$110_{\rm B}$, Low-Side Switch controlled by PWM
			$111_{\rm B}$, High-Side Switch controlled by PWM

Notes

- 1. The Restart and Soft Reset Value depends on the respective GPIO configuration. Therefore the bit type is also 'rwhl' and the restart value is 'y'. See also Table 29 in Chapter 11.1.2 for more information on the GPIO behavior for the different SBC modes and Restart behavior.
- 2. In case the CFG_LOCK_0 bit is set, then the soft reset value is like the Restart value.
- 3. If GPIO is configured as a wake input, then it is a default wake source in SBC Fail-Safe Mode .

PWM_CTRL

PWM Configuration Control (Address 001 1000_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0
		I	PWM	1_DC	Ι	Ι	
		<u> </u>	r	W	I	I	<u>i</u>

Field	Bits	Туре	Description
PWM_DC	7:0	rw	PWM Duty Cycle Setting (bit0 = LSB; bit7 = MSB)
			0000 0000 _B , 100% Off, i.e. HS/LS = Off
			xxxx xxxx _B , On with duty cycle fraction of 255
			1111 1111 _B , 100% On, i.e. HS/LS always On

Notes

- 1. 0% and 100% duty cycle settings are used to have the switch turned On or Off respectively.
- 2. A new duty cycle configuration will become effective after the previous period is completed.
- 3. The desired duty cycle should be set first before GPIO is enabled as PWM HS or PWM LS.



PWM_FREQ_CTRLPWM Frequency Configuration Control (Address 001 1100 $_B$)POR / Soft Reset Value: 0000 0000 $_B$;Restart Value: 0000 000x $_B$

7	6	5	4	3	2	1	0
	Reserved					PWM_	FREQ
	1	1	1	I.	1		1
	r						N

Field	Bits	Туре	Description
Reserved	7:2	r	Reserved, always reads as 0
PWM_FREQ	1:0	rw	$\begin{array}{l} \textbf{Spread Spectrum Modulation Frequency Setting}\\ 00_{B} &, 100\text{Hz configuration}\\ 01_{B} &, 200\text{Hz configuration}\\ 10_{B} &, 325\text{Hz configuration}\\ 11_{B} &, 400\text{Hz configuration} \end{array}$

Note: A frequency change will become effective after the previous period is completed

HW_CTRL_3Hardware Control 3 (Address 001 1101_B)POR Value: 0000 0001_B;Restart Value/Soft Reset Value: 0000 $0xxx_B$

7	6	5	4	3	2	1	0
	Reserved			I	TSD_THR	ICC1_L	IM_ADJ
		r		I	rwl	٢١	wl

Field	Bits	Туре	Description
Reserved	7:3	r	Reserved, always reads as 0
TSD_THR	2	rwl	Thermal Shutdown Threshold (TSD1 & TSD2) Configuration0B, Default shutdown threshold selected1B, higher shutdown threshold selected
ICC1_LIM_A DJ	1:0	rwl	 Configuration of ICC1 current limitation 00_B , 1 step down from default value (-25% of typ. default) 01_B , default value (typ. 1000mA) 10_B , 1 step up form default value (+20% of default), setting not recommended 11_B , 2 steps up from default value (+50% of default), setting not recommended

Notes

1. In case the CFG_LOCK_1 bit is set, then the soft reset value is like the Restart value., i.e. the configuration stays unchanged.



	-				-					
7	6	5	4	3	2	1	0			
SYS_STAT_L										
	İ.	İ.	l	İ.	1					
rw										

Field	Bits	Туре	Description
SYS_STAT_L	7:0	rw	System Status Control Low Byte (bit0=LSB; bit7=MSB)
			Dedicated byte for system configuration, access only by microcontroller. Cleared after power up and Soft Reset

Notes

- 1. The SYS_STATUS_CTRL_0 register is an exception for the default values, i.e. it will keep its configured value also after a Soft Reset.
- This byte is intended for storing system configurations of the ECU by the microcontroller and is only writable in SBC Normal Mode and readable in SBC Stop Mode. The byte is not accessible by the SBC and contents are kept also after SBC Fail-Safe, Restart Mode or after Soft Reset. It allows the microcontroller to store system configuration without loosing the data as long as the SBC supply voltage is above V_{POR,f}.

SYS_STATUS_CTRL_1

System Status Control High Byte (Address $001 \ 1111_B$)POR Value: $0000 \ 0000_B$;Restart Value/Soft Reset Value: xxxx xxxx_B

7	6	5	4	3	2	1	0				
	SYS_STAT_H										

Field	Bits	Туре	Description
SYS_STAT_H	7:0	rw	System Status Control High Byte (bit8=LSB; bit15=MSB) Dedicated byte for system configuration, access only by microcontroller. Cleared after power up and Soft Reset

Notes

1. The SYS_STATUS_CTRL_1 register has the same functionality and behavior as SYS_STATUS_CTRL_0.



13.5.2 Selective Wake Control Registers

SWK_CTRL

CAN Selective Wake Control (Address 010 0000_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx 0000_B

7	6	5	4	3	2	1	0
OSC_CAL	TRIM	_EN	CANTO_MASK		Reserved		CFG_VAL
rw	rv	V	rw		r		rwh

Field	Bits	Туре	Description
OSC_CAL	7	rw	Oscillator Calibration Mode0B, Oscillator Calibration is disabled1B, Oscillator Calibration is enabled
TRIM_EN	6:5	rw	 (Un)locking mechanism of oscillator recalibration 00_B , locked 01_B , locked 10_B , locked 11_B , unlocked
CANTO_ MASK	4	rw	 CAN Time Out Masking 0_B , CAN time-out is masked - no interrupt (on pin INTN) is triggered 1_B , CAN time-ut is signaled on INTN
Reserved	3:1	r	Reserved, always reads as 0
CFG_VAL	0	rwh	SWK Configuration valid0B, Configuration is not valid (SWK not possible)1B, SWK configuration valid, needs to be set to enable SWK

Notes

- 1. TRIM_EN unlocks the oscillation calibration mode. Only the bit combination '11' is the valid unlock. The pin TXDCAN is used for oscillator synchronisation (trimming).
- 2. The microcontroller needs to validate the SWK configuration and set 'CFG_VAL' to '1'. The SBC will only enable SWK if CFG_VAL' to '1'. The bit is cleared automatically by the SBC after a wake-up or POR or if a SWK configuration data is changed by the microcontroller.
- 3. CANTO bit will only be updated inside BUS_STAT while CAN_2 is set. Therefore, an interrupt is only signalled upon occurrence of CANTO while CAN_2 (SWK is enabled) is set in SBC Normal and Stop Mode.
- 4. TRIM_EN also unlocks the writing to the SWK_OPT_CTRL register in order to enable the alternate low-power Receiver for Selective wake to optimize the quiescent current consumption. Only the bit combination '11' unlocks the calibrations / configurations.



SWK_BTL0_CTRL SWK Bit Timing Logic Control1 (Address 010 0001_B) POR / Soft Reset Value: 1010 0000_B; Restart Va

Restart	Value: x	XXX XXXX _B
---------	----------	-----------------------

7	6	5	4	3	2	1	0				
TBIT											
		I	1								
	rw										

Field	Bits	Туре	Description
ТВІТ	7:0	rw	Number of Time Quanta in a Bit Time
			Represents the number of time quanta in a bit time. Quanta is depending on SEL_OSC_CLK<1:0> from the SWK_CDR_CTRL2 register.

$$\label{eq:swk_btll_CTRL} \begin{split} & \text{SWK_BTL1_CTRL} \\ & \text{SWK Bit Timing Control2 (Address 010 0010_B)} \\ & \text{POR / Soft Reset Value: 0011 0011_B;} \\ & \text{Restart Value: xxxx xxxx_B} \end{split}$$

7	6	5	4	3	2	1	0
Reserved			Ι	S	Ρ	1	I
	I		1	I	I	ļ	
I	r			r	N		

Field	Bits	Туре	Description
Reserved	7:6	r	Reserved, always reads as 0
SP	5:0	rw	Sampling Point Position Represents the sampling point position (fractional number < 1). Example: 0011 0011 = 0.796875 (~80%)

SWK_ID3_CTRL

SWK WUF Identifier bits 28...21 (Address $010\ 0011_B$) POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0		
ID28_21									

Field	Bits	Туре	Description
ID28_21	7:0	rw	WUF Identifier Bits 2821

Note: Please note the configuration of the standard identifier and extended identifier. The standard identifier is configured to the bits ID18...ID28

$\label{eq:swk_identifier} \begin{array}{l} {\rm SWK_ID2_CTRL} \\ {\rm SWK} \, {\rm WUF} \, {\rm Identifier} \, {\rm bits} \, 20...13 \, ({\rm Address} \, 010 \, 0100_{\rm B}) \\ {\rm POR} \, / \, {\rm Soft} \, {\rm Reset} \, {\rm Value:} \, 0000 \, 0000_{\rm B}; \\ \end{array} \\ \begin{array}{l} {\rm Restart} \, {\rm Value:} \, {\rm xxxx} \, {\rm xxxx}_{\rm B} \\ \end{array}$

7	6	5	4	3	2	1	0	
ID20_13								
rw								

Field	Bits	Туре	Description
ID20_13	7:0	rw	WUF Identifier Bits 2013

SWK_ID1_CTRL

SWK WUF Identifier bits 12...5 (Address 0100101_B)

POR / Soft Reset Value: 0000 0000 _B ;	Restart Value: xxxx xxxx _B
--	---------------------------------------

7	6	5	4	3	2	1	0	
ID12_5								
rw								

Field	Bits	Туре	Description
ID12_5	7:0	rw	WUF Identifier Bits 125

SWK_ID0_CTRL

SWK WUF Identifier bits 4...0 (Address 010 0110_B)

POR / Soft Reset Value: 0000 0000 _B ;	Restart Value: 0xxx xxxx _B
--	---------------------------------------

7	6	5	4	3	2	1	0
Reserved		T	ID4_0		1	RTR	IDE
r	I		rw			rw	rw

Field	Bits	Туре	Description				
Reserved	7	r	Reserved, always reads as 0				
ID4_0	6:2	rw	WUF Identifier Bits 40				
RTR	1	rw	Remote Transmission Request Field (acc. ISO 11898-1)0, Normal Data Frame1, Remote Transmission Request				
IDE	0	rw	Identifier Extension Bit0B, Standard Identifier Length (11 bit)1B, Extended Identifier Length (29 bit)				

Note: The setting RTR = 1 is not allowed for wake-up frames according to the ISO11898-2

SWK_MASK_ID3_CTRL SWK WUF Identifier Mask bits 28...21 (Address 010 0111_B) POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0	
MASK_ID28_21								
<u> </u>								

Field	Bits	Туре	Description
MASK_ID28_	7:0	rw	WUF Identifier Mask Bits 2821
21			0 _B , Unmasked - bit is ignored
			1 _B , Masked - bit is compared in CAN frame

Masking WUF bits is done by setting the respective MASK bit to '1' Note:

SWK_MASK_ID2_CTRL

SWK WUF Identifier Mask bits 20...13 (Address 010 1000_B)

POR / Soft Reset Value: 0000 0000 _B ;	Restart Value: xxxx xxxx _B
--	---------------------------------------

7	6	5	4	3	2	1	0		
MASK_ID20_13									
rw									

Field	Bits	Туре	Description
MASK_ID20_	7:0	rw	WUF Identifier Mask Bits 2013
13			0 _Β , Unmasked - bit is ignored
			1_B , Masked - bit is compared in CAN frame

SWK_MASK_ID1_CTRL

SWK WUF Identifier Mask bits 12...5 (Address 010 1001_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0	
MASK_ID12_5								
rw.								

rw

Field	Bits	Туре	Description
MASK_ID12_	7:0	rw	WUF Identifier Mask Bits 125
5			0 _B , Unmasked - bit is ignored
			1_B , Masked - bit is compared in CAN frame



Restart Value: 0xxx xx00_B

7	6	5	4	3	2	1	0
Reserved	MASK_ID4_0				Rese	rved	
r		I	rw		-	r	•

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
MASK_ ID4_0	6:2	rw	 WUF Identifier MASK Bits 40 0_B , Unmasked - bit is ignored 1_B , Masked - bit is compared in CAN frame
Reserved	1:0	r	Reserved, always reads as 0

SWK_DLC_CTRL

SWK Frame Data Length Code Control (Address $010\ 1011_B$) POR / Soft Reset Value: $0000\ 0000_B$; Restart Value: $0000\ xxxx_B$

7	6	5	4	3	2	1	0
	Rese	erved	I	DLC			
/ / / / /				rv	V		

Field	Bits	Туре	Description
Reserved	7:4	r	Reserved, always reads as 0
DLC	3:0	rw	Payload length in number of bytes
			$0000_{\rm B}$, Frame Data Length = 0 or cleared
			0001_{B} , Frame Data Length = 1
			0010_{B} , Frame Data Length = 2
			0011_{B} , Frame Data Length = 3
			0100_{B} , Frame Data Length = 4
			0101_{B} , Frame Data Length = 5
			$0110_{\rm B}$, Frame Data Length = 6
			0111_{B} , Frame Data Length = 7
			from $1000_{\rm B}$ to $1111_{\rm B}$ Frame Data Length = 8

Note: The number of transmitted bytes in the data field has to be indicated by the DLC. The DLC value consists of four bits. The admissible number of data bytes for a data frame is in a range from zero to eight. DLCs in the range of zero to seven indicate data fields of length of zero to seven bytes. DLCs in the range from eight to fifteen indicate data fields with a length of eight bytes. The configured DLC value has to match bit by bit with the DLC in the received wake-up frame (refer also to Chapter 5.6.2.3).

SWK_DATA7_CTRL SWK Data7 Register (Address 010 1100_B)

POR / Soft Reset Value: 0000 0000 _B ;			Restart Value: xxxx xxxx _B				
7	6	5	4	3	2	1	0
DATA7							
rw							

Field	Bits	Туре	Description
DATA7	7:0	rw	Data7 byte content(bit0=LSB; bit7=MSB)

SWK_DATA6_CTRL SWK Data6 Register (Address 010 1101_B)

POR / Soft Reset Value: $0000 0000_{B}$; Restart Value: xxxx xxx_B

			2		2				
	7	6	5	4	3	2	1	0	
I	DATA6								
		1	İ	I	1	ļ	1	I	
	rw								

Field	Bits	Туре	Description
DATA6	7:0	rw	Data6 byte content (bit0=LSB; bit7=MSB)

SWK_DATA5_CTRL SWK Data5 Register (Address 010 1110_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0	
DATA5								
	1 1	1	r	W	1 1		1	

Field	Bits	Туре	Description
DATA5	7:0	rw	Data5 byte content (bit0=LSB; bit7=MSB)

SWK_DATA4_CTRL

SWK Data4 Register (Address 010 1111_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0	
DATA4								
<u> </u>		<u> </u>	r	V				

Field	Bits	Туре	Description
DATA4	7:0	rw	Data4 byte content (bit0=LSB; bit7=MSB)

SWK_DATA3_CTRL SWK Data3 Register (Address 011 0000_B)

POR / Soft Reset Value: 0000 0000 _B ;			Restart Value: xxxx xxxx _B				
7	6	5	4	3	2	1	0
DATA3							
rw							

Field	Bits	Туре	Description
DATA3	7:0	rw	Data3 byte content (bit0=LSB; bit7=MSB)

SWK_DATA2_CTRL

SWK Data2 Register (Address $011\,0001_B$)

POR / Soft Reset Value: 0000 0000 _B ;	Restart Value: xxxx xxxx _B
--	---------------------------------------

7	6	5	4	3	2	1	0
DATA2							
rw							

Field	Bits	Туре	Description	
DATA2	7:0	rw	Data2 byte content (bit0=LSB; bit7=MSB)	

SWK_DATA1_CTRL

SWK Data1 Register (Address 011 0010_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0
DATA1							
rw							

Field	Bits	Туре	Description	
DATA1	7:0	rw	Data1 byte content (bit0=LSB; bit7=MSB)	

SWK_DATA0_CTRL

SWK Data0 Register (Address 011 0011_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0
DATAO							
rw							

Field	Bits	Туре	Description	
DATA0	7:0	rw	Data0 byte content (bit0=LSB; bit7=MSB)	



$\label{eq:swk_can_fd_can_fd_can_base} \begin{array}{l} \text{SWK}_{can_fd_can_base} \\ \text{CAN FD Configuration Control Register (Address 011 0100_{B})} \\ \text{POR / Soft Reset Value: 0000 0000_{B};} \\ \begin{array}{l} \text{Restart Value: 00xx xxxx}_{B} \end{array}$

7	6	5	4	3	2	1	0
Rese	rved	DIS_ERR_CNT	RX_FILT_BYP		FD_FILTER		CAN_FD_EN
	r	rwh	rw		rw		rw

Field	Bits	Туре	Description
Reserved	7:6	r	Reserved, always reads as 0
DIS_ERR_ CNT	5	rwh	Error Counter Disable Function 0 _B , Error Counter is enabled during SWK 1 _B , Error counter is disabled during SWK only if CAN_FD_EN = '1'
RX_FILT_ Byp	4	rw	RX Receiver Filter Bypass0B, RX Filter not bypassed1B, RX Filter bypassed
FD_FILTER	3:1	rw	CAN FD Dominant Filter Time 000_B , 50 ns 001_B , 100 ns 010_B , 150 ns 011_B , 200 ns 100_B , 250 ns 101_B , 300 ns 110_B , 350 ns 111_B , 700 ns
CAN_FD_ EN	0	rw	Enable CAN FD Tolerant Mode0, CAN FD Tolerant Mode disabled1, CAN FD Tolerant Mode enabled

Note: The bit *RX_FILT_BYP* is bypassing the analog filter in the CAN receiver path; The *FD_FILTER* is not in the analog path of the CAN receiver and is not bypassed.

Note: DIS_ERR_CNT is cleared by the SBC at tsilence expiration.

Note: The Normal-Mode CAN receiver (RX_WK_ SEL = '1') has to selected with a CAN FD tolerant operation for baud rates > 1MBit/s



SWK_OSC_TRIM_CTRL SWK Oscillator Trimming Register (Address 011 1000_B) POR / Soft Reset Value: xxxx xxxx_B; Restart Value: xxxx xxxx_B;

7	6	5	4	3	2	1	0
Reserved		Τ	Τ	TRIM_OSC	Ι	I	
rw		1	1	rw	1	l	1

Field	Bits	Туре	Description
Reserved	7	rw	Reserved, reads preset value - do not modify
TRIM_OSC	6:0	rw	Oscillator trimming (bit0=LSB; bit6=MSB); (only writable if TRIM_EN = '11')

Note: Due to CDR functionality, it is not required to change these values.

SWK_OPT_CTRL

Selective Wake Options Register (Address 011 1001_B) POR / Soft Reset Value: 000x xxxx_B; Restart Value: x00x xxxx_B

7	6	5	4	3	2	1	0
RX_WK_SEL	Rese	rved		1	Reserved	1	
rw		r	L	1	rw	1	

Field	Bits	Туре	Description
RX_WK_	7	rw	SWK Receiver selection (only accessible if TRIM_EN = '11')
SEL			0 _B , Low-Power Receiver selected during SWK
			1_{B} , Standard Receiver selected during SWK
Reserved	6:5	r	Reserved, always reads as 0
Reserved	4:0	rw	Reserved, reads preset value - do not modify

Note: The bit RX_WK_SEL is used to select the respective receiver during Selective Wake operation. The lowest quiescent current during Frame Detect Mode is achieved with the default setting RX_WK_SEL = '0', i.e. the Low-Power Receiver is already selected.

$\label{eq:swk_osc_cal_H_STAT} SWK_OSC_CAL_H_STAT \\ SWK Oscillator Calibration High Register (Address 011 1010_B) \\ POR / Soft Reset Value: 0000 0000_B; \\ Restart Value: xxxx xxxx_B \\ Restart Value: xxxx xxx \\ Restart Value: xxxx xxx \\ Restart Value: xxxx xxx \\ Restart Value: xxx x xxx \\ Restart Value: xxx x xxx \\ Restart Value: xxx x xxx \\ Restart Value: xxx x x x \\ Restart Value: xxx x x x \\ Restart Value: xxx x x \\ Restart Value: xxx x x \\ Restart Value: xxx x x \\ Restart Value: xxx x$

7	6	5	4	3	2	1	0
			OSC_(CAL_H	1		
	<u> </u>			r	I	<u> </u>	

Field	Bits	Туре	Description
OSC_CAL_	7:0	r	Oscillator Calibration High Register
н			

$\label{eq:swk_osc_cal_L_STAT} \begin{array}{l} \text{SWK} \mbox{Osc_llator Calibration Low Register (Address 011 1011_B)} \\ \text{POR / Soft Reset Value: 0000 0000_B;} \\ \end{array} \\ \begin{array}{l} \text{Restart Value: xxxx xxxx_B} \end{array}$

7	6	5	4	3	2	1	0	
	OSC_CAL_L							
	I	I	I	r	1	I		

Field	Bits	Туре	Description
OSC_CAL_L	7:0	r	Oscillator Calibration Low Register

SWK_CDR_CTRL1 CDR Control 1 Register (Address 011 1100_B)

POR / Soft Reset Value: 0000 0100_B; Restart Value: 0000 xx0x_B

7	6	5	4	3	2	1	0
	Rese	rved	I	SEL_	FILT	Reserved	CDR_EN
L	·	ſ	<u> </u>	r	N	r	rw

Field	Bits	Туре	Description
Reserved	7:4	r	Reserved, always reads as 0
SEL_FILT	3:2	rw	Select Time Constant of Filter 00_B , Time constant 8 01_B , Time constant 16 (default) 10_B , Time constant 32 11_B , adapt distance between falling edges 2, 3 bit: Time constant 32 distance between f. edges 4, 5, 6, 7, 8 bit: Time constant 16 distance between falling edges 9, 10 bit: Time constant 8
Reserved	1	r	Reserved, always reads as 0
CDR_EN	0	rw	Enable CDR 0 _B , CDR disabled 1 _B , CDR enabled



Restart Value: 0000 00xx_B

7	6	5	4	3	2	1	0
	Reserved						SC_CLK
	/ / / /						N

		Description
Reserved 7:2	r	Reserved, always reads as 0
SEL_OSC_CL 1:0 K	rw	Input Frequency for CDR module See Table 35 and Table 36.

Table 35 Frequency Settings of Internal Clock for the CDR

SEL_OSC_CLK[1:0]	int. Clock for CDR
00	80 MHz
01	40 MHz
10	20 MHz
11	10 MHz

Table 36 Recommended CDR Settings for Different Baud Rates

SEL_OSC_CLK [1:0]	Baudrate	SWK_BTL0_CTRL Value	SWK_CDR_LIMIT_HIGH_ CTRL Value	SWK_CDR_LIMIT_LOW_ CTRL Value		
00	500k	1010 0000	1010 1000	1001 1000		
01	500k	0101 0000	0101 0100	0100 1100		
10	500k	CDR Setting not recomm	CDR Setting not recommended for this baudrate due to insufficient precisi			
11	500k	CDR Setting not recommended for this baudrate due to insufficient precisi				
00	250k	CDR Setting not to be used due to excessive time quanta (counter overflow)				
01	250k	1010 0000	1010 1000	1001 1000		
10	250k	0101 0000	0101 0100	0100 1100		
11	250k	CDR Setting not recomm	ended for this baudrate du	e to insufficient precision		
00	125k	CDR Setting not to be use	ed due to excessive time qu	anta (counter overflow)		
01	125k	CDR Setting not to be use	CDR Setting not to be used due to excessive time quanta (counter overflow)			
10	125k	1010 0000	1010 1000	1001 1000		
11	125k	0101 0000	0101 0100	0100 1100		

SWK_CDR_LIMIT_HIGH_CTRL SWK CDR Upper Limit Control (Address 011 1110_B) POR / Soft Reset Value: 1010 1000_B; Restart Value: xxxx xxxx_B

,		в,		er root root B			
7	6	5	4	3	2	1	0
	CDR_LIM_H						
<u>.</u>	rw						

Field	Bits	Туре	Description
CDR_LIM_H	7:0	rw	Upper Bit Time Detection Range of Clock and Data Recovery
			SWK_BTL0_CTRL values > + 5% is clamped

$\label{eq:swk_CDR_LIMIT_LOW_CTRL} $$ SWK_CDR Lower Limit Control (Address 011 1111_B) $$ POR / Soft Reset Value: 1001 1000_B; $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx xxxx_B $$ Restart Value: xxxx xxxx_B $$ Restart Value: xxxx xxxx xxxx_B $$ Restart Value: xxxx xxxx xxxx $$ Restart Value: xxxx xxxx $$ Restart Value: xxxx xxxx $$ Restart Value: xxxx xxxx $$ Restart Value: xxxx xxxx $$ Restart Value: xxxx xxxx $$ Restart Value: xxxx xxx $$ Restart Value: xxx xxx $$ Restart Value: xxxx xx $$ Restart Value: xxx xx $$ Restart Value: xxx xx $$ Restart Value: xxx x $$ Restart Value: xxx xx $$ Restart Value: xxx x $$ Restart Value: xxx $$ Restart Value: xxx x $$ Restart Value: xxx $$ Restart Y $$ Restart Y $$ Restart Y $$ Restart Y $$ Restart Y $$ Restart Y $$ Restart Y $$ Restart Y $$ R$

7	6	5	4	3	2	1	0
CDR_LIM_L							
rw							

Field	Bits	Туре	Description
CDR_LIM_L	7:0	rw	Lower Bit Time Detection Range of Clock and Data Recovery
			SWK_BTL0_CTRL values < - 5% is clamped



13.6 SPI Status Information Registers

READ/CLEAR Operation (see also Chapter 13.3):

- One 16-bit SPI command consist of two bytes:
 - the 7-bit address and one additional bit for the register access mode and
 - following the data byte

The numbering of following bit definitions refers to the data byte and correspond to the bits D0...D7 and to the SPI bits 8...15 (see also figure).

- There are two different bit types:
 'r' = READ: read only bits (or reserved bits)
 'rc' = READ/CLEAR: readable and clearable bits
- Reading a register is done byte wise by setting the SPI bit 7 to "0" (= Read Only)
- Clearing a register is done byte wise by setting the SPI bit 7 to "1"
- SPI status registers are in general not cleared or changed automatically (an exception are the WD_FAIL bits). This must be done by the microcontroller via SPI command

The registers are addressed wordwise.

Register Short Name	Register Long Name	Offset Address	Reset Value
General Status Regist	ers		
SUP_STAT_1	Supply Voltage Fail Status	100 0000 _B	Page 151
SUP_STAT_0	Supply Voltage Fail Status	100 0001 _B	Page 152
THERM_STAT	Thermal Protection Status	100 0010 _B	Page 153
DEV_STAT	Device Information Status	100 0011 _B	Page 153
BUS_STAT	Bus Communication Status	100 0100 _B	Page 154
WK_STAT_0	Wake-up Source and Information Status 0	100 0110 _B	Page 155
WK_STAT_1	Wake-up Source and Information Status 1	100 0111 _B	Page 156
WK_LVL_STAT	WK Input Level	100 1000 _B	Page 156
GPIO_OC_STAT	GPIO Overcurrent Status	101 0100 _B	Page 157
GPIO_OL_STAT	GPIO Open-Load Status	101 0101 _B	Page 157
Selective Wake Status	s Registers		
SWK_STAT	Selective Wake Status	111 0000 _B	Page 158
SWK_ECNT_STAT	SWK Status	111 0001 _B	Page 158
SWK_CDR_STAT1	CDR Status 1 Register	111 0010 _B	Page 159
SWK_CDR_STAT2	CDR Status 2 Register	111 0011 _B	Page 159
Family and Product Ir	nformation Register		
FAM_PROD_STAT	Family and Product Identification Register	111 1110 _B	Page 160
	+	+	+

Table 37	Register Overview: SPI Status Information Registers
----------	---



13.6.1 General Status Registers

SUP_STAT_1

Supply Voltage Fail Status (Address 100 0000_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: 0xx0 00xx_B

_	7	6	5	4	3	2	1	0
	Reserved	vs_uv	vs_ov		Reserved	1	VCC1_OV	VCC1_WARN
1	r	rc	rc		r	•	rc	rc

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
VS_UV	6	rc	 VS Undervoltage Detection (V_{S,UV}) 0_B , No VS undervoltage detected 1_B , VS undervoltage detected (detection is only active when VCC1 is enabled - see also note below)
VS_OV	5	rc	VS Overvoltage Detection (V _{S,UV}) 0 _B , No VS overvoltage detected 1 _B , VS overvoltage detected (detection is only active when VCC1 is enabled - see also note below)
Reserved	4:2	r	Reserved, always reads as 0
VCC1_ OV	1	rc	VCC1 Overvoltage Detection (V _{CC1,0V,r})0, No VCC1 overvoltage warning1, VCC1 overvoltage detected
VCC1_ WARN	0	rc	VCC1 Undervoltage Prewarning (V _{PW,f})00, No VCC1 undervoltage prewarning1, VCC1 undervoltage prewarning detected

Notes

- 1. The VCC1 undervoltage prewarning threshold $V_{PW,f}/V_{PW,r}$ is a fixed threshold and independent of the VCC1 undervoltage reset thresholds.
- 2. VS under voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements. Exception: VS under voltage detection is also available in SBC Stop Mode if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold (VCC1_WARN is set)
- 3. VS over voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements. Exception: VS over voltage detection is always available when the charge pump is enabled (CP_EN = '1') and also in SBC Stop Mode if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold (VCC1_WARN is set)



Supply Voltage Fail Status (Address 100 0001_B) POR / Soft Reset Value: y000 0000_B;

Restart Value: x00x xx0x_B

	7	6	5	4	3	2	1	0
	POR	Reserved		VCC2_OT	VCC2_UV	VCC1_SC	Reserved	VCC1_UV
-	rc	r		rc	rc	rc	r	rc

Field	Bits	Туре	Description
POR	7	rc	Power-On Reset Detection 0 _B , No POR 1 _B , POR occurred
Reserved	6:5	r	Reserved, always reads as 0
VCC2_OT	4	rc	VCC2 Over Temperature Detection0B, No over temperature1B, VCC2 over temperature detected
VCC2_UV	3	rc	VCC2 Under Voltage Detection (V0B, No VCC2 Under voltage110VCC2 under voltage detected
VCC1_SC	2	rc	VCC1 Short to GND Detection (<vrtx for="" t="">2ms after switch On) 0 0 , No short . 1 , VCC1 short to GND detected</vrtx>
Reserved	1	r	Reserved, always reads as 0
VCC1_UV	0	rc	VCC1 UV-Detection (due to Vrtx reset)0B, No VCC1_UV detection1B, VCC1 UV-Fail detected

Notes

- 1. The MSB of the POR/Soft Reset value is marked as 'y': the default value of the POR bit is set after Power-on reset (POR value = 1000 0000). However it is cleared after a SBC Soft Reset command (Soft Reset value = 0000 0000).
- 2. During Sleep Mode, the bits VCC1_SC, VCC1_OV and VCC1_UV will not be set when VCC1 is Off
- 3. The VCC1_UV bit is never updated in SBC Restart Mode, in SBC Init Mode it is only updated after RSTN was released, it is always updated in SBC Normal and Stop Mode, and it is always updated in any SBC modes in a VCC1_SC condition (after VCC1_UV = 1 for >2ms).



THERM_STAT

Thermal Protection Status (Address 100	0010 _B)
POR / Soft Reset Value: 0000 0000 _B ;	Restar

Restart Value: 0000 xxxx_B

7	6	5	4	3	2	1	0
	Rese	erved	1	TSD2_SAFE	TSD2	TSD1	TPW
<u>.</u>		r	1	rc	rc	rc	rc

Field	Bits	Туре	Description					
Reserved	7:4	r	Reserved, always reads as 0					
TSD2_SAFE	3	rc	TSD2 Thermal Shut-Down Safe State Detection0B, No TSD2 safe state detected1B, TSD2 safe state detected: >16 consecutive TSD2 events occurred, next TSD2 waiting time is 60s					
TSD2	2	rc	TSD2 Thermal Shut-Down Detection0B, No TSD2 event1B, TSD2 OT detected - leading to SBC Fail-Safe Mode					
TSD1	1	rc	TSD1 Thermal Shut-Down Detection0, No TSD1 fail1, TSD1 OT detected (affected module is disabled)					
TPW	0	rc	$\begin{array}{l} \textbf{Thermal Pre Warning} \\ \textbf{0}_{B} & , \text{No Thermal Pre warning} \\ \textbf{1}_{B} & , \text{Thermal Pre warning detected} \end{array}$					

Note: Temperature warning and shutdown bits are not reset automatically, even if the temperature pre warning or the TSD condition is not present anymore.

DEV_STAT

7	6	5	4	3	2	1	0
DEV	DEV_STAT		Reserved		WD_FAIL		FAILURE
rc		r		rh		rc	rc

Field	Bits	Туре	Description
DEV_STAT	7:6	rc	Device Status before Restart Mode 00_B , Cleared (Register must be actively cleared) 01_B , Restart due to failure (WD fail, TSD2, VCC1_UV, trial to access SLEEP MODE without any wake source activated); also after a wake-up from Fail-Safe Mode 10_B , Sleep Mode 11_B , Reserved
Reserved	5:4	r	Reserved, always reads as 0



Field	Bits	Туре	Description
WD_FAIL	3:2	rh	Number of WD-Failure Events (1/2 WD failures depending on CFG1) 00_B , No WD Fail 01_B , 1x WD Fail, FO activation - Config 2 selected 10_B , 2x WD Fail, FO activation - Config 1 / 3 / 4 selected 11_B , Reserved (never reached)
SPI_FAIL	1	rc	SPI Fail Information0B, No SPI fail1B, Invalid SPI command detected
FAILURE	0	rc	Activation of Fail Output FO0B, No Failure1B, Failure occurred

Notes

- 1. The bits DEV_STAT show the status of the device before exiting SBC Restart Mode. Either the device came from regular SBC Sleep Mode or a failure (SBC Restart or SBC Fail-Safe Mode) occurred. See also "Invalid SPI Commands" in Chapter 13.2. Coming from SBC Sleep Mode will also be shown if there was a trial to enter SBC Sleep Mode without having cleared all wake flags before.
- 2. The WD_FAIL bits are implemented as a counter and are the only status bits, which are cleared automatically by the SBC. See also Chapter 11.1.1.
- 3. The SPI_FAIL bit can only be cleared via SPI command
- 4. In case of Config 2/4 the WD_Fail counter is frozen in case of WD trigger failure until a successful WD trigger.

BUS_STAT

Bus Communication Status (Address 100 0100_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: 000x xxxx_B

7	6	5	4	3	2	1	0
Reserved	Reserved		CANTO	SYSERR	CAN_FAIL		VCAN_UV
r	•	r	rc	rc	rc		rc

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
Reserved	6:5	r	Reserved, always reads as 0
CANTO	4	rc	CAN Time Out Detection 0 _B , Normal operation 1 _B , CAN Time Out detected
SYSERR	3	rc	SWK System Error 0 _B , Selective Wake Mode is possible 1 _B , System Error detected, SWK enabling not possible
CAN_FAIL	AN_FAIL 2:1 rc CAN F 00 _B 01 _B 10 _B		CAN Failure Status 00 _B , No error 01 _B , CAN TSD shutdown 10 _B , CAN_TXD_DOM: TXD dominant time out detected (P_9.3.39) 11 _B , CAN_BUS_DOM: BUS dominant time out detected (P_9.3.40)



Field	Bits	Туре	Description
		rc	Under voltage CAN Bus Supply
			0 _B , Normal operation 1 _B , CAN Supply under voltage detected. Transmitter disabled

Notes

- 1. CAN Recovery Conditions:
 - 1.) TXD Time Out: TXD goes High or transmitter is set to Wake Capable or switched Off;
 - 2.). Bus dominant time out: Bus will become recessive or transceiver is set to Wake Capable or switched Off.

3.) Supply under voltage: as soon as the threshold is crossed again, i.e. VCAN > VCAN_UV for CAN
4.)In all cases (also for TSD shutdown): to enable the Bus transmission again, TXD needs to be High (recessive)

- for a certain time (transmitter enable time).
 2. The VCAN_UV comparator is enabled if the mode bit CAN_1 = '1', i.e. in CAN Normal or CAN Receive Only Mode.
- 3. CANTO is set only if CAN2 = 1 (=SWK Mode enabled). It is set as soon as CANSIL was set and will stay set even in CANSIL it is reset. An interrupt is issued in SBC Stop- and SBC Normal Mode as soon as CANTO is set and the interrupt is not masked out, i.e. CANTO_MASK must be set to '1'.
- 4. The SYSERR Flag is set in case of a configuration error and in case of an error counter overflow (n>32). It is only updated if SWK is enabled (CAN_2 = '1'). See also Chapter 5.6.3.6.
- 5. CANTO is set asynchronously to the INTN pulse. In order to prevent undesired clearing of CANTO and thus possibly missing this interrupt, the bit is prevented from clearing (i.e. cannot be cleared) until the next falling edge of INTN.

WK_STAT_0

Wake-up Source and Information Status 0 (Address 100 0110_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: 00xx x00x_B

7	6	5	4	3	2	1	0
Rese	rved	CAN_WU	TIMER_WU		Reserved		WK_WU
	r	rc	rc		r		rc

Field	Bits	Туре	Description
Reserved	7:6	r	Reserved, always reads as 0
CAN_WU	5	rc	Wake-up via CAN Bus 0 _B , No Wake-up 1 _B , Wake-up
TIMER_WU	4	rc	Wake-up via TimerX 0 _B , No Wake-up 1 _B , Wake-up
Reserved	3:1	r	Reserved, always reads as 0
WK_WU	0	rc	Wake-up via WK 0 _B , No Wake-up 1 _B , Wake-up

Note: The respective wake source bit will also be set when the device is woken from SBC Fail-Safe Mode



WK_STAT_1

Wake-up Source and Information Status 1 (Address 100 0111_B)POR / Soft Reset Value: 0000 0000_B;Restart Value: 0x00 0000_B

7	6	5	4	3	2	1	0
Reserved		1	GPIO_WK_WU	Reserved			
	r		rc			r	

Field	Bits	Туре	Description
Reserved	7:5	r	Reserved, always reads as 0
gpio_wk_w u	4	rc	Wake-up via GPIO if configured as WK 0 _B , No Wake-up 1 _B , Wake-up
Reserved	3:0	r	Reserved, always reads as 0

WK_LVL_STAT WK Input Level (Address 100 1000_B) POR / Soft Reset Value: xx0x 000x_B;

Restart Value: xx0x 000x_B

7	6	5	4	3	2	1	0
SBC_DEV_LVL	CFG0_STATE	Reserved	GPIO_LVL		Reserved		WK_LVL
r	r	r	r		r		r

Field	Bits	Туре	Description
SBC_DEV	7	r	Status of SBC Operating Mode at TEST Pin
_LVL			0 _B , User Mode activated
			1 _B , SBC Development Mode activated
CFG0_STATE	6	r	Device Configuration Status on pin INTN
			0 _B , No external pull-up resistor connected on INTN (Config 2/4)
			1_B , External pull-up resistor connected on INTN (Config 1/3)
Reserved	5	r	Reserved, always reads as 0
GPIO_LVL	4	r	Status of GPIO if configured as GPIO (WK, LS or HS function)
			0 _B , Low Level (=0)
			1 _B , High Level (=1)
Reserved	3:1	r	Reserved, always reads as 0
WK_LVL	0	r	Status of WK
			0 _B , Low Level (=0)
			1 _B , High Level (=1)

Note: WK_LVL_STAT is updated in SBC Normal and Stop Mode and also in SBC Init and Restart Mode. See below for exceptions. In Cyclic Sense or wake mode, the registers contain the sampled level, i.e. the registers are updated after every sampling.

Note: GPIO_LVL is updated in SBC Normal and Stop Mode and also in SBC Init and Restart Mode if configured as wake input, low-side switch or high-side switch without Cyclic Sense (in case of FO

TLE9461-3ES V33 Lite CAN SBC Family



Serial Peripheral Interface

configuration the status is flagged with the FAILURE bit). In case the respective feature is disabled then the WK_LVL_STAT bit will not be updated.

Note: In case the HV measurement function is enabled (*WK_MEAS=1*), then the bits *WK_LVL* and *GPIO_LVL* are not updated and reset.

7	6	5	4	3	2	1	0
Reserved	GPIO_OC			Reser	rved	1	
r	rc			r			

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
GPIO_OC	6	rc	$\begin{array}{l} \textbf{Overcurrent Detection on GPIO (if configured as LS or HS)} \\ \textbf{0}_{B} & , \text{No OC} \\ \textbf{1}_{B} & , \text{OC detected} \end{array}$
Reserved	5:0	r	Reserved, always reads as 0

Note: The same status bit is used for the low-side and high-side configuration. The bit always applies for the actual configuration. In case the switch is disabled or another configuration is used then a flagged bit will stay set until it is cleared by the microcontroller;

GPIO_OL_STAT

GPIO Open-Load Status (Address 101 010	01 _B)
POR / Soft Reset Value: 0000 0000 _B ;	Restart Value: 0x00 0000 _B

7	6	5	4	3	2	1	0
Reserved	GPIO_OL			Resei	rved	T	
r	rc	4		r			

Field	Bits	Туре	Description
Reserved	7	r	Reserved, always reads as 0
GPIO_OL	6	rc	Open-Load Detection on GPIO (if configured as HS) 0_B 0_B , No OL 1_B , OL detected
Reserved	5:0	r	Reserved, always reads as 0



13.6.2 Selective Wake Status Registers

SWK_STAT

Selective Wake Status (Address 111 0000_B)

POR / Soft Reset Value: 0000 0000_B; Restart Value: 0x00 xxxx_B

7	6	5	4	3	2	1	0
Reserved	SYNC	Rese	Reserved		SWK_SET	WUP	WUF
r	r	ŕ		r	r	r	r

Field	Bits	Туре	Description				
Reserved	7	r	Reserved, always reads as 0				
SYNC	6	r	Synchronisation (at least one CAN frame without fail must have been received)00B, SWK function not working or not synchronous to CAN bus1, Valid CAN frame received, SWK function is synchronous to CAN bus				
Reserved	5:4	r	Reserved, always reads as 0				
CANSIL	3	r	CAN Silent Time during SWK operation 0 _B , tsilence not exceeded 1 _B , set if tsilence is exceeded.				
SWK_SET	2	r	Selective Wake Activity0B, Selective Wake is not active1B, Selective Wake is activated				
WUP	1	r	Wake-up Pattern Detection00B, NO WUP1B, WUP detected				
WUF	0	r	SWK Wake-up Frame Detection (acc. ISO 11898-2:2016) 0_B , No WUF 1_B , WUF detected				

Note: SWK_SET is set to flag that the selective wake functionality is activated (SYSERR = 0, CFG_VAL = 1, CAN_2 = 1). The selective wake function is activated via a CAN mode change, except if CAN = '100'.

SWK_ECNT_STAT SWK Status (Address 111 0001_B) POR / Soft Reset Value: 0000 0000_B;

Restart Value: 00xx xxxx _B

7	6	5	4	3	2	1	0
Reserved				ECI	NT	I	I
	r			r		I	<u> </u>

Field	Bits	Туре	Description
Reserved	7:6	r	Reserved, always reads as 0



Field	Bits	Туре	Description
ECNT	5:0	r	SWK CAN Frame Error Counter
			00 0000 _B , No Frame Error
			01 1111 _B , 31 Frame Errors have been counted
			10 0000 _B , Error counter overflow - SWK function is disabled

Note: If a frame has been received that is valid according to ISO 11898-1 and the counter is not zero, then the counter shall be decremented. If the counter has reached a value of 32, the following actions shall be performed: Selective Wake function shall be disabled, SYSERR shall be set and CAN Wake Capable function shall be enabled, which leads to a wake-up with the next WUP.

SWK_CDR_STAT1 CDR Status 1 Register (Address 111 0010_B) POR / Soft Reset Value: 1010 0000_B; Restart Value: xxxx xxxx_B

7	6	5	4	3	2	1	0		
NAVG_SAT									
	r								

Field	Bits	Туре	Description
NAVG_SAT	7:0	r	Output Value from Filter Block
			N_AVG is representing the integer part of the number of selected
			input clock frequency per CAN bus bit.
			N_AVG[11:4] e.g.160.75

SWK_CDR_STAT2

CDR Status 2	Register (Addı	ress 111 0011	L _B)		
POR / Soft Re	set Value: 000	0 0000 _B ;	Restart Valu	e: xxxx xxxx _B	
7	6	5	4	3	2

NAVG_SAT	Reserved			
r	r			

Field	Bits	Туре	Description
NAVG_SAT	7:4	r	Output Value from Filter Block N_AVG is representing the fractional part of the number of selected input clock frequency per CAN bus bit. N_AVG[3:0] e.g.160.75
Reserved	3:0	r	Reserved, always reads as 0

1

0



13.6.3 Family and Product Information Register

FAM_PROD_STAT

Family and Product Identification Register (Address $111 \ 1110_B$)POR / Soft Reset Value: 0101 yyyy B;Restart Value: 0101 yyyy B;

7	6	5	4	3	2	1	0
FAM				PROD			
ļ	 r	•	ł	L			

Field	Bits	Туре	Description
FAM	7:4	r	SBC Family Identifier (bit4=LSB; bit7=MSB)
			0 0 01 _B , Driver SBC Family
			0 0 10 _B , DC/DC-SBC Family
			0 0 11 _B , Mid-Range SBC Family
			0 100 _B , Multi-CAN SBC Family
			0 101 _B , LITE SBC Family
			0 111 _B , Mid-Range+ SBC Family
			x x x x _B , reserved for future products
PROD	PROD 3:0 r	3:0 r	SBC Product Identifier (bit0=LSB; bit3=MSB)
		0 1 10 _B , TLE9461ES (VCC1 = 5V, no SWK) / TLE9461-3ES (VCC1 = 5V, SWK)	
			0 1 1 1 _B , TLE9461ESV33 (VCC1 = 3.3V, no SWK) / TLE9461-3ESV33 (VCC1 = 3.3V, SWK)
			1 1 1 0 _B , TLE9471ES (VCC1 = 5V, no SWK) /
			TLE9471-3ES(VCC1 = 5V, SWK)
			1 1 1 1 _B , TLE9471ESV33 (VCC1 = 3.3V, no SWK) /
			TLE9471-3ESV33 (VCC1 = 3.3V, SWK)

Notes

- 1. The actual default register value after POR, Soft Reset or Restart of PROD depends on the respective device. Therefore the value 'y' is specified.
- 2. SWK = Selective Wake feature in CAN Partial Networking standard



13.7 Electrical Characteristics

Table 38Electrical Characteristics

 $V_{\rm S}$ = 5.5 V to 28 V, $T_{\rm j}$ = -40°C to +150°C, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
SPI frequency							
Maximum SPI frequency	f _{SPI,max}	-	-	4.0	MHz	1)	P_16.7.1
SPI Interface; Logic Inputs SD		SN	1		L	·	
H-input Voltage Threshold	V _{IH}	_	-	0.7× V _{CC1}	V	-	P_16.7.2
L-input Voltage Threshold	V _{IL}	0.3 × V _{CC1}	-	-	V	-	P_16.7.3
Hysteresis of input Voltage	V _{IHY}	0.08 × V _{CC1}	0.12 × V _{CC1}	0.4 × V _{CC1}	V	1)	P_16.7.4
Pull-up Resistance at pin CSN	R _{ICSN}	25	40	55	kΩ	$V_{\rm CSN} = 0.7 \times V_{\rm CC1}$	P_16.7.5
Pull-down Resistance at pin SDI and CLK	R _{ICLK/SDI}	25	40	55	kΩ	$V_{\rm SDI/CLK} =$ 0.2 x $V_{\rm CC1}$	P_16.7.6
Input Capacitance at pin CSN, SDI or CLK	CI	-	10	-	pF	1)	P_16.7.7
Logic Output SDO	1						
H-output Voltage Level	V _{SDOH}	0.8 × V _{CC1}	-	-	V	I _{DOH} = -1.6 mA	P_16.7.8
L-output Voltage Level	V _{SDOL}	-	-	0.2 × V _{CC1}	V	I _{DOL} = 1.6 mA	P_16.7.9
Tristate Leakage Current	I _{SDOLK}	-10	-	10	μA	$V_{\rm CSN} = V_{\rm CC1};$ 0 V < $V_{\rm DO}$ < $V_{\rm CC1}$	P_16.7.10
Tristate Input Capacitance	C _{SDO}	_	10	15	pF	1)	P_16.7.11
Data Input Timing ¹⁾			- #		L.		
Clock Period	t _{pCLK}	250	-	-	ns	-	P_16.7.12
Clock High Time	t _{CLKH}	125	_	-	ns	-	P_16.7.13
Clock Low Time	t _{clkl}	125	_	-	ns	-	P_16.7.14
Clock Low before CSN Low	t _{bef}	125	-	-	ns	-	P_16.7.15
CSN Setup Time	t _{lead}	250	-	-	ns	-	P_16.7.16
CLK Setup Time	t _{lag}	250	-	-	ns	-	P_16.7.17
Clock Low after CSN High	t _{beh}	125	-	-	ns	-	P_16.7.18
SDI Set-up Time	t _{DISU}	100	_	_	ns	-	P_16.7.19
SDI Hold Time	t _{DIHO}	50	_	-	ns	-	P_16.7.20
Input Signal Rise Time at pin SDI, CLK and CSN	t _{rIN}	-	-	50	ns	-	P_16.7.21




Table 38Electrical Characteristics (cont'd)

 $V_{\rm S}$ = 5.5 V to 28 V, $T_{\rm j}$ = -40°C to +150°C, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Input Signal Fall Time at pin SDI, CLK and CSN	t _{fIN}	-	-	50	ns	-	P_16.7.22
Delay Time for Mode Changes	t _{Del,Mode}	_	-	6	μs	²⁾ includes internal oscillator tolerance	P_16.7.23
CSN High Time	t _{CSN(High)}	3	-	-	μs	-	P_16.7.24
Data Output Timing ¹⁾							
SDO Rise Time	t _{rSDO}	_	30	80	ns	<i>C</i> _L = 100 pF	P_16.7.25
SDO Fall Time	t _{fSDO}	_	30	80	ns	<i>C</i> _L = 100 pF	P_16.7.26
SDO Enable Time	t _{ensdo}	_	-	50	ns	low impedance	P_16.7.27
SDO Disable Time	t _{DISSDO}	-	-	50	ns	high impedance	P_16.7.28
SDO Valid Time	t _{VASDO}	-	-	50	ns	<i>C</i> _L = 100 pF	P_16.7.29

1) Not subject to production test; specified by design

2) Applies to all mode changes triggered via SPI commands

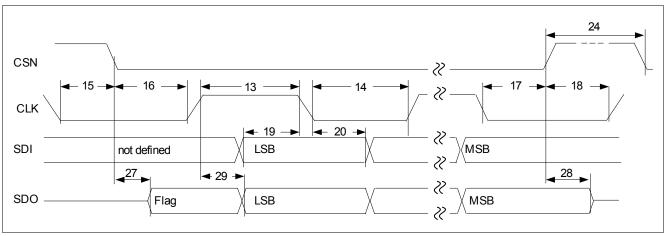



Note: Numbers in drawing correlate to the last 2 digits of the Number field in the Electrical Characteristics table.



14 Application Information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

14.1 Application Diagrams

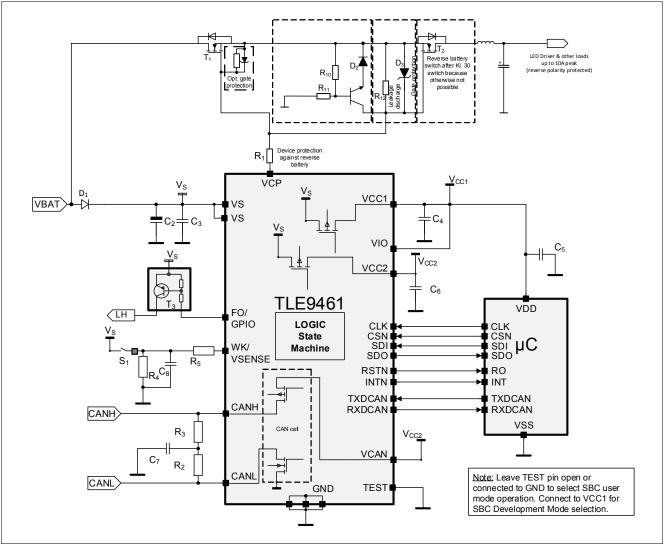


Figure 50 TLE9461-3ES V33 Application Diagram

Notes


- 1. This is a very simplified example of an application circuit. The function must be always verified in the real application.
- 2. Reverse polarity protection circuitry (D2, R10, R11) is mandatory for dynamic reverse polarity requirements, i.e. if load is not to be turned On. To further reduce the quiescent current, a diode can be placed optionally in series with GND and R11.

TLE9461-3ES V33 Lite CAN SBC Family



Application Information

Figure 51 shows the required circuitry for an off-board LED control using the GPIO pin with the high-side switch configuration.

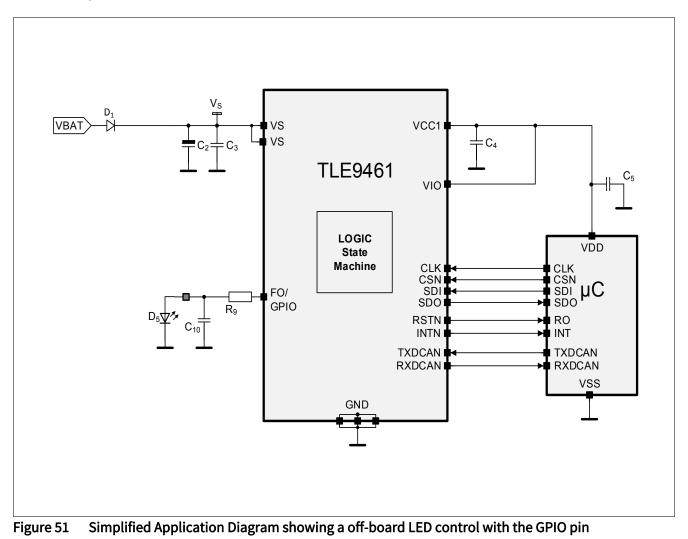

Note: This is a very simplified example of an application circuit. The off-board LED control function must be verified in the real application. The external circuitry is a minimum requirement and may vary depending on respective requirements. The same protection requirments apply for the configuration of FO/GPIO as low-side switch or wake input.

TLE9461-3ES V33 Lite CAN SBC Family



Application Information

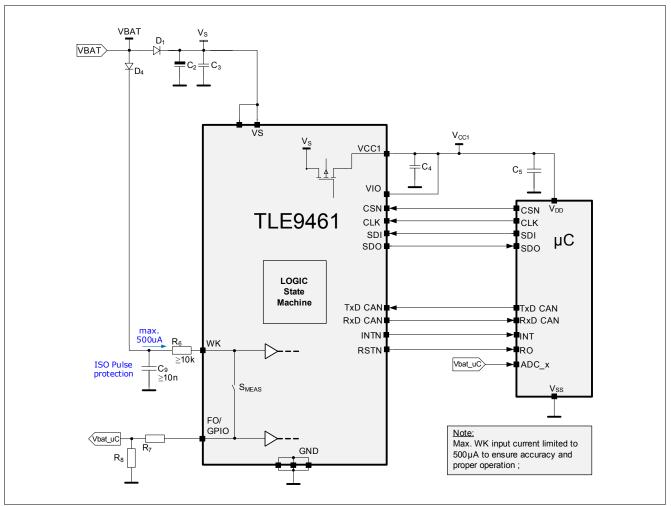


Figure 52 Simplified Application Diagram showing the Alternate High-Voltage Measurement Function via WK/SENSE and FO/GPIO

Note: This is a simplified example of an application circuit. The function must be verified in the real application. WK must be connected to signal to be measured and FO/GPIO is the output to the microcontroller supervision function. The maximum current into WK must be <500uA. The minimum current into WK should be >5uA to ensure proper operation.



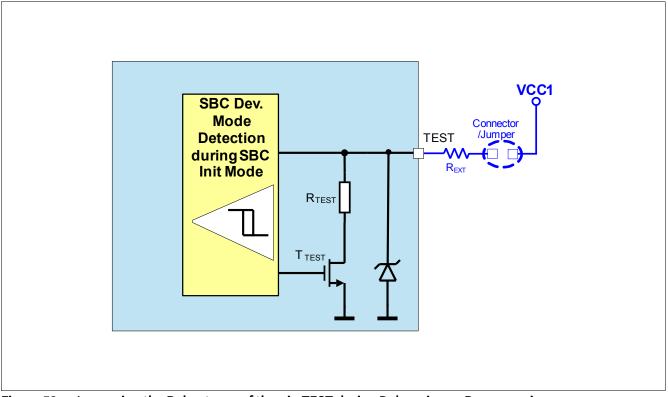


Figure 53 Increasing the Robustness of the pin TEST during Debugging or Programming

TLE9461-3ES V33 Lite CAN SBC Family

Application Information



Ref.	Typical Value	Purpose / Comment	
Capacita	inces		
C2	68µF	Buffering capacitor to cut off battery spikes, value depending on application requirements	
C3	100nF ceramic	EMC, blocking capacitor, ceramic X7R or equivalent, ESR < 50 m Ω	
C4	2.2μF low ESR	Blocking capacitor, min. 1µF for stability	
C5	100nF ceramic	Spike filtering, ceramic X7R or equivalent, ESR < 50 m Ω to improve stability of supply for microcontroller; not needed for SBC	
C6	2.2μF low ESR	Blocking capacitor, min. 470nF for stability; if used for CAN supply place a 100nF ceramic capacitor in addition v close to VCAN pin for optimum EMC behavior	
C7	4.7nF / OEM dependent	Split termination stability	
C8,9	10nF	Spike filtering, as required by application, mandatory protection for off-board connections, (see also Simplified Application Diagram with the Alternate Measurement Function)	
C10	22nF	As required by application and GPIO current capability (see also Chapter 11.1.2), mandatory protection for off-board connections	
Resistan	ces		
R1	1kΩ	Device protection against reverse battery	
R2	60Ω / OEM dependent	CAN bus termination	
R3	60Ω / OEM dependent	CAN bus termination	
R4	10kΩ	Wetting current of the switch, as required by application	
R5,6	10kΩ	WK pin current limitation, e.g. for ISO pulses (see also Simplified Application Diagram with the Alternate Measurement Function)	
R7, 8	depending on application and microcontroller	Voltage Divider resistor to adjust measurement voltage to microcontroller ADC input range (see also Simplified Application Diagram with the Alternate Measurement Function)	
R9	10Ω	As required by application, ESD protection, mandatory protection for off-board connections only	
R10, 11	47kΩ	Reverse battery protection	
R12	100kΩ	Leakage discharge resistor	
Active Co	omponents		
D1	e.g. BAS 3010A, Infineon	Reverse polarity protection for VS supply pins	
D2	e.g. BAS 21, Infineon	Reverse battery protection	
D3	12V Zener Diode	Gate protection	
D4	e.g. BAS 21, Infineon	Reverse battery protection for measurement circuitry	
D5	e.g. LED	circuit example: Illumination LED	
T1	e.g. IPB80N04S4-04	Terminal 30 (Kl. 30) Switch, N-MOSFET	
T2	e.g. IPB80N04S4-04	Reverse battery protection, N-MOSFET	

Table 39 Bill of Material for Simplified Application Diagram

TLE9461-3ES V33 Lite CAN SBC Family



Application Information

Table 39 Bill of Material for Simplified Application Diagram (cont'd)

Ref.	Typical Value	Purpose / Comment	
Т3	e.g. BCR191W	High active FO control	
uC	e.g. TC2xxx	Microcontroller	



14.2 ESD Tests

Tests for ESD robustness according to IEC61000-4-2 "GUN test" (150 pF, 330 Ω) have been performed. The results and test condition are available in a test report. The values for the tests are listed below.

Table 40ESD "GUN test"

Performed Test	Result	Unit	Remarks
ESD at pins CANH, CANL, VS, WK, VCC2 versus GND	> 6	kV	positive pulse
ESD at pins CANH, CANL, VS, WK, VCC2 versus GND	< -6	kV	negative pulse

1) ESD susceptibility "ESD GUN" according to EMC 1.3 Test specification, Section 4.3 (IEC 61000-4-2). Tested by external test house (IBEE Zwickau, EMC Test report Nr. 02-05-18).

2) ESD Test "Gun Test" is specified with external components for pins VS, WK, and VCC2. See the application diagram in **Chapter 14.1** for more information

EMC and ESD susceptibility tests according to SAE J2962-2 (V. 2014-01-23) have been performed. Tested by external test house (Jakob Mooser GmbH, Test report Nr. 145 / 2018)



14.3 Thermal Behavior of Package

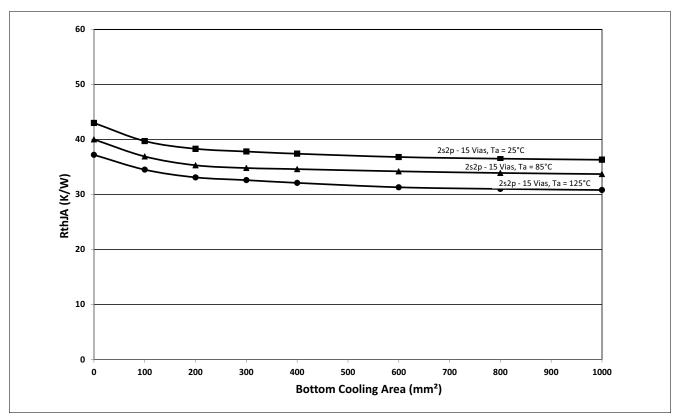


Figure 54 Thermal Resistance (R_{th_JA}) vs. Cooling Area



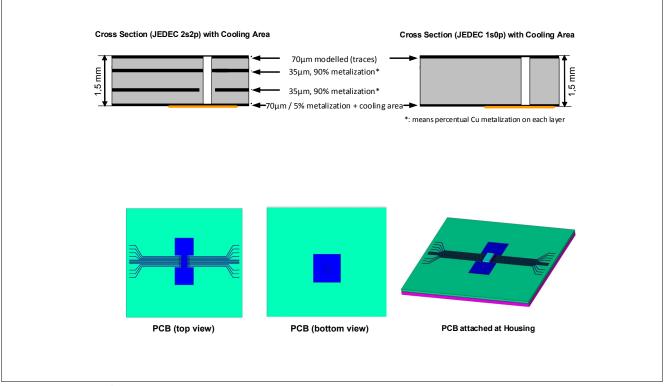


Figure 55 Board Setup

Board setup is defined according JESD 51-2, -5, -7.

Board: 75 x 75 x 1.5mm³ with 2 inner copper layers (35µm thick), with thermal via array under the exposed pad contacting the first inner copper layer and 300mm² cooling area on the bottom layer (70µm).

14.4 Further Application Information

- Please contact us for information regarding the pin FMEA
- For further information you may contact http://www.infineon.com/

infineon

Package Outlines

15 Package Outlines

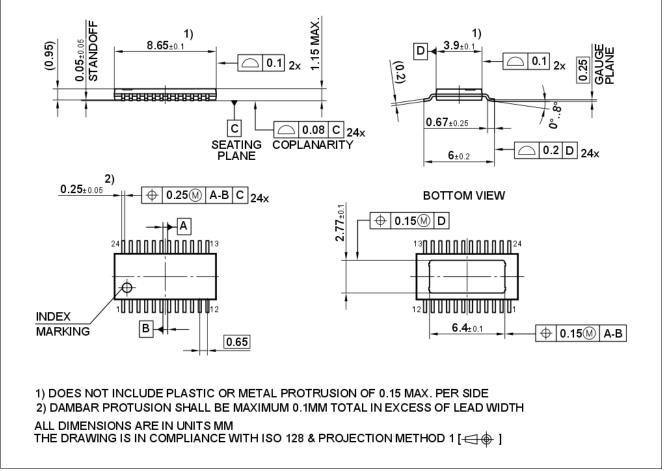


Figure 56 PG-TSDSO-24-1 Dimensions

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

Revision History



16 Revision History

Revision	Date	Changes
Rev. 1.00	2018-08-01	Initial Release

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2018-08-01 Published by Infineon Technologies AG 81726 Munich, Germany

© 2018 Infineon Technologies AG. All Rights Reserved.

Do you have a question about any aspect of this document? Email: erratum@infineon.com

Document reference Z8F53477368

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application. For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.