

TEROSON body fillers Good as new





Make everything as good as new

IF YOU'RE LOOKING FOR THE SMOOTHEST FIX, NOW THERE'S ONLY ONE – TEROSON. Having brought Plastic Padding technology into our portfolio, we're the brand with fixes for all. Our fillers have the power to turn back time. Forget any damage. With our products, anything can be made to look like new again, even where very thin skims are called for.

TEROSON UP 270 Flowable Polyester Filler, from our Professional range, has been specially designed to do just that. A handy pouch, easy to mix, apply and sand, this is just one of many products delivering what today's body shops require.


Same technology, new name

ALL THESE INNOVATIVE PRODUCTS, AND THE TECHNOLOGY BEHIND THEM, NOW BELONG TO TEROSON. The result is one brand that has products for automotive bodywork repair, DIY maintenance and marine repairs.

Already well respected amongst OEM and car repair markets, TEROSON will bring its reputation for excellence to these new markets.



History of automotive body filler

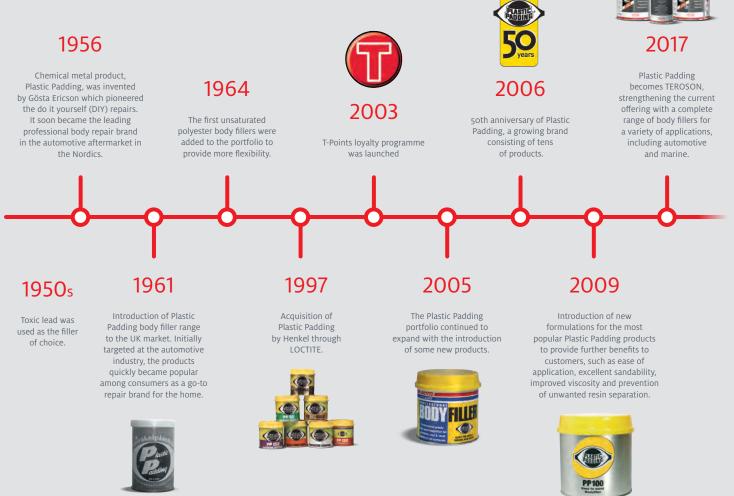

Professional Range of Polyester Fillers

Professional range of polyester fillers meets the needs of bodyshops requiring deep filling to a final layer skim before painting.



🚔 Application Area

Product Name	Bare Steel	Aluminium	Galvanised Surface	Glass Fibre	Paintable Plastic Parts
TEROSON UP 210	Х	X	X	X	
TEROSON UP 220	X	X	X	X	
TEROSON UP 230	х	X	X	X	
TEROSON UP 240		x	х		
TEROSON UP 250					x
TEROSON UP 260	Х	Х	X	X	
TEROSON UP 270	x	x	х	x	

TEROSON UP 210 Universal Filler



TEROSON UP 220 Soft Body Filler

L	0	1
	TEROSON	K

TEROSON UP 230 Light Weight



TEROSON UP 240 Alu Galva Filler



Features	Application	Replaces Plastic Padding
 Premium everyday body filler Pot life: 3 mins Colour: beige 	 Repairs dents, scratches, pinholes, reshaping and imperfections Excellent build quality and fine finish 	Ultima

Features	Application	Replaces Plastic Padding
 Soft body filler for easy filling and sanding Pot Life: 4 mins 	 Repairs dents, scratches, pinholes, reshaping and imperfections Easy spread and workability on large areas 	Plastic Padding 2000

Colour: light beige

• Sandable: 20 to 30 mins

• Sandable: 20 to 30 mins

Features	Application	Replaces Plastic Padding
 Easy to sand Pot life: 4:30 mins Colour: light green Sandable: 25 to 30 mins 	 Repairs minor dents, scratches, reshaping and imperfections Highly flexible, enabling the filler to be sanded down over long periods of time 	PP50 & PP100

Perfectly suitable for lightweight structures

Features	Application	Replaces Plastic Padding
 Hybrid filler for aluminium and galvanised surfaces Pot life: 4 mins Colour: white Sandable: 15 to 20 mins 	 Repairs minor dents, scratches, reshaping and imperfections on galvanised body work Especially designed for new aluminium panel structures (for new generation of aluminium body panels) 	PP Galva



TEROSON UP 250 Diactic Fillor

Plastic Filler			
	 Elastic filler for paintable plastic repairs Pot life: 3 mins Colour: dark grey Sandable: 25 to 30 mins 	 Repairs scratches, damage on plastic bumpers and trim Ideal to skim over plastic repair products Can be applied in very thin layers e.g. smart repair 	Plastic

TEROSON UP 260 Stopper



TEROSON UP 270

Flowable Filler



Features	Application
Super smooth, easy to spread body fillerPot life: 4:30 mins	 Self levelling filler to repair scratches and imperfections

• Colour: grey/green

Features

Features

• Ultra smooth finishing body filler

• Pot life: 4 mins

• Colour: light grey

• Sandable: 15 to 20 mins

- Sandable: 10 to 20 mins
- Excellent finish before painting • For big repair areas with thin

Application

Application

• Final coat on minor dents, scratches

• Super fine texture ensures a smooth

flawless surface and a perfect feather edge

and imperfections

layer application



Replaces Plastic Padding

Replaces Plastic Padding

Stopper

All Purpose Range of Polyester Fillers

Bonds numerous substrates on the car and around the home.



X Application Area

Product Name	Bare Steel	Aluminium	Galvanised Surface	Zinc Coated Steel	Glass Fibre	Copper	Tin	Emergency Repair
TEROSON UP 110	x	x	х		х			
TEROSON UP 120	х	x	х		х	х	x	х
TEROSON UP 130	х	x	х		х	х	x	x
TEROSON UP 140	x	x		х				
TEROSON UP 150	х	x	х		х			

TEROSON UP 110	TER	OSO	N U	P 1	10
-----------------------	-----	------------	-----	------------	----

Elastic Body Filler



TEROSON UP 120 Leak Fix



TEROSON UP 130

Chemical Metal



TEROSON UP 140 Metal Filler



TEROSON UP 150 Glass Fibre Filler



Features	Application	Replaces Plastic Padding
 Elastic filler Outstanding flexibility Good adhesion Eliminates cracking and flaking Pot life: 3 mins Colour: grey/green Sandable: 20 to 30 mins 	 Repairs dents, scratches, pinholes, reshaping and imperfections Use on steel, aluminium and galvanised surfaces, wood and glass fibre Perfectly suitable for vibrating and flexible surfaces 	Elastic Professional Bodyfiller
Features	Application	Replaces Plastic Padding
 All purpose emergency filler Resistant to oil, water and common chemicals Pot Life: 3:30 mins Colour: grey/green/black Sandable: 15 to 20 mins Temperature resistance up to 120°C Good temperature resistance 	• Emergency repair of fuel tanks, leaking pipes, radiators etc	Leak Fix
Features	Application	Replaces Plastic Padding
 Original hard multi purpose repair paste Resistant to water, oil, fuel, most weak acids and chemicals Pot life: 4:30 mins Colour: dark grey Sandable: 15 to 20 mins High chemcial resistance 	 Repairs dents, pinholes and scratches Can be drilled and tapped 	Chemical Metal
Features	Application	Replaces Plastic Padding
All rounder for metal surfaces	• Repairs dents, pinholes and scratches	TEROSON UP 340 MF

- Pot life: 3:30 mins
- Colour: beige
- Sandable: 15 to 20 mins
- Features Application Replaces Plastic Padding • Glass fibre filler for bridging holes • Repairs holes Glass Fibre • Pot life: 6:30 mins Creates fibre reinforced repair • Colour: blue/green • Water resistant • Sandable: 20 to 30 mins • High tensile glass fibre strands for
 - bridging and filling holes

Marine Filler and Gelcoat

Marine products suitable for structural repairs and minor damage above and below the water line.





Product Name	Glass Fibre	Wood
TEROSON UP 610	x	х
TEROSON UP 620	x	Х

TEROSON UP 610

Marine Filler



TEROSON UP 620 Gelcoat Filler

-	-	_		
APR -	TEI	2050	W.	K
	-	100		1
1	120		Lana Ar peak	1
	-0			ю

MARINE EPOXY*



Features	Application	Replaces Plastic Padding
 Universal Marine Filler Pot life: 4 mins Colour: white Sandable: 15 to 20 mins 	 Repairs of transom/stern damage, stress cracks, redundant holes, damage caused by osmosis or crazing Above the water line 	Marine Filler

Features	Application	Replaces Plastic Padding
 Restores original gelcoat finish Pot Life: 12 mins Colour: white Sandable: 20 to 30 mins 	 Restores orginal gelcoat finish when repairing osmosis blisters and minor surface damage Waterproof and can be over painted if required Above and below the water line Polishing possible for excellent and glossy finish 	Gelcoat

Features	Application	Replaces Plastic Padding
Two part epoxy adhesiveFast Setting and easy sandTough durable finish	 Sealing osmosis blisters Below the waterline repairs on wood, metal and glass fibre 	

*Plastic Padding Marine Epoxy will continue to be sold under the Plastic Padding brand.

Henkel Ltd Wood Lane End Hemel Hempstead Herts HP2 4RQ

www.carrepairsolutions.co.uk

The data contained herein are intended as reference only. Please contact Henkel Technical Support Group assistance and recommendation on specifications for these products.