

**MERCURY USE IN EUROPE**

On 13 February 2003, 2 directives of the European Parliament and of the Council appeared in the official Journal of the European Union :

Directive 2002/95/EC of January 27, 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)

And

Directive 2002/96/EC of January 27, 2003 on waste electrical and electronic equipment (WEEE)

Directive 2002/95/EC stipulates that, from 1 July 2006, new electrical and electronic equipment put on the European market may not contain lead, mercury, cadmium, hexavalent chromium and PBB (polybrominated diphenyls) or PBDE (polybrominated diphenyl ethers).

This applies only to the following categories of electrical and electronic equipment, which are mainly consumer products :

- Large household appliances
- Small household appliances
- IT and Telecommunication equipment
- Consumer equipment
- Lighting equipment
- Electrical and electronic tools
- Toys
- Automatic dispensers
- Electric light bulbs and luminaires in households

This directive does not apply to industrial or professional equipment :

- Medical equipment systems
- and
- Monitoring and control instruments

This directive also does not apply to spare parts for the repair, or to the reuse, of electrical and electronic equipment put on the European market before 1 July 2006.

This directive does not apply to the applications listed in the Annex of this directive.

This annex specifies applications of lead, mercury, cadmium and so on, which are exempted from the requirements, because their substitution is technically not feasible or their substitution creates a negative impact on people or the environment (decreased safety or other waste, environmental or technical problems).

The European member states have to bring in force the laws, regulations and administrative provisions necessary to comply with this directive before 13 August 2004.

**Conclusion**  
Mercury wetted relays, switches and sensors still may be used in professional systems, as in monitoring and control instruments and medical equipment systems, and be sold on the European market after 1 July 2006.

Also, mercury wetted relays, switches and sensors can always be used as spare parts for repair or reuse of every electric or electronic equipment.

The Comus Group of Companies will, together with the sector organisations, define and communicate the necessary arguments to defend the use of mercury contained products for these applications where there is no technical alternative without effecting the safety and the environment in any other negative way.

The Comus International group of companies consists of:



Comus International  
454 Allwood Road  
Clifton  
New Jersey 07012  
U.S.A

Tel: (1)973 - 777 - 6900  
Fax: (1)973 - 777 - 8405  
email: info@comus-intl.com  
Website: http://www.comus-intl.com



Assemtech Europe Limited  
Unit 7, Rice Bridge Industrial Estate  
Thorpe - Le - Soken  
Essex  
England  
CO16 0HL

Tel: +44 (0)1255 862236  
Fax: +44 (0)1255 862014  
email: sales@assemtech.co.uk  
Website: http://www.assemtech.co.uk



Comus Belgium BVBA  
Overhaamlaan 40  
B-3700 Tongeren  
Belgium

Tel: +32 (0)12 390400  
Fax: +32 (0)12 235754  
email: info@comus.be  
Website: http://www.comus.be



Comus International SARL  
Immeuble "Les Juillottes"  
31 Cours des Juillottes  
F-94700 Maisons-Alfort  
France

Tel: +33 (0)1 43 96 86 10  
Fax: +33 (0)1 43 96 86 11  
email: info@comus.fr  
Website: http://www.comus.fr



Switching Technologies Gunther  
B-9, B-10, & C-1 Special Economic Zone (MEPZ)  
Kadapperi  
Tambaram  
Chennai 600 045  
India

Tel: +91 44 22628093  
Fax: +91 44 22628271  
email: stg@stg-india.com



Comus Electronics and Technologies  
India Private Limited  
No 26, Crescent Park Street  
T Nagar  
Chennai 600 017  
India

Tel: +91 44 42127124  
Fax: +91 44 42127125  
email: syed@comus-intl.com  
venkataraman@comus-intl.com  
Website: http://www.comusindia.com

We also have a large network of worldwide agents. These can be seen on any of our websites, or on our company profile brochure.

# Mercury Switches



**DESCRIPTION**


The products included in this catalogue are all designed to detect motion or movement. Forms of movement are: Tilt, Rotation, Vibration, Shock or Acceleration. Many of these can also be supplied for surface mount applications.

**Tilt Switches**

These operate when tilted from the horizontal position. The switch movement required to cause contact change is called the differential angle. It is very important when designing a tilt switch to allow for the differential angle and understand that when in the horizontal position the switch contact may be open or closed.

**Tilt Switch Modules**

A Tilt Switch located inside a sealed (usually plastic) enclosure. Flying leads are provided for easy connection.




**Tip-Over Switches**

These operate when the switch is tilted from the vertical position. The angle through which the switch has to move before operating is called the operating angle. Many of these switches are omni-directional

**Tip-Over Switch Modules**

A Tip-Over Switch located inside a sealed (usually plastic) enclosure. Flying leads are provided for easy connection.

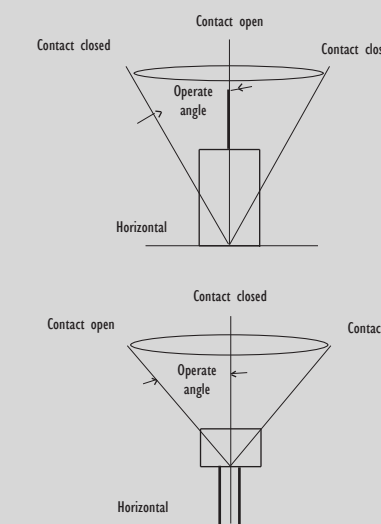

**Acceleration and Shock Sensors**

These switches have a normally open contact which closes when the switch reaches the acceleration activation level.

Direction of acceleration to close contacts




**Movement and Vibration Switches**

When correctly positioned the switch contacts will react by giving a fleeting change of state when subjected to movement or vibration.


**Movement and Vibration Switch Modules**

A Movement or Vibration switch located in a sealed (usually plastic) housing.

**Position Sensitive**





**Non Position Sensitive**



MERCURY SWITCHES

\*use either part number

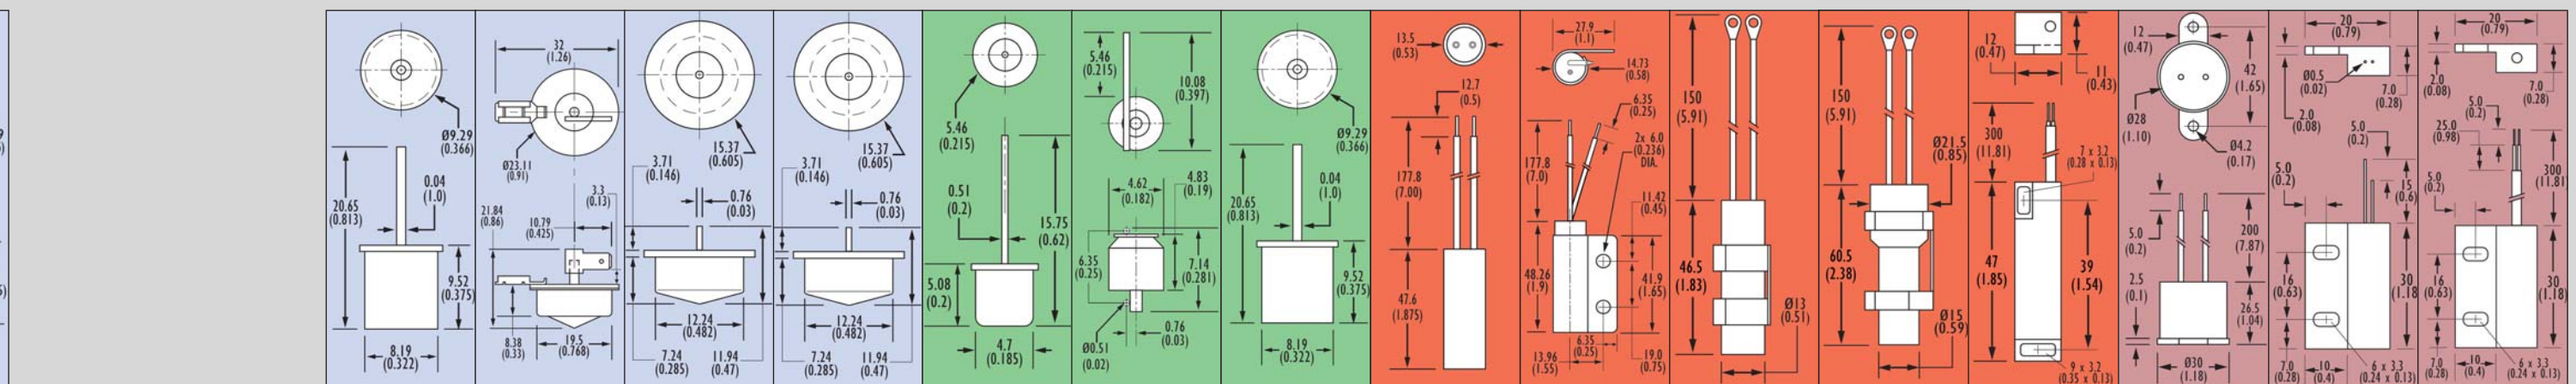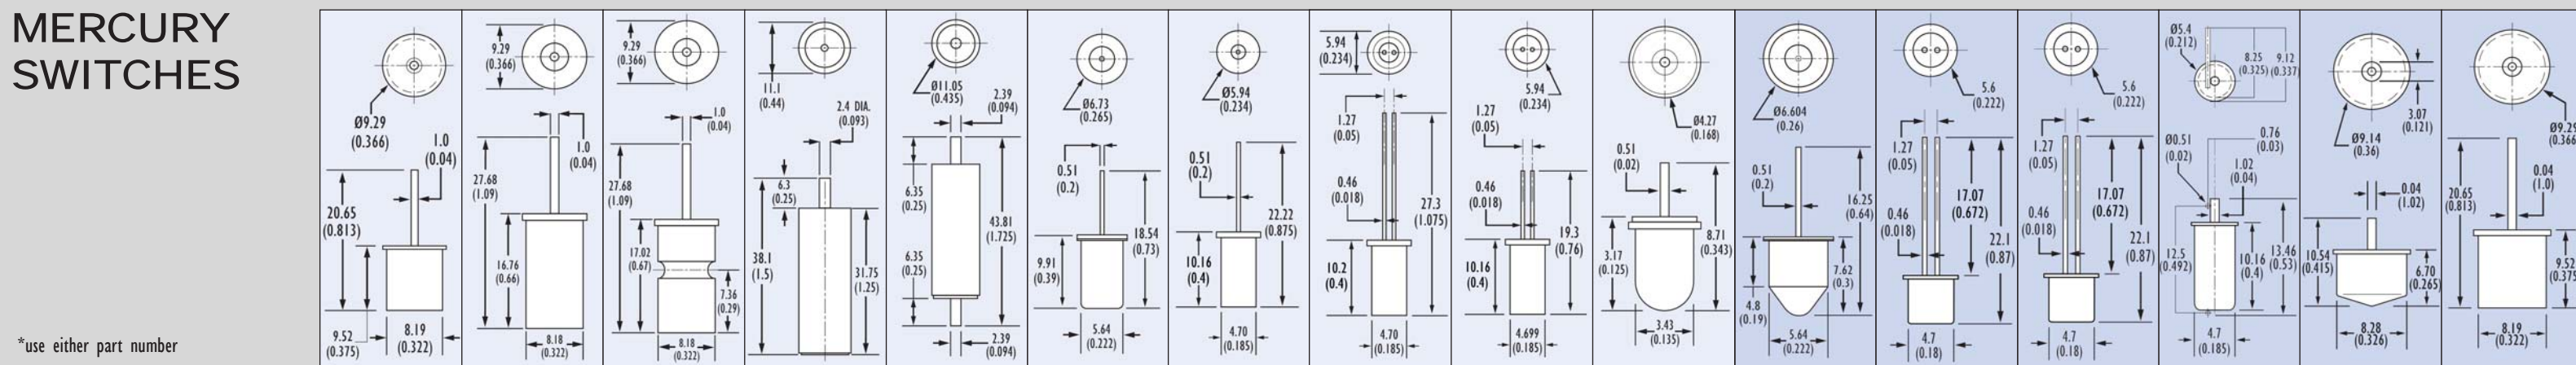

Options / Features	<ul style="list-style-type: none"> <li>• Compact 1 Amp switching</li> <li>• Wide Angle</li> <li>• 10 Amp Switching</li> <li>• SPDT Form C</li> <li>• General Purpose</li> <li>• General Purpose</li> <li>• General Purpose</li> <li>• General Purpose</li> <li>• Sub Miniature</li> <li>• Miniature</li> <li>• Miniature</li> <li>• Low Angle</li> <li>• Omni-Directional</li> <li>• CM1425-0 (1 Electrode)</li> <li>• CM1425-1 (2 Electrodes)</li> </ul>																Options / Features	<ul style="list-style-type: none"> <li>• General Purpose</li> <li>• U.I. Approved</li> <li>• Heavy Duty</li> <li>• U.I. Approved</li> <li>• Low Angle</li> <li>• Omni-Directional</li> <li>• Low Angle</li> <li>• Omni-Directional</li> <li>• Non-Position Sensitive</li> <li>• CM1344-0 (1 Electrode)</li> <li>• CM1344-1 (2 Electrodes)</li> <li>• Compact</li> <li>• Non-Position Sensitive</li> <li>• CM4000-0 (1 Electrode)</li> <li>• CM4000-1 (2 Electrodes)</li> <li>• High Switching Current</li> <li>• Encapsulated</li> <li>• High Switching Current</li> <li>• Supplied with mounting clip</li> <li>• High Switching Current</li> <li>• Supplied with mounting clip</li> <li>• High Switching Current</li> <li>• Supplied with mounting clip</li> <li>• Robust Construction</li> <li>• Heavy Duty Switching</li> <li>• Clear Housing</li> <li>• Also available in cylindrical housing (TSM 4/240, and 20° Vertical / 5° Horizontal angle 110V (TSM 40/110))</li> </ul>																																			
Description	Tilt Switch																Tip-Over Switch																Description	Tip-Over Switch								Movement / Vibration				Tilt Module				Tip-Over Module			
Type	CM100-0	CM200-0	CM225-0	CM1000-0	CM1020-0	CM1200-0	CM1300-0	CM1320-0	CM1323-0	CM1600-0	CM1260-0	CM1360-0	CM1365-0	CM1370-12	CM1415-0	CM1425-0	Type	CM1445-0	CM1535-5	CM1715-0	CM1745-0	CM1344-0	CM1800-1	CM4400-0	CM1000-70	CM1000-90	S1016	S1017	CM1320-90 / S1039*	CM1535-70 / S1116*	TSM 4/240	TSM 10/240																					
Contact Form / Style	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Normally Open	Normally Open	Normally Open	Dependent on mounting	Normally Closed	Normally Open	Contact Form / Style	Normally Open	Normally Closed	Normally Closed	Normally Closed	Normally Open	Dependent on mounting	Normally Open	Dependent on mounting	Dependent on mounting	Dependent on mounting	Dependent on mounting	Normally Closed	Dependent on mounting	Dependent on mounting																						
Switching Voltage Max.	120 VAC	120VAC	120VAC	120VAC	120VAC	120VAC	120VAC	120VAC	240VAC	24VDC	120VAC	120VAC	120VAC	120VAC	120VAC	120VAC	Switching Voltage Max.	120VAC	120VAC	120VAC	120VAC	60VAC	120VAC/DC	120VAC	240VAC	240VAC	240VAC	240VAC	240VAC	240VAC	240VAC																						
Switching Current Max. A	1.0A at 120VAC	2.0A at 120VAC	2.0A at 120VAC	10.0A at 120VAC	10.0A at 120VAC	0.2A at 120VAC	0.5A at 120VAC	0.25A at 120VAC	0.2A at 240VAC	0.15	0.2A at 120VAC	0.25A at 120VAC	0.25A at 120VAC	0.25A at 120VAC	1A at 120VAC	1A at 120VAC	Switching Current Max. A	1.0A at 120VAC	12.5A at 120VAC	1.5A at 120VAC	1.5A at 120VAC	0.1	0.1 at 120VAC	0.2 at 120VDC	0.1	5.0 at 240VAC	10.0 at 120VAC	10 at 240VAC	15 at 240VAC	1 at 240VAC	1.8 at 120VAC	12.5 at 120VAC	0.55	0.5																			
Switching Capacity Max. VA	120	240	240	1200	1200	24	60	48	48	3.6	24	30	30	60	120	120	Switching Capacity Max. VA	120	1500	180	180	3	-	-	1200	1200	2400	3600	100	1500	10	50																					
Differential Angle (Tilt Switches) Max.°	10	10	25	10	10	10	10	10	10	2	60 +/- 10	15	45 - 75	60 +/- 10	15 +/- 4	25 +/- 10	Differential Angle (Tilt Switches) Max.°	45 +/- 10	35 +/- 10	15 +/- 3	45 +/- 10	N/A	N/A	N/A	10	10	15	15	10	35	4	10																					
Operating Angle (Tip-Over Switches) Min-Max.°																	Operating Angle (Tip-Over Switches) Min-Max.°																																				
Contact Resistance Max. Ohms	3	3	3	3	3	1	3	1	1	5	3	10	3	3	2	3	Contact Resistance Max. Ohms	3	5	5	5	-	5	-	5	5	0.3	0.3	0.3	5	0.25	0.25																					
Operating Temperature Max. °C	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	Operating Temperature Max. °C	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-37 +100	-20 +70	-20 +70	-20 +70	-20 +105	-20 +70	-20 +85																					
Storage Temperature Max. °C	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	Storage Temperature Max. °C	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-40 +125	-25 +75	-25 +75	-25 +70	-25 +115	-25 +70	-20 +90																					
Case Material	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Case Material	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	Steel Tin Plated	ABS	ABS	ABS	ABS	ABS	Polypropylene	Clear Polystyrene	Nylon 66																					
Mounting Clip / Cable	3BH	3BH	3BH	-	-	3BH	1A	1A	1A	1A	-	1A	-	-	-	-	Mounting Clip / Cable	3BH	-	-	-	3BH	1A	3BH	2 x 18 AWG Neoprene insulated	2 x 18 AWG Neoprene insulated	2 x 0.52mm <sup>2</sup> round Silicone (with eyelets)	2 x 17 AWG Silicone insulated (with eyelets)	2 x 0.22mm <sup>2</sup> PVC insulated	2 x 17 AWG Silicone insulated	-	2 x 0.22mm <sup>2</sup> PVC insulated																					

