

Product Search Data Sheet


Note: This datasheet may be out of date Please download the latest datasheet of NFA21SL806X1A48# from the official website of Murata Manufacturing Co., Ltd. .com/en-SG/products/productdetail?partno=NFA21SL806X1A48%23

NFA21SL806X1A48#

"#" indicates a package specification code.

In Production RoHS REACH

< List of part numbers with package codes > NFA21SL806X1A48B NFA21SL806X1A48L

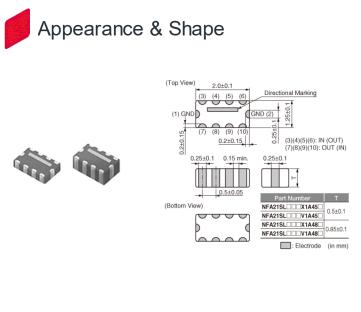



Packaging Information

Packaging	Specifications	Minimum Order Quantity
В	Bulk(Bag)	1000
L	180mm Embossed Tape	4000



- 1. Steep insertion loss characteristics
- 2. Suitable for noise suppression in 800MHz or higher frequency
- 3. Size: 2.0x1.25mm
- 4.4 circuits in one package

Applications Noise suppression for LCD line

Applications

Other Usage

For general

1 of 3

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Attention



Product Search Data Sheet

Note: This datasheet may be out of date. Please download the latest datasheet of NFA21SL806X1A48# from the official website of Murata Manufacturing Co., Ltd. http://www.murata.com/en-SG/products/productdetail?partno=NFA21SL806X1A48%23

NFA21SL806X1A48# "#" indicates a package specification code.

Specifications

Shape	SMD	
Size Code (in mm)	2012	
Length	2.0mm	
Size Code (in inch)	0805	
Length Tolerance	±0.1mm	
Width	1.25mm	
Width Tolerance	±0.1mm	
Thickness	0.85mm	
Thickness Tolerance	±0.1mm	
Rated Current	20mA	
Operating Temperature Range	-55°C to 125°C	
Mass(typ.)	0.012g	
Number of Circuit	4	
Rated Voltage	10Vdc	
Withstanding Voltage	30Vdc	
Insulation Resistance(min.)	1000ΜΩ	
Nominal Cut-off Frequency	80MHz	
Insertion Loss	2dB to 7dB(at Cut-off Frequency),25dB min.(at 500MHz),25dB min.(at 1000MHz)	

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.






Product Search Data Sheet

Note: This datasheet may be out of date Please download the latest datasheet of NFA21SL806X1A48# from the official website of Murata Manufacturing Co., Ltd. n/en-SG/products/productdetail?partno=NFA21SL806X1A48%23


NFA21SL806X1A48#

"#" indicates a package specification code.


Product Data

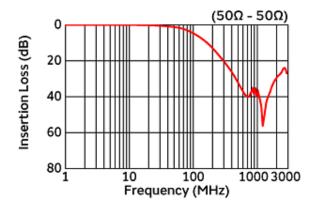

Insertion Loss Characteristics

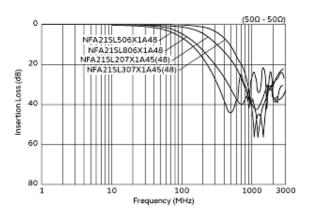

Insertion Loss Characteristics (Main Items)

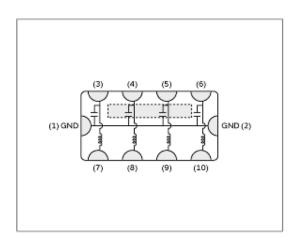

Equivalent Circuit

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

