

Coaxial Cable RG179

multicomp PRO

RoHS
Compliant



Product Description:

Application	For communication and signal control systems
Cable Construction:	
Conductor	Tinned Copper
Construction	0.36 Solid
Standard Dia.(mm)	0.36
Insulation	Foam - Skin PE
Nom. Thickness (mm)	0.62
Nom. Insulation Dia.	1.6
Insulation Colour	Nature
Braiding Shield (mm)	Tinned Copper
Construction	0.1 × 16 × 6
Braiding Coverage	95%
Jacket	PE
Nom. Thickness(mm)	0.25
Nom. Dia.	2.6
Jacket Colour	Black
Marking (White Ink)	RG 179 75Ω PE (WW YY)
Packaging	100m Reel


Electrical Characteristics:

Max. Conductor DC Resistance at 20°C (Ω/Km)	<186
Min. Insulation DC Resistance at 20°C (MΩ × Km)	>100
Operating Temperature (°C)	-30 to +70
Rated Voltage(V)	30
Capacitance(pF/m)	54 ±5
Velocity Ratio(%)	80
Impedance(Ω)	75 ±3
Attenuation at 20°C (dB/100m) (±8%)	
10MHz	6
100MHz	19.5
200MHz	28

Coaxial Cable RG179

multicomp^{PRO}

Design:

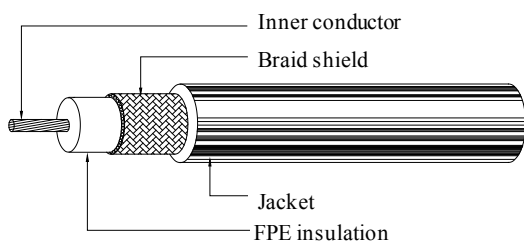

Part Number Table

Description	Part Number
Cable, Coaxial, 100m, Black, RG179, PE	PP000613

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp^{PRO}