

Adaptor SMA Jack-N Plug


multicomp PRO



Specifications:

Frequency : DC-11GHz
 Bodies : Brass per JIS-C3604
 Centre Contact : Beryllium copper per ASTM B196 UNS C17300
 Insulation : PTFE per ASTM D1457 and ASTM D1710
 Connector interface per MIL-STD-348A
 Part to be clean and free of burrs

Diagram

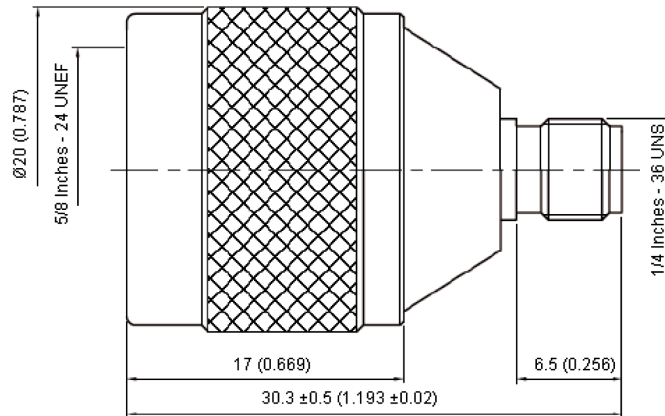

Dimensions : Millimetres (Inches)

Specification Table

No.	Description	Material	Finish
1	Shell	Brass	Nickel 100µ Inches Min.
2	Gasket	Silicone	Red
3	Body I	Brass	Nickel 100µ Inches Min.
4	Washer		None
5	Centre Contact	Beryllium Copper	Gold
6	Body II	Brass	Nickel 100µ Inches Min.
7	Insulation	PTFE	None

Part Number Table

Description	Part Number
Adapter, N Plug, SMA Jack, 50Ω	MP-19-34-2

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO