



### SVxx25xx Series

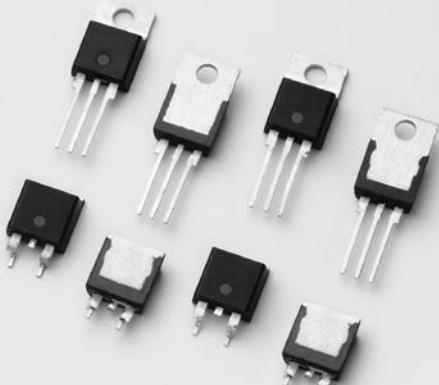

#### Main Features

Symbol	Value	Unit
$I_{(RMS)}$	25	A
$V_{DRM}/V_{RRM}$	600	V
$I_{GT}$	6 to 10	mA

#### Schematic Symbol

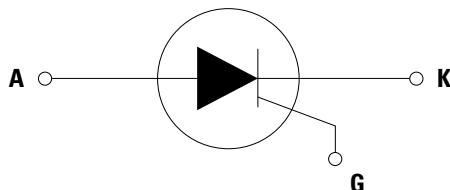

#### Description

This SVxx25xx high temperature SCR series is ideal for uni-directional switch applications such as phase control in heating, motor speed controls, converters/rectifiers and inrush current controllers.

These SCRs have a low gate current, (IGT) trigger level of 6mA and 10mA maximum at approximately 1.5V for SVxx25x1 and SVxx25x2, respectively.

#### Features & Benefits

- Halogen free and RoHS compliant
- Surge capability up to 350 A at 60 Hz half cycle
- 150°C maximum junction temperature
- High dv/dt performance

#### Applications

Typical applications include AC Generator (ACG) rectifiers, battery voltage regulators, generic converters, inrush current controller in various AC to DC applications and soft starter for low power AC motor. Additional applications include controls for power tools, home/brown good and white goods appliances.

Internally constructed isolated packages offered for ease of heat sinking with high isolation voltage.

### Absolute Maximum Ratings

Symbol	Parameter	Test Conditions		Value	Unit
$V_{DSM}/V_{RSM}$	Peak non-repetitive blocking voltage	$P_w = 100 \mu s$		800	V
$I_{T(RMS)}$	RMS on-state current	SVxx25Lx	$T_c = 100^\circ C$	25	A
		SVxx25Rx SVxx25Nx	$T_c = 125^\circ C$		
$I_{T(AV)}$	Average on-state current	SVxx25Lx	$T_c = 100^\circ C$	16	A
		SVxx25Rx SVxx25Nx	$T_c = 125^\circ C$		
$I_{TSM}$	Peak non-repetitive surge current	single half cycle; $f = 50Hz$ $T_j$ (initial) = $25^\circ C$		300	A
		single half cycle; $f = 60Hz$ $T_j$ (initial) = $25^\circ C$		350	
$I^2t$	$I^2t$ Value for fusing	$t_p = 8.3 ms$		510	$A^2s$
$di/dt$	Critical rate of rise of on-state current	$f = 60Hz ; T_j = 150^\circ C$		125	$A/\mu s$
$I_{GM}$	Peak gate current	$T_j = 150^\circ C$		4	A
$P_{G(AV)}$	Average gate power dissipation	$T_j = 150^\circ C$		0.8	W
$T_{stg}$	Storage temperature range			-40 to 150	$^\circ C$
$T_j$	Operating junction temperature range			-40 to 150	$^\circ C$

Note: xx=voltage/10, x=sensitivity

### Electrical Characteristics ( $T_j = 25^\circ C$ , unless otherwise specified)

Symbol	Test Conditions	SVxx25x1	SVxx25x2	Unit
$I_{GT}$	$V_D = 12V R_L = 60 \Omega$	MAX.	6	10
		MIN.	2	5
$V_{GT}$	$V_D = 12V R_L = 60 \Omega$	MAX.	1.5	V
$dv/dt$	$V_D = 67\% V_{DRM}$ ; gate open; $T_j = 125^\circ C$	MIN.	400	800
	$V_D = 67\% V_{DRM}$ ; gate open; $T_j = 150^\circ C$		200	400
$V_{GD}$	$V_D = V_{DRM} R_L = 3.3 k\Omega T_j = 125^\circ C$	MIN.	0.2	V
$I_H$	$I_T = 400mA$ (initial)	MAX.	22	35
$t_q$	$I_T = 2A; t_p = 50\mu s; dv/dt = 5V/\mu s; di/dt = 30A/\mu s$	MAX.	25	$\mu s$
$t_{gt}$	$I_G = 2 \times I_{GT} PW = 15\mu s I_T = 50A$	TYP.	2.6	$\mu s$

Note: xx=voltage/10, x=package

### Static Characteristics


Symbol	Test Conditions	Value	Unit	
$V_{TM}$	Component $I_T = 50A; t_p = 380 \mu s$ $V_{DRM} = V_{RRM}$	MAX.	$\mu A$	
$I_{DRM} / I_{RRM}$		1.6		
		10		
		1000		
		4000		

### Thermal Resistances


Symbol	Parameter	Value	Unit
$R_{eUCI}$	Junction to case (AC)	SVxx25Rx SVxx25Nx	$^\circ C/W$
		SVxx25Lx	

Note: xx=voltage/10, x=package


**Figure 1: Normalized DC Gate Trigger Current vs. Junction Temperature**

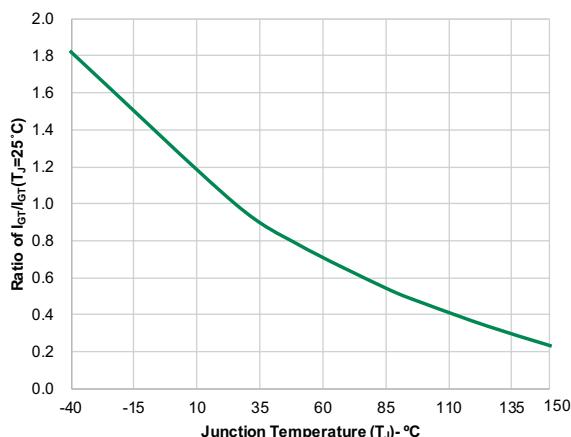


**Figure 2: Normalized DC Gate Trigger Voltage vs. Junction Temperature**

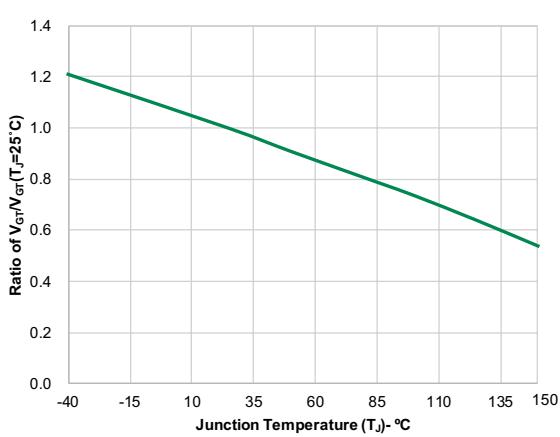


**Figure 3: Normalized DC Holding Current vs. Junction Temperature**

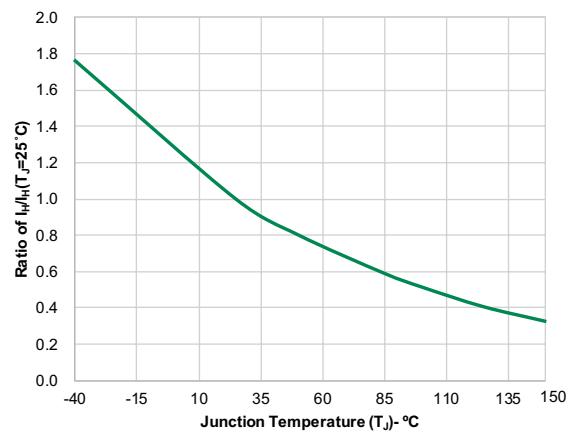


**Figure 4: On-State Current vs. On-State Voltage (Typical)**

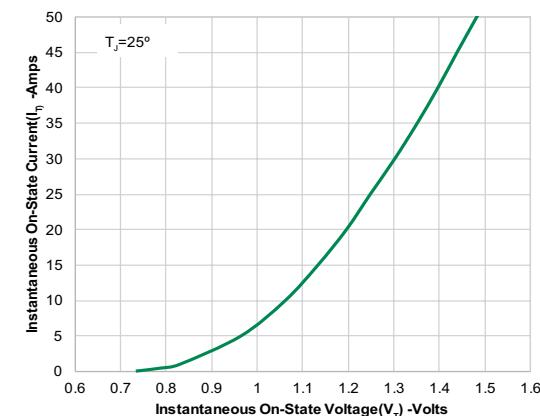


**Figure 5: Power Dissipation (Typical) vs. RMS On-State Current**

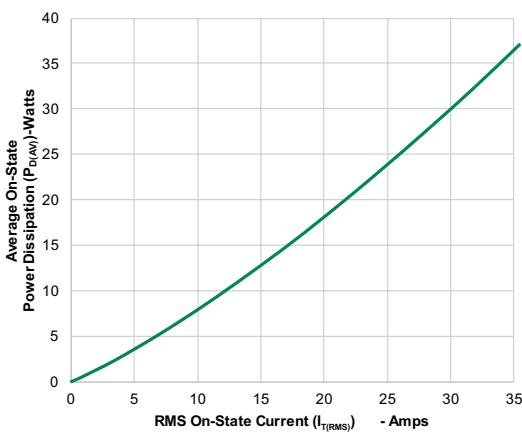


**Figure 6: Maximum Allowable Case Temperature vs. RMS On-State Current**

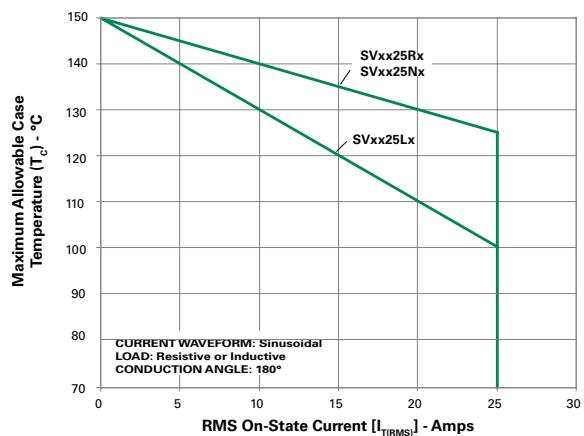


**Figure 7: Maximum Allowable Case Temperature vs. Average On-State Current**

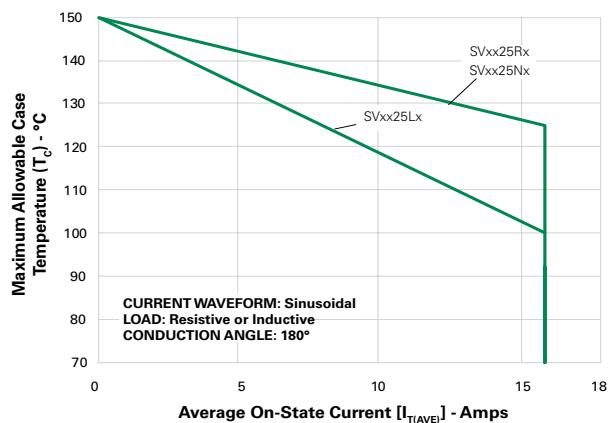


**Figure 8: Peak Capacitor Discharge Current**

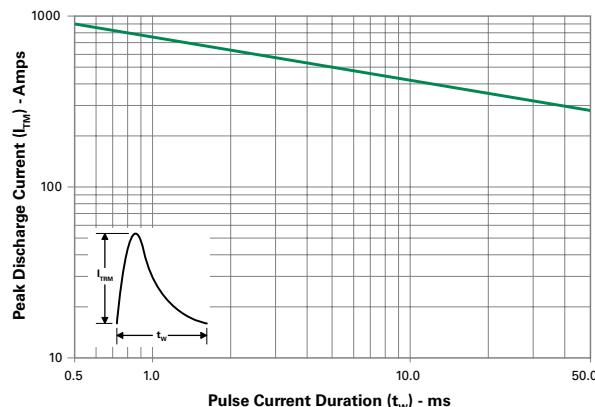

**Figure 9: Peak Capacitor Discharge Current Derating**

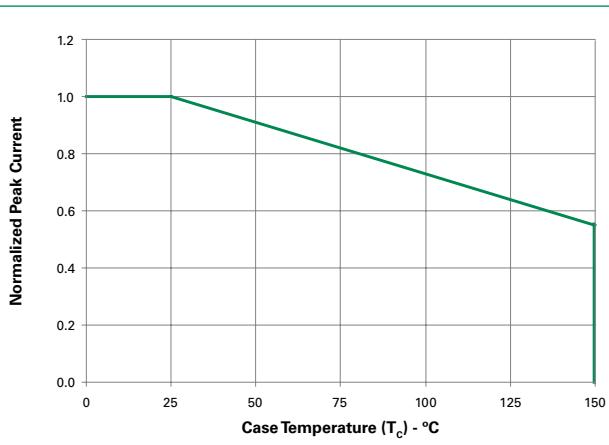

**Figure 10: Surge Peak On-State Current vs. Number of Cycles**

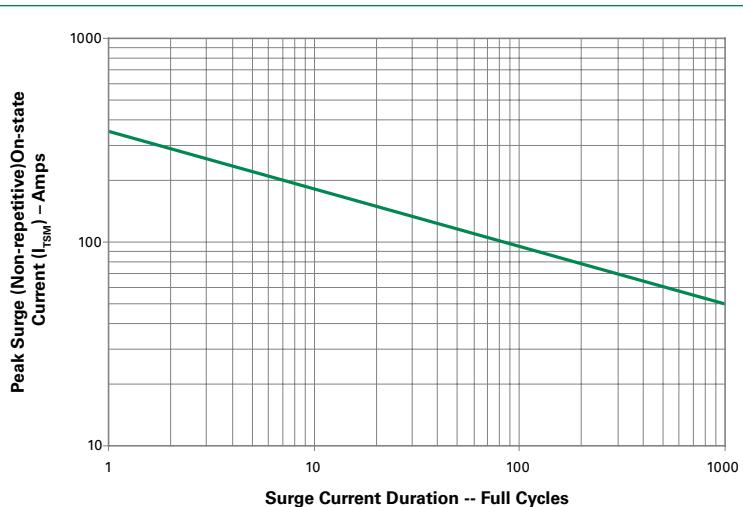


SUPPLY FREQUENCY: 60 Hz Sinusoidal  
LOAD: Resistive  
RMS On-State Current:  $[I_{T(RMS)}]$ : Maximum Rated Value at Specified Case Temperature

Notes:

1. Gate control may be lost during and immediately following surge current interval.
2. Overload may not be repeated until junction temperature has returned to steady-state rated value.

### Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ( $T_{s(min)}$ )	150°C
	- Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_s$ )	60 – 180 secs
<b>Average ramp up rate (Liquidus Temp) (<math>T_L</math>) to peak</b>		
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		
Reflow	- Temperature ( $T_L$ ) (Liquidus)	217°C
	- Time ( $t_L$ )	60 – 150 seconds
<b>Peak Temperature (<math>T_p</math>)</b>		
<b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>		
<b>Ramp-down Rate</b>		
<b>Time 25°C to peak Temperature (<math>T_p</math>)</b>		
<b>Do not exceed</b>		
280°C		

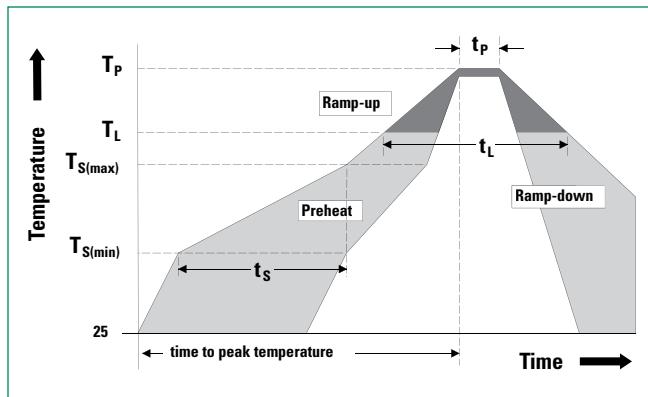

### Physical Specifications

<b>Terminal Finish</b>	100% Matte Tin-plated
<b>Body Material</b>	UL Recognized compound meeting flammability rating V-0
<b>Lead Material</b>	Copper Alloy


### Design Considerations

Careful selection of the correct component for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the component rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

### Environmental Specifications


Test	Specifications and Conditions
<b>AC Blocking</b>	MIL-STD-750, M-1040, Cond A Applied Peak AC voltage @ 150°C for 1008 hours
<b>Temperature Cycling</b>	MIL-STD-750, M-1051, 1000 cycles; -55°C to +150°C; 15-min dwell-time
<b>Temperature/Humidity</b>	EIA / JEDEC, JESD22-A101 1008 hours; 160V - DC: 85°C; 85% rel humidity
<b>Resistance to Solder Heat</b>	MIL-STD-750 Method 2031
<b>Solderability</b>	ANSI/J-STD-002, category 3, Test A
<b>Lead Bend</b>	MIL-STD-750, M-2036 Cond E
<b>Moisture Sensitivity Level</b>	Level 1, JEDEC-J-STD-020D

### Dimensions — TO-220AB (L-Package) — Isolated Mounting Tab

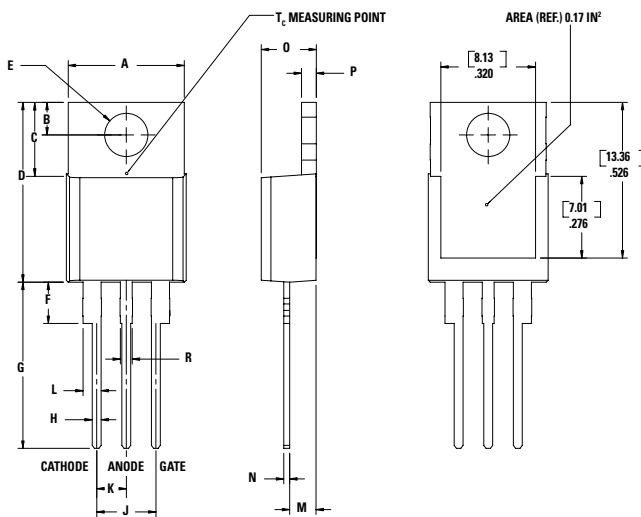


Dimension	Inches		Millimeters	
	Min	Max	Min	Max
<b>A</b>	0.380	0.420	9.65	10.67
<b>B</b>	0.105	0.115	2.67	2.92
<b>C</b>	0.230	0.250	5.84	6.35
<b>D</b>	0.590	0.620	14.99	15.75
<b>E</b>	0.142	0.147	3.61	3.73
<b>F</b>	0.110	0.130	2.79	3.30
<b>G</b>	0.540	0.575	13.72	14.61
<b>H</b>	0.025	0.035	0.64	0.89
<b>J</b>	0.195	0.205	4.95	5.21
<b>K</b>	0.095	0.105	2.41	2.67
<b>L</b>	0.060	0.075	1.52	1.91
<b>M</b>	0.085	0.095	2.16	2.41
<b>N</b>	0.018	0.024	0.46	0.61
<b>O</b>	0.178	0.188	4.52	4.78
<b>P</b>	0.045	0.060	1.14	1.52
<b>R</b>	0.038	0.048	0.97	1.22

### Dimensions — TO-220AB (R-Package) — Non-Isolated Mounting Tab Common with Center Lead

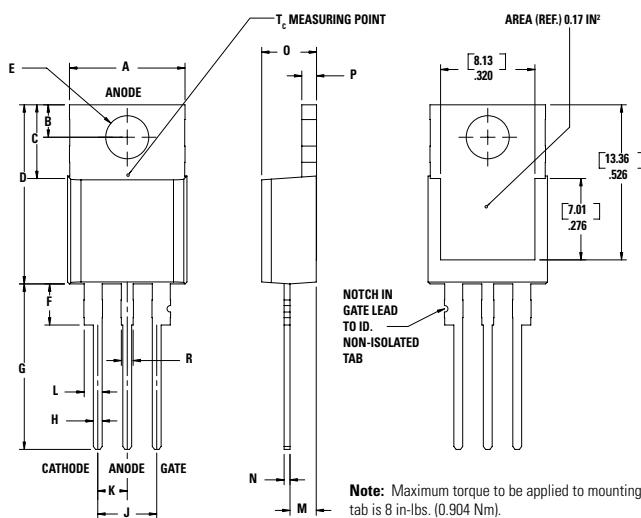

Dimension	Inches		Millimeters	
	Min	Max	Min	Max
<b>A</b>	0.380	0.420	9.65	10.67
<b>B</b>	0.105	0.115	2.67	2.92
<b>C</b>	0.230	0.250	5.84	6.35
<b>D</b>	0.590	0.620	14.99	15.75
<b>E</b>	0.142	0.147	3.61	3.73
<b>F</b>	0.110	0.130	2.79	3.30
<b>G</b>	0.540	0.575	13.72	14.61
<b>H</b>	0.025	0.035	0.64	0.89
<b>J</b>	0.195	0.205	4.95	5.21
<b>K</b>	0.095	0.105	2.41	2.67
<b>L</b>	0.060	0.075	1.52	1.91
<b>M</b>	0.085	0.095	2.16	2.41
<b>N</b>	0.018	0.024	0.46	0.61
<b>O</b>	0.178	0.188	4.52	4.78
<b>P</b>	0.045	0.060	1.14	1.52
<b>R</b>	0.038	0.048	0.97	1.22

### Dimensions – TO- 263AB (N-package) – D<sup>2</sup>-Pak Surface Mount

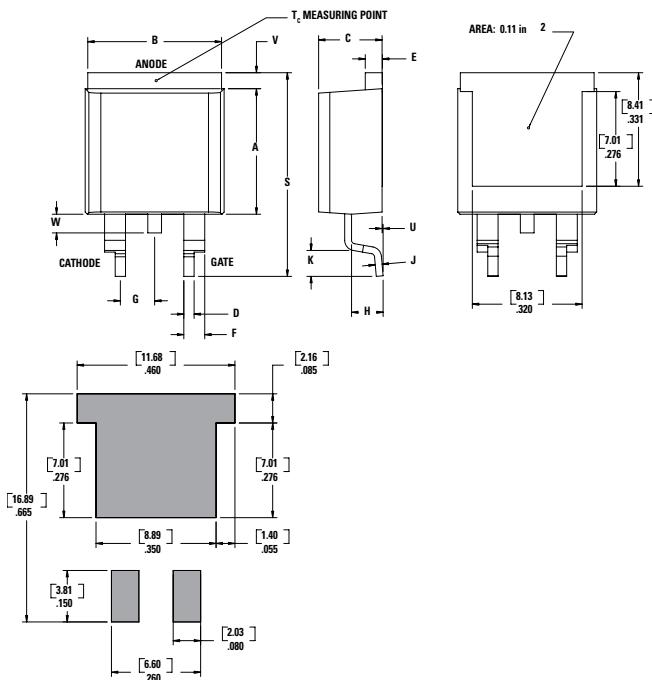

Dimension	Inches		Millimeters	
	Min	Max	Min	Max
A	0.360	0.370	9.14	9.40
B	0.380	0.420	9.65	10.67
C	0.178	0.188	4.52	4.78
D	0.025	0.035	0.64	0.89
E	0.045	0.060	1.14	1.52
F	0.060	0.075	1.52	1.91
G	0.095	0.105	2.41	2.67
H	0.092	0.102	2.34	2.59
J	0.018	0.024	0.46	0.61
K	0.090	0.110	2.29	2.79
S	0.590	0.625	14.99	15.88
V	0.035	0.045	0.89	1.14
U	0.002	0.010	0.05	0.25
W	0.040	0.070	1.02	1.78

### Product Selector

Part Number	Voltage	Gate Sensitivity	Type	Package
	600V			
SVxx25L1	X	6mA	Standard SCR	TO-220L
SVxx25R1	X	6mA	Standard SCR	TO-220R
SVxx25N1	X	6mA	Standard SCR	TO-263
SVxx25L2	X	10mA	Standard SCR	TO-220L
SVxx25R2	X	10mA	Standard SCR	TO-220R
SVxx25N2	X	10mA	Standard SCR	TO-263


Note: xx = Voltage/10, x=sensitivity

### Packing Options

Part Number	Marking	Weight	Packing Mode	Base Quantity
SVxx25LxTP	SVxx20Lx	2.2g	Tube	1000 (50 per tube)
SVxx25RxTP	SVxx20Rx	2.2g	Tube	1000 (50 per tube)
SVxx25NxTP	SVxx20Nx	1.6g	Tube	1000 (50 per tube)
SVxx25NxRP	SVxx20Nx	1.6g	Embossed Carrier	500


Note: xx=voltage/10, x=sensitivity

### Part Numbering System

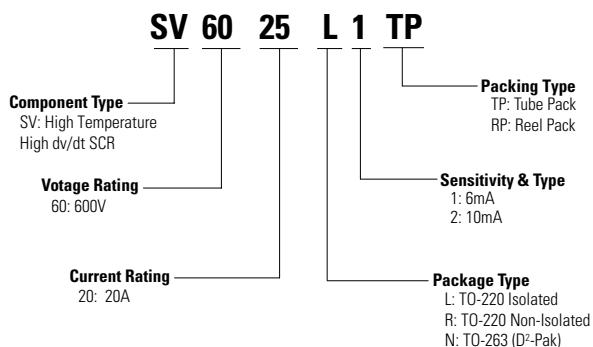

### Part Marking System

TO-220 AB - (L and R Package)  
TO-263 AB - (N Package)

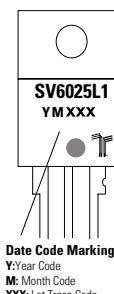

### TO-263 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-2 Standards

