
High Quality Power Cord UL Certificated multicomp PRO

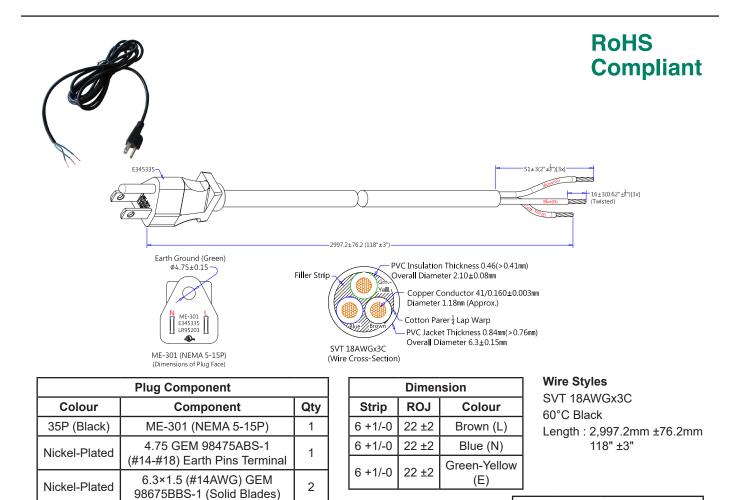

Dimensions	Millimetres

Black

Note:

- 1. Hi-Pot Test : 1,500V/1Sec; <0.5mA
- 2. Insulation Resistance Test : DC 500/min>100m $\!\Omega$
- 3. Continuity & Polarization Test : No short circuit, break circuit, displacement.

301-1 (5-15P Inner Body)

4. Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.

1

- 5. Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
- 6. All material according to Non-toxic standard.

Part Number Table

Description	Part Number
5-15P, SVT, CEE, 18×3, 10A 125V	MC-194

ROJ

51 ±6

51 ±6

51 ±6

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Dimensions

Colour

Brown (L)

Blue (N)

Green-Yellow (E)

Strip

16 ±3

16 ±3

16 ±3