

RG58 Coaxial Cable

multicompPRO

**RoHS
Compliant**



Product Description:

Application	For communication and signal control systems
Multi-construction	1

Cable Construction:

Conductor	Tinned Copper
1 Singles	
Construction	T0.18 ± 0.008 × 19
Standard Dia.(mm)	0.9
Insulation Layer	Solid PE
Thickness (mm)	1.03
Insulation Dia.(±0.15mm)	2.95
Insulation Colour	Natural
Braiding Layer	Tinned Copper
Construction (Standard)	T0.12 ± 0.008 × 112
Braiding Coverage	94%
Jacket	LSZH
Thickness (mm)	0.65
Dia.(±0.15mm)	4.95
Jacket Colour	Black
Packaging	100m/Cardboard Reel


Electrical Characteristics:

Max. Conductor DC Resistance at 20°C (Ω/km)	39.2
Min. Insulation DC Resistance at 20°C (MΩ × km)	>500
Operating Temperature Range	-30°C to +80°C
Rated Voltage(V)	1,900V RMS
Capacitance (pF/m)	100 ± 5
Velocity Ratio (%)	66
Impedance (Ω)	50 ± 3
Attenuation at 20°C (dB/100m) (±8%)	
100MHz	21
200 MHz	31
1,000MHz	76
Flame Retardancy	IEC 60332-1, UL VW-1

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Design:

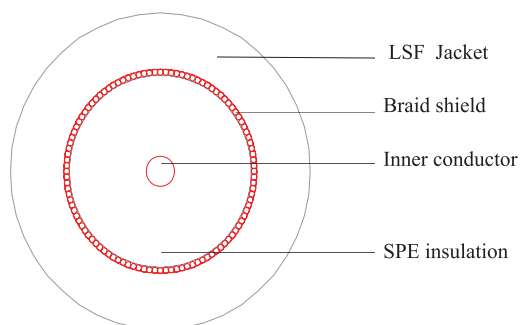

Part Number Table

Description	Part Number
Coaxial Cable, RG58, Black, 100m	PP000627

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.