PrintDry™

# Filament Dryer PRO
## for 3D Printing

**The effective solution for moisture-related 3D printing problems, such as:**

- filament crackling, popping & clogging
- weak printed model
- poor surface quality
- print failing

**Good for:**

- drying filament before printing
- feeding & drying filament during printing
- regenerated desiccant pouches

**Features:**

- good for spools with ϕ4-[illegible]
  , < 4.5 lbs[illegible]
- dryer temperature: 95-165°F[illegible]
- continuous drying time: up to 48 hours
- Double-wall structure
- Built-in temperature sensor
- used for both 1.75mm or 3mm filaments

«««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««««

PrintDry™

# Vacuum-sealed Filament Container
## for 3D Printing

Max Spool Size: ϕ8"x 3.3"

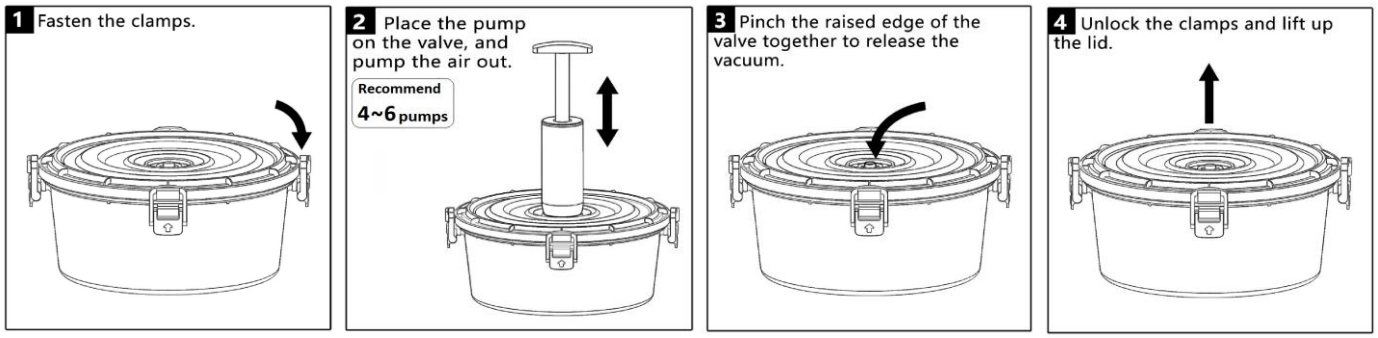


**PrintDry Reseller:**

PrintDry filament dryers/containers have been used for drying & storing filaments for 10000+ users in 50+ countries. Please visit www.printdry.com for more information.

Copyright 2021 TDL Systems Inc. v4.0