

Type C Rechargeable NIMH Battery

1.2V, 4500mAh

multicomp PRO

**RoHS
Compliant**



Description

Sealed Nickel-Metal Hydride Cylindrical Rechargeable Battery Cells.

Scope of Application:

Type C (High Top)

Nominal Voltage		1.2V/cell
Capacity	Typical	4500 mAh/0.2 CmA@20°C
	Minimum	4000 mAh/0.2 CmA@20°C
Charge	Standard	0.1 CmA for 16 hrs.
	Rapid	0.3CmA for 3.6hrs.(approx.) -ΔV = 0~5mV/cell, Temp. cut-off = 45°C to 50°C, dT / dt=0.8°C/ min. Ta = 0°C to 40°C.
	Trickle	0.03 CmA (time must to be advised from NEXcell according to the condition of cut-off)
Maximum Discharge Current		1.0CmA (Continuous) 3.0CmA (Pulse)
Discharge Cut-off Voltage		1.0 V/cell
Cycle Life		500 cycles (see Note:6)
Applicable Temperature	Standard Charge	0°C to +45°C
	Rapid Charge	0°C to +40°C
	Discharge	-10°C to +60°C
Storage	Within 6 months	-20°C to +20°C
	Within 3 months	-20°C to +30°C
	Within 1 month	-20°C to +40°C
Relative Humidity Range		65%±20%
Dimension		D = 25.5 mm max., H = 50.0 mm max.
Weight		Approx. 86.0 g

- This specification is available only for the testing within one month since receipt of battery packs
- To keep the best performance for those not used for a long time, we recommend to charge the cells/batteries at least 30% after discharge entirely in every 6 months.
- Note: Specifications are subject to be modified without prior notice.

Type C Rechargeable NIMH Battery

1.2V, 4500mAh

multicomp PRO

Performance:

Unless otherwise stated, tests should be done within 45 days of delivery under the following

Conditions:

Ambient Temperature, Ta : 20 + 5°C

Relative Humidity : 65 + 20% RH

Standard Charge / Discharge Condition

Charge : 0.1 CmAx 16 hours

Discharge : 0.2 CmAx to 1.0 V/cell


Test Item	Test Method	Performance	Remarks
Capacity	Standard Charge Standard Discharge	No less than rated capacity	Up to 3 cycles are allowed
High Rate Discharge (1.0CmA)	Standard Charge 1 hour rest before discharge	No less than 80% of rated capacity	
Low Temperature Discharge	Discharge at 0.2CmA in 0±2° for 16 to 24 hours stand after a standard charge	No less than 70% of rated capacity	
Terminal Voltage Open Circuit Voltage	Within 1 hour after standard charge	No less than 1.25V/cell in terminal voltage	
Cycle Life	IEC 61951-2 (2003) 7.4.1.1	Over 500 cycles	See Note:6
Charge Retention	Standard Charge Storage 28 days at 20 + 2°C Standard Discharge	No less than 60% of rated Capacity	
Overcharge	Charge at 0.1CmA for 48 hours Standard Discharge	No less than rated capacity	
Over-discharge	Standard Charge Discharge at 2.0CmA to 1.0 V/ cell Over-discharge at 1.0CmA for 1 hour	The cell shall not explode The safety valve of the cell shall operate	
Vibration Amplitude Frequency Direction and Time	3.6mm peak to peak 1000 cpm Arbitrary direction / 1 hour	The cell shall be normality in appearance No less than 1.2V/cell in terminal voltage.	
Shock Dropping Distance Shock Board Dropping Time	0.45 m (spontaneous dropping) Hard wood (Thickness: over 10 mm) Arbitrary direction / 3 times	The cell shall be normality in appearance No less than 1.2Vcell in terminal voltage	
Leakage	Standard Charge Storage : 14 days in 33 + 5°C and 80 + 5% RH	The cell shall have no visible leakage	
Short Circuit	After standard charge, short circuit by 2 mm Ni-tab for 1 hour	Leakage and deformation may occur, but no explosion is allowed	

Type C Rechargeable NIMH Battery

1.2V, 4500mAh

multicomp PRO

Charge/Discharge Curve

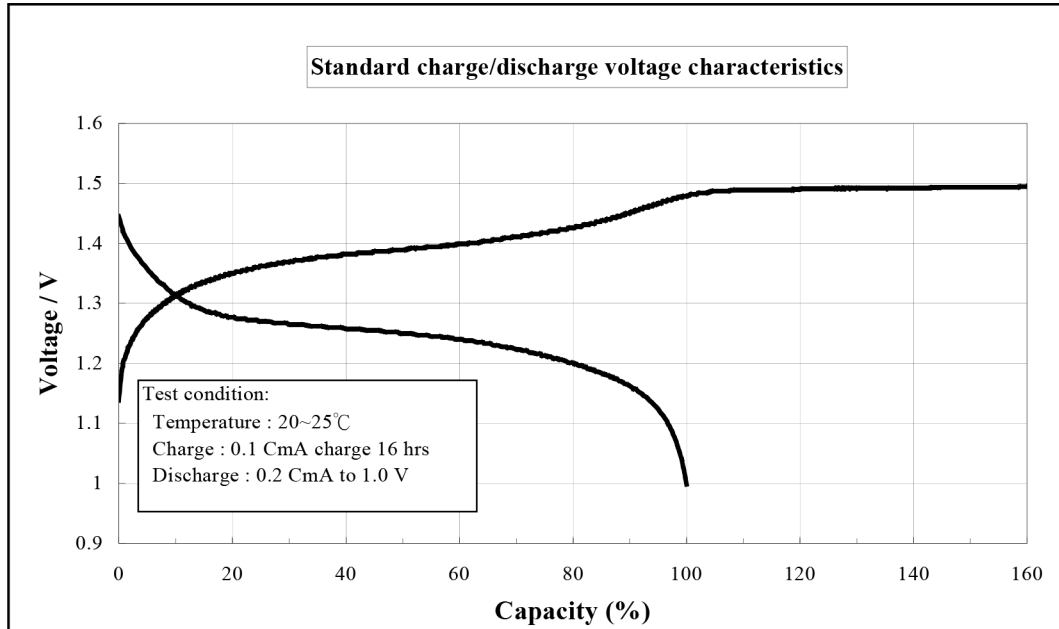

Part Number Table	
Description	Part Number
Rechargeable NIMH Battery, Type C, 1.2V, 4500mAh	MP005527

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO