


SPECIFICATION				
Product Range:	RX20A	RX20B	RX20T	RX20K
Forward Gain	14.5dBi	15dBi	15.7dBi	15.7dBi
Front/Back Ratio	19dB	19dB	19dB	19dB
Acceptance Angle deg ± 20°		20°	20°	20°
Windage N (at 130km	n/h) 85N	80N	75N	75N
Length	1565mm	1450mm	1565mm	1565mm
Frequency Range	470-606MHz	470-734MHz	470-790MHz 4	70-694MHz



The unique dipole makes the Antiference RX aerial is an innovative and superior solution for medium signal areas. The practical design allows it to be mounted vertically or horizontally whilst the Group T option has an F connector fitting.



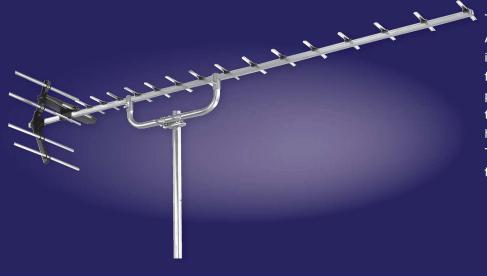

SPECIFICATION				
Product Range:	RX12A	RX12B	RX12T	RX12T
Forward Gain	12.5dBi	12.7dBi	12.9dBi	12.9dBi
Front/Back Ratio	17dB	17dB	17dB	17dB
Acceptance Angle deg ± 23°		23°	23°	23°
Windage N (at 130kr	m/h) 65N	63 N	61N	61N
Length	1089mm	975mm	975mm	975mm
Frequency Range	470-606MHz 47	0-734MHz 47	70-790MHz 4	170-694MHz

The Antiference RX12 is one of our most popular aerials and offers the perfect solution for strong signal areas. It is suitable for horizontal or vertical mounting. The group T has F connector fitting with groups being more traditional saddle and clamp.























50