
## MTi-1

- Miniature form factor (12x12 mm)
- Easy integration
- Development Kit available

The MTi-1 is a self-contained Inertial Measurement Unit (IMU) as a 12.1 x 12.1 mm module. The Xsens optimized strapdown algorithm (AttitudeEngineTM) performs high-speed dead-reckoning calculations at 1 kHz allowing accurate capture of high frequency motions.The MTi-1 IMU is a cost-effective module for a wide range of (embedded) applications. It relieves users from the design, integration and maintenance of gyroscopes, accelerometers and other sensors. The MTi-1 is supported by the MT Software Suite which includes MT Manager (GUI for Windows/Linux), SDK, example codes and drivers for many platforms.

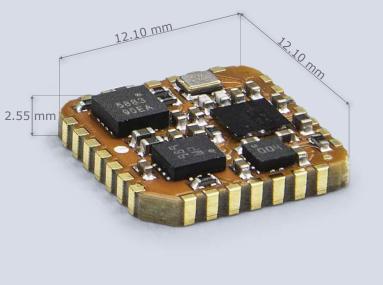

IMU Performance	
Accelerometer	Calibrated
Gyroscope	Calibrated
Strapdown Integration (SDI)	Yes
Gyroscope	
Standard full range	2000 deg/s
In-run bias stability	10 deg/h
Bandwidth (-3dB)	255 Hz
Noise Density	0.007 º/s/√Hz
g-sensitivity (calibr.)	0.001 º/s/g
Accelerometer	
Standard full range	16 g
In-run bias stability	30 µg
Bandwidth (-3dB)	324 (x,y) 262 (z) Hz
Noise Density	120 µg/√Hz
Magnetometer	
Standard full range	+/- 8 G
Total RMS noise	0.5 mG
Non-linearity	0.2%
Resolution	0.25 mG
GNSS Receiver	
GNSS receiver interface	n/a
GNSS precision	n/a
RTCM input port	n/a
Barometer	
Barometer interface	n/a

Mechanical		
IP-rating Operating Temperature Casing material Mounting orientation Dimensions Connector Weight	IP00 -40 to 85 °C PCB No restriction, full 360° in all axes 12.1 x 12.1 x 2.55 mm SMD, footprint compatible with JEDEC PLCC-28 0.6 g	
Electrical		
Input voltage Power consumption (typ)	2.19 to 3.6V 44 mW @ 3V	
Interfaces / IO		
Interfaces Sync Options Protocols Clock drift Output Frequency Built-in-self test	UART, SPI, I <sup>2</sup> C Yes Xbus 10 ppm Up to 1 kHz, 100 Hz SDI Yes	
Software Suite		
GUI (Windows/Linux) SDK (Example code) Drivers Support	MT Manager Firmware updater, Magnetic Field Mapper C++, C#, python, Matlab, Nucleo, public source code LabVIEW, ROS, GO BASE by XSENS: online manuals, community and knowledge base	

3D models available on request

• Available online via Digi-Key, Mouser, Farnell and local distributors



ISO 2015 CERTIFIED

Unless stated otherwise, all specifications are typical. Specifications subject to change without notice.

© Xsens, March 2021