

The SW60P is a miniature series single pole, free standing, compact contactor which is sealed to IP66. The SW60P designed to fill the gap between 30 ampere relays and 100 ampere contactors. Devised for both interrupted and uninterrupted loads, the SW60P is suitable for switching Resistive, Capacitive and Inductive loads. Typical applications include switching small traction motors, hydraulic power packs and small electric winch motors.

Application	Interrupted	Uninterrupted
Thermal Current Rating (I_{th})		80A
Intermittent Current Rating:		
30% Duty		145A
40% Duty		125A
50% Duty		115A
60% Duty		105A
70% Duty		95A
Rated Fault Current Breaking Capacity (I_{cn}) 5ms Time Constant: (in accordance with UL583 ²)		
SW60P		400A at 48V D.C.
SW60BP		400A at 96V D.C.
Rated Fault Current Breaking Capacity (I_{cn}) Resistive Load: (in accordance with UL583 ²)		
SW60P		120A at 60V D.C.
SW60BP		120A at 96V D.C.
Maximum Recommended Contact Voltages (U_e):		
SW60P	48V D.C.	60V D.C.
SW60BP	96V D.C.	
Typical Voltage Drop per pole across New Contacts at 80A	40mV	
Mechanical Durability	>3 x 10 ⁶ Cycles	
Coil Voltage Available (U_s) (Rectifier board required for A.C.)	From 6 to 130V D.C.	
Coil Power Dissipation:		
Highly Intermittent Rated Types	14 - 21 Watts	
Intermittently Rated types	10 - 14 Watts	
Prolonged Rated Types	7 - 10 Watts	
Continuously Rated Types	5 - 7 Watts	
Maximum Pull-In Voltage (Coil at 20° C) Guideline:		
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% U_s	
Intermittently Rated types (Max 70% Duty Cycle)	60% U_s	
Prolonged Operation (Max 90% Duty Cycle)	60% U_s	
Continuously Rated Types (100% Duty Cycle)	66% U_s	
Drop-Out Voltage Range	10 - 25% U_s	
Typical Pull-In Time	15ms	
Typical Drop-Out Time (N/O Contacts to Open):		
Without Suppression	6ms	
With Diode Suppression	35ms	
With Diode and Resistor (Subject to resistance value)	8 - 20ms	
Typical Contact Bounce Period	3ms	
Operating Ambient Temperature	- 40°C to + 60°C	
Guideline Contactor Weight:		
SW60P	210 gms	
With Blowouts	+ 8 gms	
Advised Connection Sizes for Maximum Continuous Current		
Copper busbar	52mm ² [0.08inch ²]	
Cable	Rated suitable for Application	

Key: ▾ = Interrupted ▴ = Uninterrupted

Note: Where applicable values shown are at 20°C

* Please check our web site for product UL status


- Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: technical@albrightinternational.com
- Albright reserve the right to change data without prior notice

- Interrupted** current - opening and closing on load with frequent switching (results in increased contact resistance).
- Uninterrupted** current - no or infrequent load switching requirements (maintains a lower contact resistance).


The SW60P features single pole double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The SW60P incorporates an enclosed top cover and offers environmental protection to IP66. The SW60P has M6 stud main terminals and 6.3mm spade coil connections. It can be mounted via mounting brackets (supplied fitted). Mounting can be on the side or base of the contactor.



SW60P

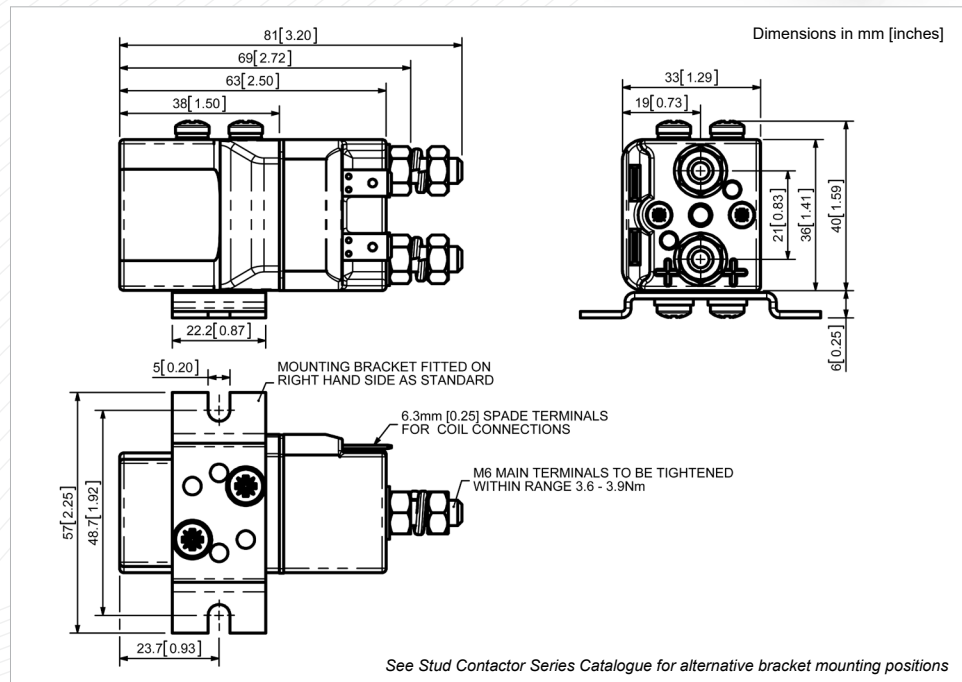

SW60P Contactor Performance

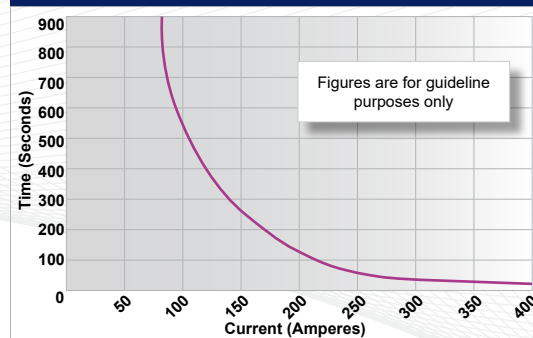

Contact Performance Key:
— Interrupted and Uninterrupted Current

SW60P Available Options

General		Suffix
Auxiliary Contacts	X	
Auxiliary Contacts - V4	X	
Magnetic Blowouts [†]	○	B
Magnetic Blowouts - High Powered [†]	X	
Armature Cap	X	
Mounting Brackets (See Stud Series Catalogue)	●	
Magnetic Latching [†] (Not fail safe)	○	M
Closed Contact Housing	●	
Environmentally Protected IP66	●	P
EE Type (Steel Shroud)	X	
Contacts		
Large Tips	X	
Textured Tips	X	
Silver Plating	X	
Coil		
AC Rectifier Board (Fitted)	X	
Coil Suppression [†]	○	
Flying Leads	X	
Manual Override Operation	X	
M4 Stud Terminals	○	
M5 Terminal Board	X	
Vacuum Impregnation	X	

Key: Optional ○ Standard ● Not Available X
[†] Connections become polarity sensitive

