CE RoHS

## Completely pre-assembled Signal Towers / CleanSIGN CleanSIGN BM Contin. tone 24VDC MC

Part No.: 695.210.55



i

i an 110	070.210.00	
Series:	CleanSIGN	Torinoite Statement
MECHAN	ICAL DATA	
Length		152 mm
Width		112 mm
Height		390 mm
Diameter		77 mm
Materials		PA
Dome colour		Clear
Housing colour		Black
Protection category		IP67 IP69K
Connection		Screw terminals
cross-sectional area maximum		num 1,50mm² / 16AWG
Type of fixing		Base mounting
Working temperature minimum		mum -30°C
Working temperature maximum		imum +50°C
Weight with packaging		559 g
Product weight		419 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		ce +/- 10%
Rated operational voltage		e 24 VDC
Rated operational current		
Rated inrush current		280 mA
Protection class		Protection class 2
Pollution degree		3
OPTICAL	DATA	
Light source		LED
Light colour		MC 3 colours Red
Optical signal image		Permanent
Service life optical		50,000 h maximum
ACUSTIC		
Volume (max) at 1m distance		nce 85,0 dB (A)
Acoustic signal image		Continuous tone
Audio frequency		2400 Hz
Acoustic service life		5,000 h minimum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ


## Completely pre-assembled Signal Towers / CleanSIGN CleanSIGN BM Contin. tone 24VDC MC

APPROVAL DATA			
Conforms with CE	Yes		
WEEE	No		
Conforms with RED directive	No		
Conform with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	No		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with GL	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / CleanSIGN CleanSIGN BM Contin. tone 24VDC MC

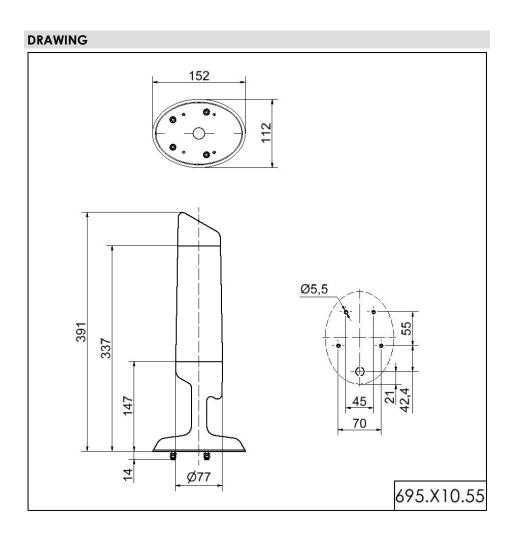

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.