

3V Lithium Coin Cell




Specifications

Item	Values	Conditions	
Nominal Voltage	3V	Standard Discharge	
Nominal Capacity	150mAh		
Instantaneous short-circuit current	≥300mA	Time ≤0.5 second	
Off-load Voltage	≥3.2V	Unit Cell	
Storage Temperature	0-35°C	-	
Standard Weigh	2.5g	Unit Cell	
Service Output	Initial	95 hours	Continuous discharge with load 2kΩ, till 2V end-voltage at 20°C ~ 25°C
	After 12 months storage	93 hours	
Self-discharge Rate	Stored for 12 months at normal temperature, then continuously discharged with 15kΩ load till 2V end-voltage	Less than ≤2%	


Item	Test Methods	Standard	
Dimensions	Using vernier calliper (accuracy ≥ 0.02) while avoiding short-circuit	Diameter	20mm (-0.15mm)
		Height	2.5mm (-0.2mm)
Off-load Voltage	Using multimeter (accuracy ≥0.25%) Internal Resistance ≥1MΩ	≥3.2V	
Instantaneous Short-circuit Current	Time of short-circuit should be less than 0.5 Second and avoid repeated test within half an hour	≥300mA	
Appearance	Eyeballing	Bright, clean, no rust, no leakage, and no flaw	
Capacity	Continuously discharge for 8 hour with load 2kΩ, temperature at 20~25°C, humidity at 65 ±20% till 2V end-voltage (for fresh battery only: within 3 months)	≥95h	
Vibration Test	Put battery on the platform of the vibrations Machine, start the machine and adjust the Frequency form 10 times per minute to 15 Times per minute. keep it running for an hour	Characteristics keep stability	
Leakage at high temperature	Stored under temperature (45°C) for 30 days	Leakage rate ≤0.5%	
Over Discharge Test	After 2V end-voltage, continuously discharged for 5 hours	No leakage allowed	

Discharge Characteristics

With load 2kΩ (CR2025)

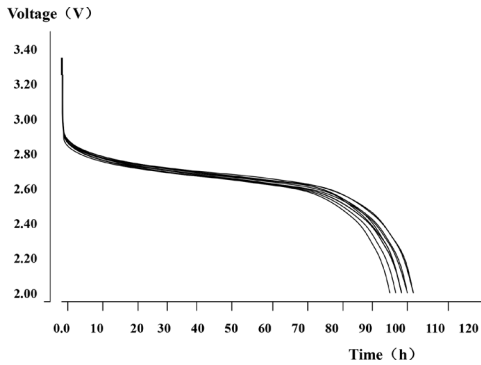

Diagram

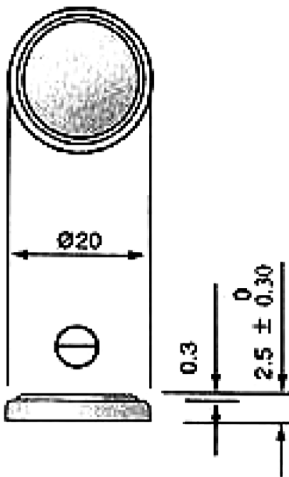

Dimensions : Millimetres

Part Number Table

Description	Part Number
3V Lithium Manganese Dioxide, 150mAh, 20mm	298-0035

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro