

# Band-Master ATS®

## Manual Tools and Bands




### Micro Slim Banding Tool



#### The 601-122 Band-Master ATS® Micro Slim Tool with Counter for use with Micro Slim Bands

Weighs approximately 1.20 lbs., and is designed for Micro Slim .120 (3.05) width clamping bands in a tension range from 60 to 90 lbs. Double wrapped bands will accommodate up to .88 (22.35) inch diameter. Calibrate at 82 lbs  $\pm$  3 lbs. for most shield terminations. Tool and band should never be lubricated.

Color-coded tool handle:



= Micro Slim; Yellow

#### Band-Master ATS® Micro Slim Band Selection

Bands	Length		Part Number		Fits Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
Medium Micro Slim	8.125	206.38	<b>601-600</b>	<b>601-601</b>	.88	22.4
Long Micro Slim	14.25	361.95	<b>601-602</b>	<b>601-603</b>	1.80	45.7

#### Cable Pull Strength for Band-Master ATS® Micro Slim Bands

Name	Material Type	Band Width		Band Thickness		Calibration Setting	Cable Pull Strength
		In	mm	In	mm		
Micro Slim	300 SST Work Hardened/Passivate	0.12w	3.05	.010	0.25	82 $\pm$ 3 lbs	80 lvs

#### Knife and Blade and Replacement / Upgrade Kit

Tool	Replacement Part Number(s)
601-122 Band-Master Micro Slim	601-328 Knife and Blade Kit




## Micro Slim Bands

**Slim bands are better at conforming to irregular platform shapes (elliptical platforms) and individual braid buildup (pig tails)**

### Medium Flat 601-600 Medium Precoiled 601-601

Micro Slim bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Medium Micro Slim bands are 8.00 inches (203.2) in length and designed for use with the Band-Master™ 601-122 hand banding tool or the 601-123 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately .88 inches (22.4).

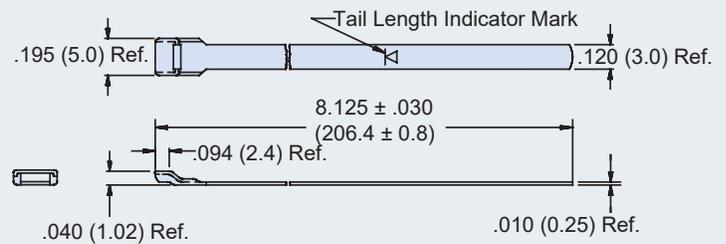

### Long Flat 601-602 Long Precoiled 601-603

Micro Slim bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Long Micro Slim Bands are 14.00 inches (355.6) in length and designed for use with the Band-Master™ 601-122 hand banding tool or the 601-123 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately 1.88 inches (45.7).

