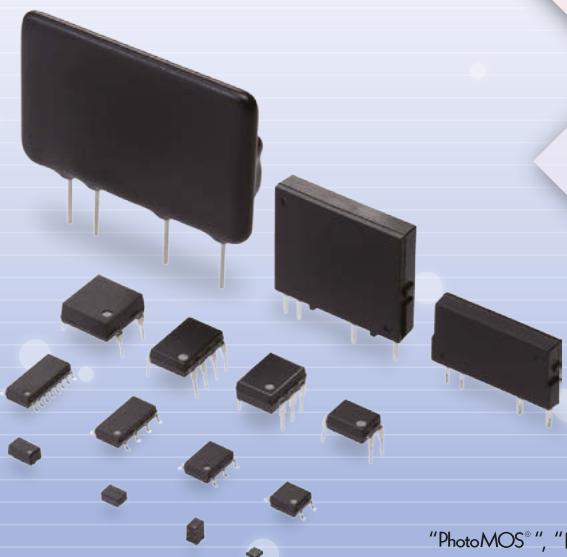


PhotoMOS®

Phototriac Coupler Solid State Relays

◆◆◆ SELECTION GUIDE ◆◆◆



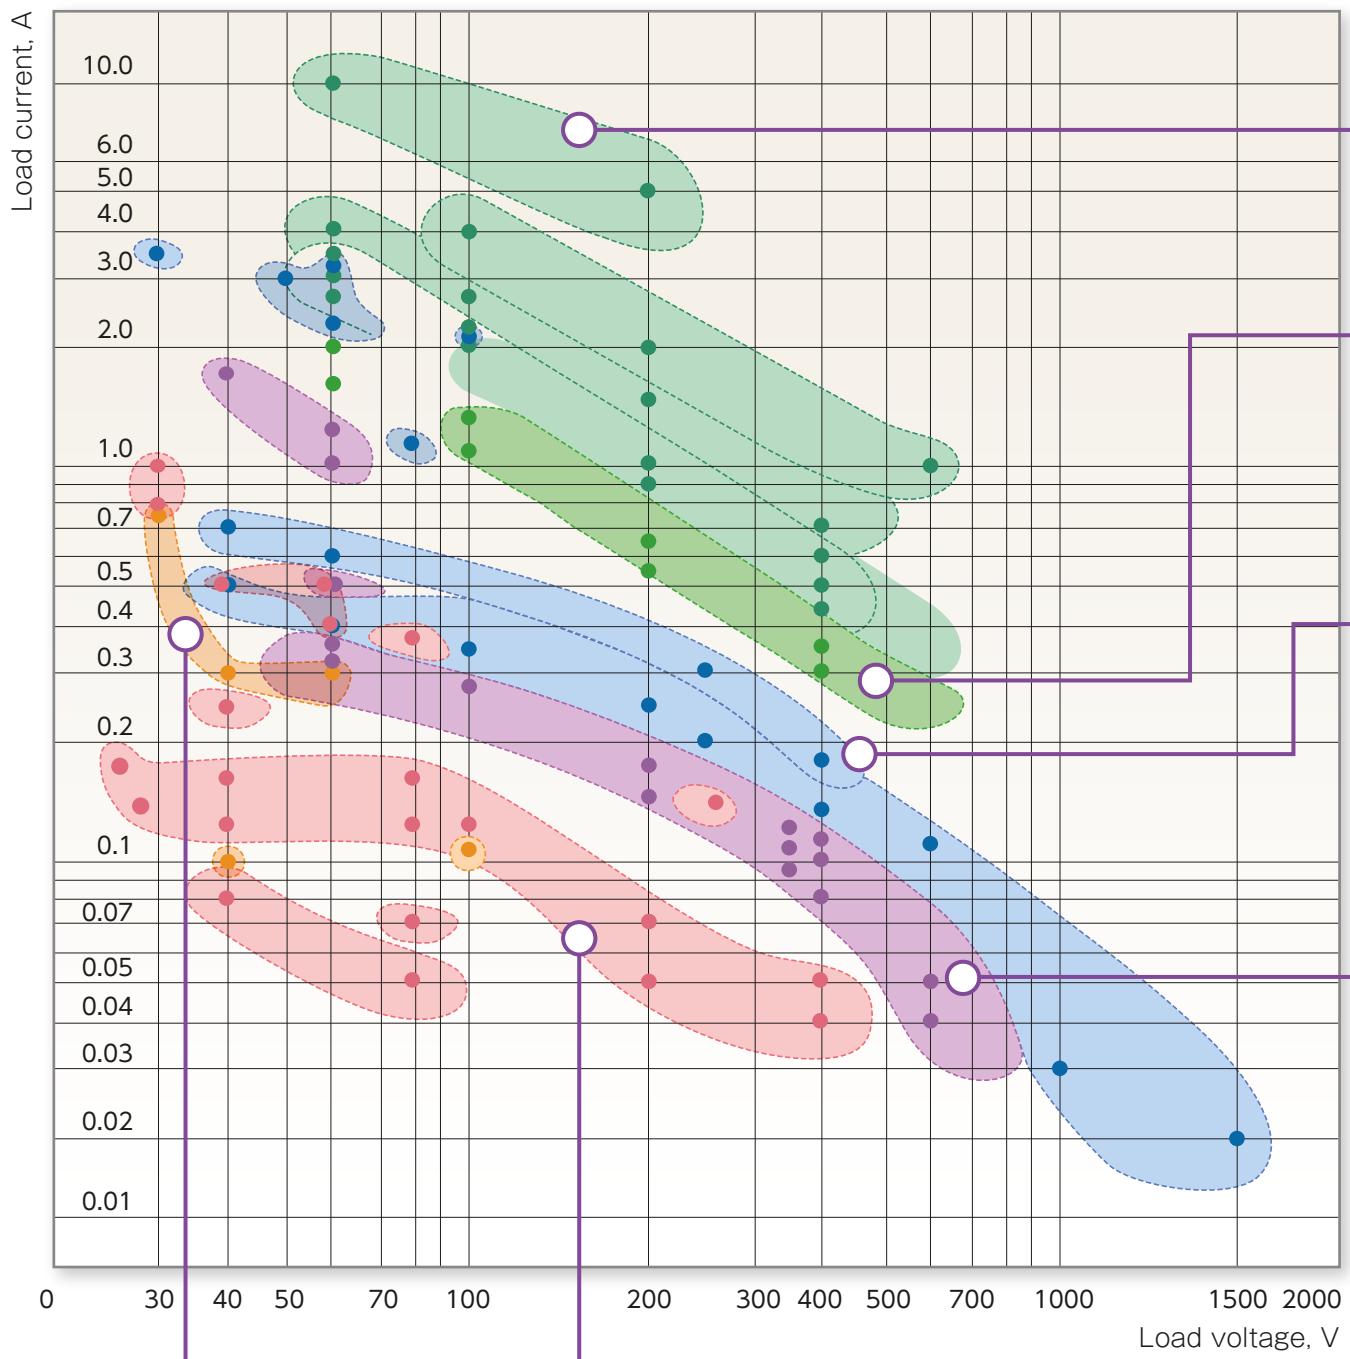
"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.
*Recognized in Japan, the United States, all member states of European Union and other countries.



INDEX

◆ PhotoMOS® Types and typical applications	2
◆ PhotoMOS® Quick Reference.....	4
◆ PhotoMOS® Part No.System	10
◆ PhotoMOS® Selector Chart	11
◆ Photovoltaic MOSFET Drivers Selector Chart	46
◆ Phototriac Coupler Selector Chart	47
◆ Solid State Relays Selector Chart	49
◆ Dimensions	56

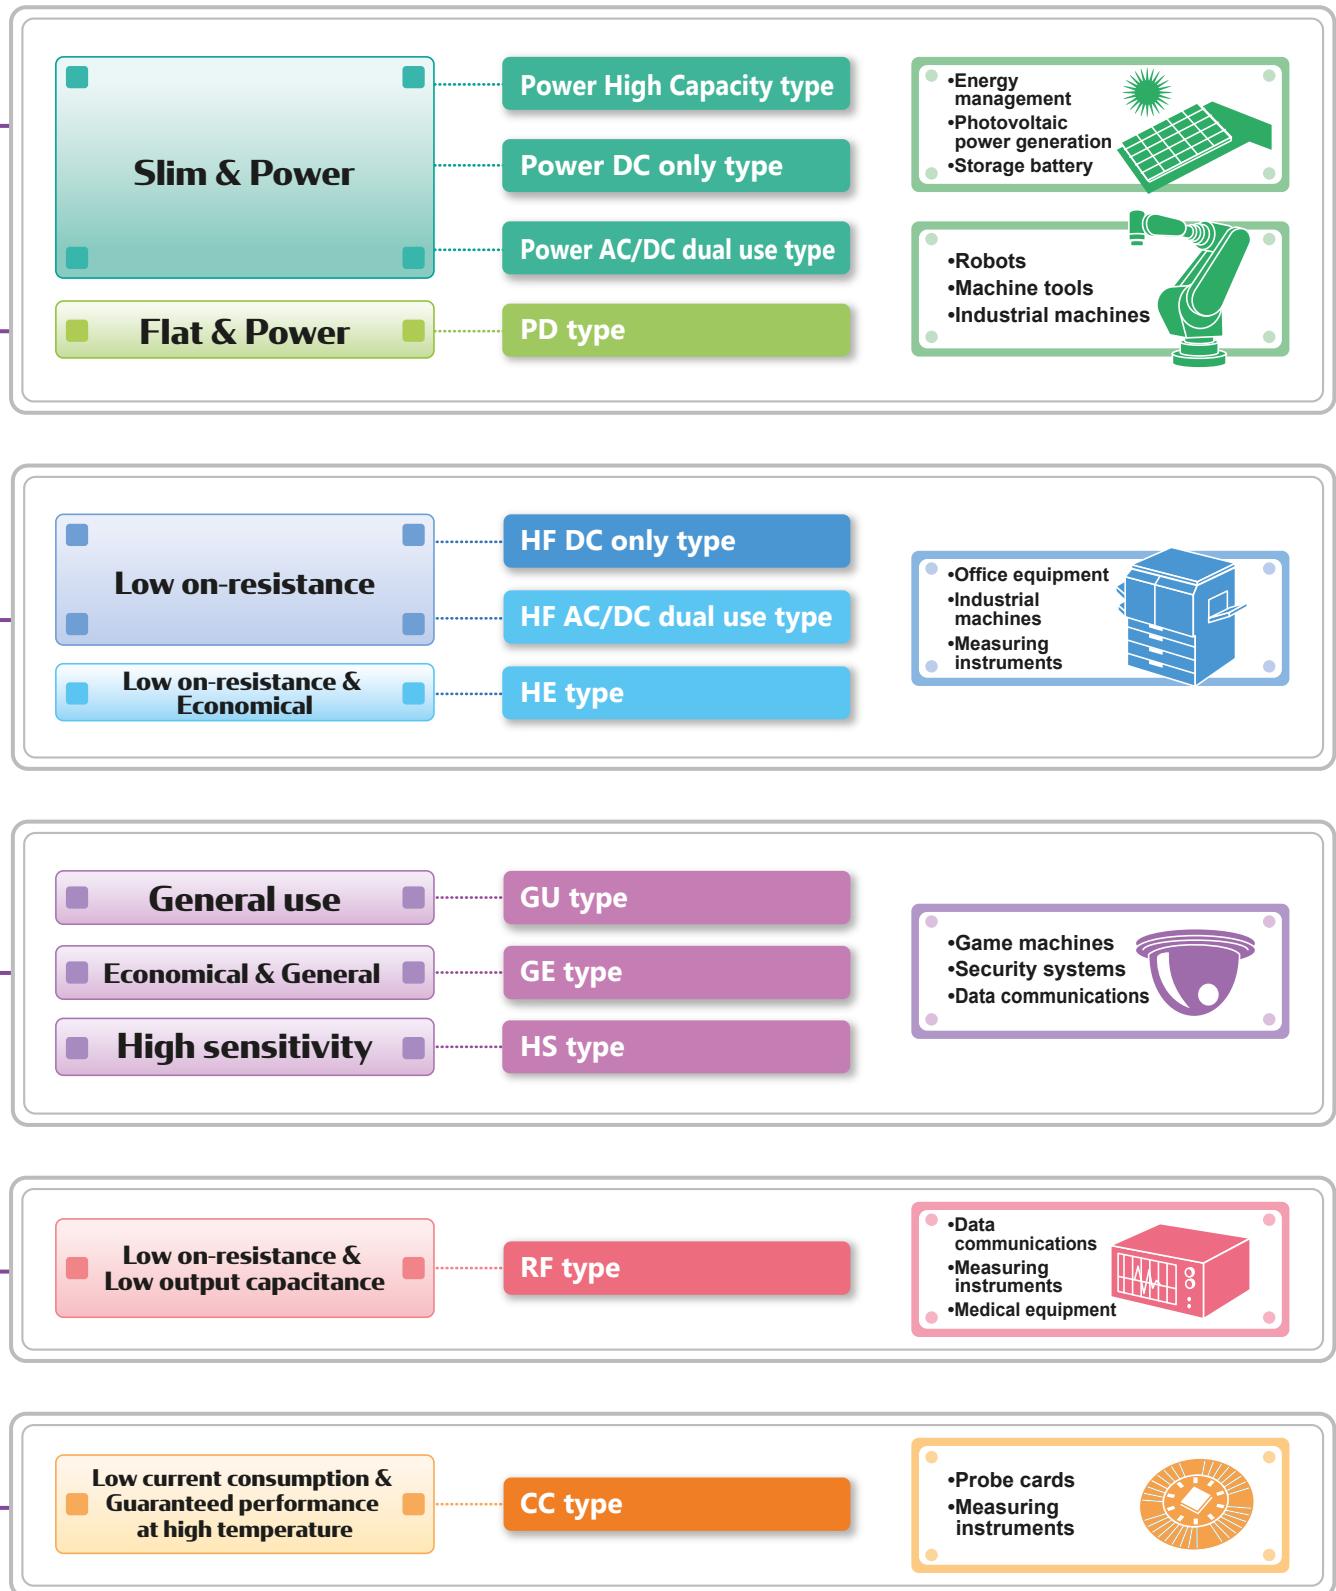
Panasonic's world's leading by offering a great lineup.



*About automotive applications

If you are considering to use PhotoMOS® for automotive applications, please contact your local Panasonic Corporation technical representative.

PhotoMOS® support various core industries



•**PD:** Power DIP

•**HF:** High Functioned

•**HE:** High functioned and Economical

•**RF:** Radio Frequency

•**GU:** General Use

•**GE:** General use and Economical

•**HS:** High Sensitivity

•**CC:** Capacitor Coupled

PhotoMOS® Quick Reference

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package						
				TSon	VSSOP	SON	SSOP	SOP4	SOP6	SOP8
1 Form A	20	0.18	2.8		AQY221N5T		AQY221N5V			
	25	0.15	5.5		AQY221N3T	AQY221N3M	AQY221N3V			
	30	0.75	0.2	AQY2C1R6P						
		0.8	0.18		AQY221R6T					
		1	0.18				AQY221R6V			
		1	0.25							
		3.5	0.035							
	40	0.1	10.5	AQY2C1R3P						
		0.12	9.5		AQY221N2T	AQY221N2M	AQY221N2V/AQY221FN2V	AQY221N2S		
		0.25	0.75~0.8		AQY221R2T	AQY221R2M	AQY221R2V/AQY221FR2V	AQY221R2S		
		0.3	0.8	AQY2C1R2P						
		0.5	0.55				AQY221R4V			
		0.5	0.6							
		0.7	0.3							
		1.6	0.1					AQY211G2S		
	50	3	0.04						AQV252G2S	
	60	0.3	0.9	AQY2C2R2P						
		0.4	0.74~0.8		AQY222R2T		AQY222R2V			
		0.5	0.55							
		0.5	0.8~0.85					AQY212S/AQY222R1S/AQY232S	AQV212S	
		0.55	0.83~0.85							
		0.6	0.37							
		1	0.34					AQY212GS		
		1.1	0.34							
		1.25	0.2					AQY212G2S/AQY212FG2S		
		2	0.11							
		2.5	0.08							
		2.7	0.066							
		3	0.11							
		3.3	0.033					AQV252G3S		
	80	3.5	0.033							
		3.6	0.033							
		4	0.05							
		6	0.015							
		10	0.008							
		0.12	10.5				AQY225R2V			
		0.15	10.5					AQY225R2S		
		0.35	0.8					AQY225R1S		
		1.25	0.09						AQV255GS	

* DC load type

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package					
				SOP16	DIP4	DIP6	DIP8	PowerDIP4	SIL4
1 Form A	20	0.18	2.8						
	25	0.15	5.5						
	30	0.75	0.2						
		0.8	0.18						
		1	0.18						
		1	0.25	AQY211EH					
		3.5	0.035			AQV251G			
	40	0.1	10.5						
		0.12	9.5						
		0.25	0.75~0.8						
		0.3	0.8						
		0.5	0.55						
		0.5	0.6			AQV251 AQV201			
		0.7	0.3			AQV101*			
		1.6	0.1						
	50	3	0.04						
	60	0.3	0.9						
		0.4	0.74~0.8			AQV252 AQV202			
		0.5	0.55			AQV112KL*			
		0.5	0.8~0.85						
		0.55	0.83~0.85	AQY212EH	AQV212				
		0.6	0.37			AQV102*			
		1	0.34						
		1.1	0.34	AQY212GH					
		1.25	0.2						
		2	0.11				AQY272		
		2.5	0.08		AQV252G				
		2.7	0.066					AQZ202D	
		3	0.11					AQZ202	
		3.3	0.033						
		3.5	0.033			AQV252G3			
		3.6	0.033					AQZ102D*	
		4	0.05					AQZ102*	
		6	0.015					AQZ202G	
		10	0.008					AQZ192*	
	80	0.12	10.5						
		0.15	10.5						
		0.35	0.8						
		1.25	0.09						

PhotoMOS® Quick Reference

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package						
				TSON	VSSOP	SON	SSOP	SOP4	SOP6	SOP8
1 Form A	100	0.12	8.8~9	AQY2C5R3P	AQY225R3T		AQY225R3V			
		0.3	2.3						AQV215S	
		0.32	2.3							
		0.35	1.8							
		1.3	0.23							
		1.8	0.18							
		2	0.23							
		2.2	0.07						AQY255G3S	
		2.3	0.09							
		2.4	0.07							
		2.6	0.081							
		4	0.035							
	200	0.05	30						AQV227NS	
		0.07	30							
		0.16	11						AQV217S	
		0.18	11							
		0.25	2.6							
		0.4	1.8					AQY217GS		
		0.65	0.7							
		0.9	0.64							
		1	0.7							
		1.1	0.33							
		1.3	0.34							
		2	0.18							
		5	0.031							
	250	0.2	5.5							
		0.3	2.7							
	350	0.12	17~20					AQY210S AQY210LS AQY230S		
		0.12	23~23.5					AQY210KS	AQV210S	
		0.13	18~23							
	400	0.04	70						AQV224NS	
		0.05	70							
		0.1	25~30					AQY214S AQY234S	AQV214S	
		0.12	26~30							
		0.15	12.4							
		0.18	6.3							
		0.35	2.1							
		0.45	2.4							
		0.5	2.1							
		0.6	1.23							
		0.7	1.06							
	600	0.04	70						AQV216S	
		0.05	52							
		0.05	70							
		0.13	20							
		1	0.52							
	1000	0.03	85							
	1500	0.02	315~345							

* DC load type

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package					
				SOP16	DIP4	DIP6	DIP8	PowerDIP4	SIL4
1 Form A	100	0.12	8.8~9						
		0.3	2.3						
		0.32	2.3			AQV215			
		0.35	1.8			AQV255			
		1.3	0.23					AQY275	
		1.8	0.18						AQZ205D
		2	0.23						AQZ205
		2.2	0.07						
		2.3	0.09						AQZ105D*
		2.4	0.07			AQV255G3			
		2.6	0.081						AQZ105*
		4	0.035						AQZ205G
		0.05	30						
	200	0.07	30			AQV227N			
		0.16	11						
		0.18	11			AQV217			
		0.25	2.6			AQV257			
		0.4	1.8						
		0.65	0.7					AQY277	
		0.9	0.64						AQZ207D
		1	0.7						AQZ207
		1.1	0.33						AQZ107D*
		1.3	0.34						AQZ107*
		2	0.18						AQZ207G
		5	0.031						AQZ197*
	250	0.2	5.5			AQV253 AQV253H AQV203			
		0.3	2.7			AQV103*			
1 Form B	350	0.12	17~20		AQY210HL				
		0.12	23~23.5						
		0.13	18~23		AQY210EH	AQV210 AQV210EH			
	400	0.04	70						
		0.05	70			AQV224N			
		0.1	25~30						
		0.12	26~30		AQY214EH	AQV214 AQV214EH AQV214H AQV234			
		0.15	12.4			AQV204 AQV254 AQV254H			
		0.18	6.3			AQV104*			
		0.35	2.1					AQY274	
		0.45	2.4						AQZ204D
		0.5	2.1						AQZ204
		0.6	1.23						AQZ104D*
		0.7	1.06						AQZ104*
2 Form A	600	0.04	70						
		0.05	52		AQY216EH				
		0.05	70			AQV216			
		0.13	20			AQV256H			
		1	0.52						AQZ206G2
	1000	0.03	85			AQV259			
	1500	0.02	315~345			AQV258 AQV258H5			

PhotoMOS® Quick Reference

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package						
				TSON	VSSOP	SON	SSOP	SOP4	SOP6	SOP8
2 Form A	60	0.4	0.83							AQW212S
		0.5	0.83							
	100	0.3	2.3							
	200	0.04	30							AQW227NS
		0.05	30							
		0.16	11							
	250	0.14	11							AQW223R2S
	350	0.1	16							AQW210S
		0.12	18~23							
	400	0.04	70							
		0.08	30							AQW214S
		0.1	26~30							
		0.12	10.2							
	600	0.04	52							
		0.04	70							
4 Form A	40	0.06	9.5							
		0.16	0.75~0.8							
	80	0.07	10.5							
1 Form B	60	0.5	1							AQY412S
		0.55	1							
	250	0.2	5.5							
	350	0.12	18							AQY410S
		0.13	18							
	400	0.1	26							AQY414S
		0.12	25.2~26							AQV414S
		0.15	11							
		0.5	2.8							
2 Form B	400	0.08	26							AQW414S
		0.1	26							
		0.12	11							
1 Form A & 1 Form B	60	0.45	1							AQW612S
		0.5	1							
	350	0.1	18							AQW610S
		0.12	18							
	400	0.1	26~27							
		0.12	11							

* DC load type

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package					
				SOP16	DIP4	DIP6	DIP8	PowerDIP4	SIL4
2 Form A	60	0.4	0.83						
		0.5	0.83				AQW212 AQW212EH		
	100	0.3	2.3				AQW215		
	200	0.04	30						
		0.05	30				AQW227N		
		0.16	11				AQW217		
	250	0.14	11						
	350	0.1	16						
		0.12	18~23				AQW210 AQW210EH		
	400	0.04	70				AQW224N		
		0.08	30						
		0.1	26~30				AQW214 AQW214EH		
		0.12	10.2				AQW254		
	600	0.04	52				AQW216EH		
		0.04	70				AQW216		
4 Form A	40	0.06	9.5	AQS221N2S AQS221FN2S					
		0.16	0.75~0.8	AQS221R2S AQS221FR2S					
	80	0.07	10.5	AQS225R2S					
1 Form B	60	0.5	1						
		0.55	1		AQY412EH	AQV412EH			
	250	0.2	5.5				AQV453		
	350	0.12	18						
		0.13	18		AQY410EH	AQV410EH			
	400	0.1	26						
		0.12	25.2~26		AQY414EH	AQV414 AQV414EH			
		0.15	11				AQV454 AQV454H		
		0.5	2.8						AQZ404
2 Form B	400	0.08	26						
		0.1	26				AQW414 AQW414EH		
		0.12	11				AQW454		
1 Form A & 1 Form B	60	0.45	1						
		0.5	1				AQW612EH		
	350	0.1	18						
		0.12	18				AQW610EH		
	400	0.1	26~27				AQW614 AQW614EH		
		0.12	11				AQW654		

Channel configuration

- S** : 4 channels (16-pin)
- Y** : 1 channels (4-pin)
- V** : 1 channels (6-pin)
- Z** : 1 channels (SIL4-pin)
- W** : 2 channels (8-pin)

Output configuration

- 1** : 1 Form A (DC)
- 4** : 1 Form B (AC/DC)
2 Form B (AC/DC)
- 2** : 1 Form A (AC/DC)
2 Form A (AC/DC)
- 6** : 1 Form A & 1 Form B (AC/DC)

A = Normally open B = Normally closed

AQ Y 2 2 1 F E H L V Y

Driving method

- Nil** : Current-sensitive
- F** : Small size type voltage-sensitive
(Recommend input voltage: 5V)
- D** : Power type voltage-sensitive

Feature

- Nil** : Standard
- N** : Low C × R
- E** : Economical
- R** : Low C × R
- G** : High capacity

I/O isolation voltage

- Nil** : Basic insulation (200V, 500V, 1500V, 2500V, 3000V)
- H** : Reinforced insulation (5000V)

Valid only for combinations of products listed in the catalog
(see "TYPES" in this catalog).
Please inquire regarding combinations not listed in this catalog.

Type

- 0** : HF type Low on-resistance
Power type Slim and power
- 5** : HE type Low on-resistance & Economical
- 1** : GU type Wide variation
GE type General use and Economical
- 6** : **9** : Power High Capacity type Slim and power
- 2** : RF type Low on-resistance and low output capacitance
- 7** : PD type Flat and power
- 3** : HS type High sensitivity
- C** : CC type Capacitor coupled isolation type

Load voltage

- | | | | | | |
|----------|--------------|----------|---------------|----------|---------|
| 0 | : 350V | 4 | : 400V | 8 | : 1500V |
| 1 | : to 40V | 5 | : 80V to 100V | 9 | : 1000V |
| 2 | : 50V to 60V | 6 | : 600V | | |
| 3 | : 250V | 7 | : 200V | | |

Current limit function

- Nil** : Non
- KL** : With short circuit protection (non-latching)
- K** : With short circuit protection (latching)
- L** : With current limiting

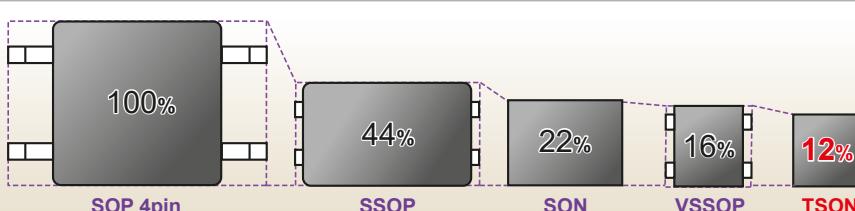
Package

- | | | | | | |
|------------|--------------------------------|----------|---------|----------|--------|
| Nil | : DIP (through hole terminal) | S | : SOP | P | : TSON |
| A | : DIP (surface mount terminal) | T | : VSSOP | | |
| M | : SON | V | : SSOP | | |

Packing style

- Nil** : Tube
- Y** : Tape and reel (SSOP/SON/VSSOP)
- X** : Tape and reel (DIP/SOP)
- W** : Tape and reel (SSOP/SON/VSSOP)
- Z** : Tape and reel (DIP/SOP)



! Package size



PhotoMOS® Selector Chart

GU General use & wide variation




GU **GE** **CC** **RF** **HE** **HF** **HS** **PD** Power

Product name		GU SOP														
Contact configuration		1 Form A			1 Form A											
Number of terminals		4pin			6pin											
Appearance configuration *Standoff height included																
		mm														
Features		Miniature SOP4-pin type of 60V/350V/400V load voltage			Miniature SOP6-pin type of 60 to 600V load voltage											
Part No.		AQY212S	AQY210S	AQY214S	AQV212S	AQV215S	AQV217S	AQV210S	AQV214S	AQV216S						
Output	Load voltage	AC/DC			AC/DC											
		Peak AC	60V	350V	400V	60V	100V	200V	350V	400V	600V					
		DC	60V	350V	400V	60V	100V	200V	350V	400V	600V					
	1A															
	Continuous load current *6-pin type: in case of A connection		0.5A	0.5A	0.12A	0.1A	0.5A	0.3A	0.16A	0.12A	0.1A	0.04A				
	Peak load current		1.5A	0.3A	0.24A	1.5A	0.9A	0.48A	0.3A	0.3A	0.12A					
	Power dissipation		300mW			450mW										
	On resistance *6-pin type: in case of A connection	Typ.	0.83Ω	17Ω	25Ω	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω					
		Max.	2.5 Ω	25Ω	35Ω	2.5 Ω	4.0Ω	15Ω	35Ω	50Ω	120Ω					
	Output capacitance (Typ.)		80pF	45pF		80pF	110pF	70pF	45pF							
	Off state leakage current (Max.)		1μA			1μA										
Input	LED forward current		50mA			50mA										
	LED reverse voltage		5V			5V										
	Peak forward current		1A			1A										
	Power dissipation		75mW			75mW										
	LED operate current	Typ.	0.9 mA			0.7 mA										
		Max.	3 mA			3 mA										
	LED turn off current	Min.	0.4 mA			0.4 mA										
		Typ.	0.85mA			0.65mA										
Turn on time	Typ.	1.25V (1.14V at If = 5mA)			1.25V (1.14V at If = 5mA)											
		Max.	1.5V			1.5V										
Turn off time	Typ.	0.08ms	0.04ms		0.08ms	0.06ms	0.05ms			0.04ms						
	Max.	0.2 ms	0.2 ms		0.2 ms	0.2 ms	0.2 ms			0.2 ms						
Total power dissipation		350mW			500mW											
I/O isolation voltage		1,500Vrms			1,500Vrms											
I/O capacitance	Typ.	—			0.8pF											
	Max.	1.5pF			1.5pF											
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ											
Safety standards		UL/C-UL, BSI			UL/C-UL											
Mass (weight) (approx.)		0.084g			0.125g											


PhotoMOS® Selector Chart

GU General use & wide variation

GU GE CC RF HE HF HS PD Power

Product name		GU SOP High Capacity			GU SOP High Capacity Voltage-sensitive	GU High Capacity
Contact configuration		1 Form A			1 Form A	1 Form A
Number of terminals		4pin			4pin	4pin
Appearance configuration *Standoff height included						
mm						
Features		Miniature SOP4-pin type with high capacity up to 1.6A			Space-saving SOP4-pin high capacity type with built-in input register	4-pin high capacity of 1.1A, I/O isolation voltage of 5,000V
Part No.		AQY211G2S	AQY212G2S	AQY212GS	AQY217GS	AQY212FG2S
Output	Load voltage	AC/DC				AC/DC
		Peak AC	40V	60V	200V	60V
		DC	40V	60V	200V	60V
	Continuous load current	1.6A	1.25A	1A	0.4A	1.25A
		1.5A				1.1A
		1A				
		0.5A				
	Peak load current		4.0A	3.0A	1.2A	3.0A
	Power dissipation		400mW			400mW
Input	On resistance	Typ.	0.1 Ω	0.2Ω	0.34Ω	1.8Ω
		Max.	0.15Ω	0.5Ω	0.7 Ω	2.5Ω
	Output capacitance (Typ.)		180pF	150pF	220pF	85pF
	Off state leakage current (Max.)		1μA			1μA
	LED forward current		50mA			50mA
	LED reverse voltage		5V			5V
	Peak forward current		1A			—
	Power dissipation		75mW			65mW
Turn on time	LED operate current	Typ.	0.9mA	1.1mA	0.75mA	Operate voltage: 1.4V
		Max.	3 mA	3 mA	3 mA	Operate voltage: 4 V
	LED turn off current	Min.	0.2mA	0.3mA	0.2 mA	Turn off voltage: 0.8V
		Typ.	0.8mA	1 mA	0.7 mA	Turn off voltage: 1.4V
	LED dropout voltage	Typ.	1.32V (1.14V at If = 5mA)			Input current: 8.5mA
		Max.	1.5V			(VIN = 5V)
Turn off time	Typ.	1 ms	1.3ms	1.2 ms	0.7ms	1.3ms
	Max.	3 ms	5 ms	5 ms	5 ms	5 ms
Total power dissipation	Typ.	0.12ms	0.1ms	0.03ms	0.1ms	0.1ms
	Max.	0.5 ms	0.5ms	0.2 ms	0.5ms	0.5ms
I/O isolation voltage		450mW			450mW	550mW
I/O capacitance		1,500Vrms			500Vrms	5,000Vrms
Initial I/O isolation resistance (Min.)		0.8pF			0.8pF	0.8pF
Safety standards		UL/C-UL, VDE		UL/C-UL	UL/C-UL, VDE	UL/C-UL, VDE
Mass (weight) (approx.)		0.084g			0.084g	0.19g



GU General use & wide variation**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** Power

Product name		GU								
Contact configuration		1 Form A								
Number of terminals		6pin								
Appearance configuration *Standoff height included										
mm										
Features		6-pin type for switching low-level analog signal								
Part No.			AQV212	AQV215	AQV217	AQV210	AQV214	AQV216	AQV214H	
Output	Load voltage			AC/DC						
		Peak AC		60V	100V	200V	350V	400V	600V	400V
		DC		60V	100V	200V	350V	400V	600V	400V
	Continuous load current *6-pin type: in case of A connection		1A							
	0.5A		0.55A							
	Peak load current		0.32A							
	Power dissipation		500mW							
	On resistance *6-pin type: in case of A connection	Typ.	0.83Ω							
		Max.	2.5 Ω							
Input	Output capacitance (Typ.)		80pF							
	Off state leakage current (Max.)		1μA							
	LED forward current		50mA							
	LED reverse voltage		5V							
	Peak forward current		1A							
	Power dissipation		75mW							
	LED operate current	Typ.	1 mA							
		Max.	3 mA							
	LED turn off current	Min.	0.4 mA							
		Typ.	0.79mA							
	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)							
		Max.	1.5V							
Turn on time		Typ.	0.65ms	0.60ms	0.25ms	0.25ms	0.21ms	0.28ms	0.6 ms	
		Max.	2 ms	2 ms	1 ms	0.5 ms	0.5 ms	0.5 ms	0.8 ms	
Turn off time		Typ.	0.08ms	0.06ms	0.05ms	0.05ms	0.05ms	0.04ms	0.05ms	
		Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	
Total power dissipation		550mW								
I/O isolation voltage		1,500Vrms							5,000Vrms	
I/O capacitance		Typ.	0.8pF							
		Max.	1.5pF							
Initial I/O isolation resistance (Min.)		1,000MΩ								
Safety standards		UL/C-UL							UL/C-UL, BSI	
Mass (weight) (approx.)		0.453g								

PhotoMOS® Selector Chart




GU General use & wide variation

GU **GE** **CC** **RF** **HE** **HF** **HS** **PD** Power

Product name		GU SOP			GU												
Contact configuration		2 Form A			2 Form A												
Number of terminals		8pin			8pin												
Appearance configuration *Standoff height included																	
mm																	
Features		Miniature SOP8-pin type of 60V/350V/400V load voltage			Compact DIP8-pin type of 60V to 600V load voltage												
Part No.		AQW212S	AQW210S	AQW214S	AQW212	AQW215	AQW217	AQW210	AQW214	AQW216							
Output	Load voltage	AC/DC			AC/DC												
		Peak AC	60V	350V	400V	60V	100V	200V	350V	400V	600V						
		DC	60V	350V	400V	60V	100V	200V	350V	400V	600V						
	1A																
	0.5A		0.4A	0.1A	0.08A	0.5A	0.3A	0.16A	0.12A	0.1A	0.04A						
	Continuous load current																
	0.5A																
	Peak load current		1.5A	0.3A	0.24A	1.5Ω	0.9A	0.48A	0.36A	0.3A	0.12A						
	Power dissipation		600mW			800mW											
	On resistance	Typ.	0.83Ω	16Ω	30Ω	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω						
		Max.	2.5 Ω	35Ω	50Ω	2.5 Ω	4 Ω	15Ω	35Ω	50Ω	120Ω						
Output capacitance (Typ.)		80pF			45pF	80pF	110pF	70pF	45pF								
Off state leakage current (Max.)		1μA			1μA												
Input	LED forward current		50mA			50mA											
	LED reverse voltage		5V			5V											
	Peak forward current		1A			1A											
	Power dissipation		75mW			75mW											
	LED operate current	Typ.	0.9mA			0.9mA											
		Max.	3 mA			3 mA											
	LED turn off current	Min.	0.4mA			0.4mA											
		Typ.	0.8mA			0.8mA											
	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)			1.25V (1.14V at If = 5mA)											
		Max.	1.5V			1.5V											
Turn on time	Typ.	0.65ms	0.23ms	0.21ms	0.65ms	0.60ms	0.25ms	0.25ms	0.31ms	0.28ms							
	Max.	2 ms	0.5 ms	0.5 ms	2 ms	2 ms	1.0 ms	0.5 ms	0.5 ms	0.5 ms							
Turn off time	Typ.	0.08ms	0.04ms		0.08ms	0.06ms	0.05ms				0.04ms						
	Max.	0.2 ms	0.2 ms		0.2 ms	0.2 ms	0.2 ms				0.2 ms						
Total power dissipation		650mW			850mW												
I/O isolation voltage		1,500Vrms			1,500Vrms												
I/O capacitance	Typ.	0.8pF			0.8pF												
	Max.	1.5pF			1.5pF												
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ												
Safety standards		UL/C-UL, BSI			UL/C-UL												
Mass (weight) (approx.)		0.195g			0.5g												

GU General use & wide variation



GU GE CC RF HE HF HS PD Power

Product name		GU SOP			GU		
Contact configuration		1 Form B		1 Form B	1 Form B		
Number of terminals		4pin		6pin	6pin		
Appearance configuration *Standoff height included							
mm							
Features		Normally closed SOP4-pin type of 60V/350V/400V load voltage			Normally closed 6-pin type of 400V load voltage		
Part No.		AQY412S	AQY410S	AQY414S	AQV414		
Output	Load voltage	AC/DC			AC/DC		
		Peak AC	60V	350V	400V		
		DC	60V	350V	400V		
	Continuous load current *6-pin type: in case of A connection		1A				
	0.5A		0.5A	0.12A	0.1A		
	Peak load current		1.5A	0.3A	0.24A		
	Power dissipation		300mW		450mW		
	On resistance *6-pin type: in case of A connection	Typ.	1Ω	18Ω	26Ω		
		Max.	2.5Ω	25Ω	35Ω		
	Output capacitance (Typ.)		500pF	110pF	100pF		
Input	Off state leakage current (Max.)		1μA				
	LED forward current		50mA				
	LED reverse voltage		5V				
	Peak forward current		1A				
	Power dissipation		75mW				
	LED operate current	Typ.	0.9 mA				
		Max.	3 mA				
	LED turn off current	Min.	0.4 mA				
		Typ.	0.85mA				
	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)				
		Max.	1.5V				
Turn on time		Typ.	0.9 ms	0.52ms	0.47ms		
		Max.	3 ms	1 ms	1 ms		
Turn off time		Typ.	0.21ms	0.23ms	0.28ms		
		Max.	1 ms	1 ms	1 ms		
Total power dissipation		350mW			500mW		
I/O isolation voltage		1,500Vrms			1,500Vrms		
I/O capacitance	Typ.	0.8pF			0.8pF		
	Max.	1.5pF			1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ		
Safety standards		UL/C-UL, VDE	UL/C-UL, BSI		UL/C-UL		
Mass (weight) (approx.)		0.084g			0.125g		
					0.453g		





PhotoMOS® Selector Chart

GU General use & wide variation

GU **GE** **CC** **RF** **HE** **HF** **HS** **PD** Power

Product name		GU SOP	GU	GU SOP		
Contact configuration		2 Form B	2 Form B	1 Form A & 1 Form B		
Number of terminals		8pin	8pin	8pin		
Appearance configuration *Standoff height included						
mm						
Features		Normally closed SOP8-pin type of 400V load voltage	Normally closed DIP8-pin type of 400V load voltage	Both N.O. and N.C. contacts incorporated in a small SOP8-pin package		
Part No.		AQW414S	AQW414	AQW612S	AQW610S	
Output	Load voltage	AC/DC	AC/DC	AC/DC		
		Peak AC	400V	60V	350V	
		DC	400V	60V	350V	
	1A					
	0.5A					
	0.08A		0.1A	0.45A	0.1A	
	Peak load current		0.24A	0.3A	1.5A	
	Power dissipation		600mW	800mW	600mW	
	On resistance	Typ.	26Ω	26Ω	1 Ω	
		Max.	50Ω	50Ω	2.5Ω	
Output capacitance (Typ.)		100pF	100pF	80pF (N.O.) , 500pF (N.C.)	45pF (N.O.) , 100pF (N.C.)	
Off state leakage current (Max.)		1μA	1μA	1μA		
Input	LED forward current		50mA	50mA		
	LED reverse voltage		5V	5V		
	Peak forward current		1A	1A		
	Power dissipation		75mW	75mW		
	LED operate current	Typ.	0.9mA	0.7 mA		
		Max.	3 mA	3 mA		
	LED turn off current	Min.	0.4mA	0.4 mA		
		Typ.	0.8mA	0.64mA		
	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)	1.25V (1.14V at If = 5mA)		
		Max.	1.5V	1.5V		
Turn on time		Typ.	0.43ms	0.46ms	0.65ms (N.O.) , 0.9ms (N.C.)	
		Max.	1 ms	1 ms	3ms	
Turn off time		Typ.	0.3 ms	0.40ms	0.08ms (N.O.) , 0.2ms (N.C.)	
		Max.	1 ms	1 ms	0.04ms (N.O.) , 0.23ms (N.C.)	
Total power dissipation		650mW	850mW	650mW		
I/O isolation voltage		1,500Vrms	1,500Vrms	1,500Vrms		
I/O capacitance	Typ.	0.8pF	0.8pF	0.8pF		
	Max.	1.5pF	1.5pF	1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ	1,000MΩ		
Safety standards		UL/C-UL, BSI	UL/C-UL	UL/C-UL, VDE	UL/C-UL, BSI	
Mass (weight) (approx.)		0.195g	0.5g	0.195g		



GU General use & wide variation**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** Power

Product name		GU	GU SOP Short Circuit Protection (Latch type)	GU Short Circuit Protection (Non-latch type)
Contact configuration		1 Form A & 1 Form B	1 Form A	1 Form A
Number of terminals		8pin	4pin	6pin
Appearance configuration *Standoff height included		 		
Features		Both N.O. and N.C. contacts incorporated in a DIP8-pin package	Small SOP4-pin type with short circuit protecting (Latch type)	Short circuit protection (Non-latch type) only for DC load
Part No.		AQW614	AQY210KS	AQV112KL
Output	Load voltage	AC/DC	AC/DC	DC
		Peak AC	400V	350V
		DC	400V	350V
	Continuous load current *6-pin type: in case of A connection	1A		
		0.5A	0.1A	0.12A
	Peak load current	0.3A	0.2A (Cut off current [Typ.])	—
	Power dissipation	800mW	400mW	500mW
	On resistance *6-pin type: in case of A connection	Typ.	27Ω	23.5Ω
Input		Max.	50Ω	35 Ω
Output capacitance (Typ.)		45pF (N.O.) , 100pF (N.C.)	42pF	
Off state leakage current (Max.)		1μA	1μA	
LED forward current		50mA	50mA	
LED reverse voltage		5V	5V	
Peak forward current		1A	1A	
Power dissipation		75mW	75mW	
LED operate current	Typ.	0.9mA	1.1mA	
Turn on time		Max.	3 mA	10 mA
LED turn off current		Min.	0.4mA	
Typ.	0.8mA	1 mA		
LED dropout voltage		Typ.	1.25V (1.14V at If = 5mA)	
		Max.	1.5V	1.17V (1.35V at If = 50mA)
Total power dissipation		0.28ms (N.O.) , 0.43ms (N.C.)	0.7 ms	
	I/O isolation voltage		1ms	2.0 ms
	Turn off time		0.04ms (N.O.) , 0.3ms (N.C.)	0.07ms
	Initial I/O isolation resistance (Min.)		1ms	1 ms
Safety standards		UL/C-UL	UL/C-UL, BSI	UL/C-UL, VDE
Mass (weight) (approx.)		0.5g	0.084g	0.453g

PhotoMOS® Selector Chart


GU General use & wide variation

GU **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU SOP Current Limiting	GU Current Limiting	
Contact configuration		1 Form A	1 Form A	
Number of terminals		4pin	4pin	
Appearance configuration *Standoff height included				
mm				
Features		Miniature SOP4-pin type with current limiting	DIP4-pin type with current limiting and reinforced insulation	
Part No.		AQY210LS	AQY210HL	
Output	Load voltage	AC/DC	AC/DC	
		Peak AC	350V	
		DC	350V	
	Continuous load current	1A		
		0.5A		
		0.12A	0.12A	
	Peak load current		0.18A (Output Limit Current [Typ.])	
	Power dissipation		400mW	
	On resistance	Typ.	20Ω	
		Max.	25Ω	
Input	Output capacitance (Typ.)		45pF	
	Off state leakage current (Max.)		1μA	
	LED forward current		50mA	
	LED reverse voltage		5V	
	Peak forward current		1A	
	Power dissipation		75mW	
	LED operate current	Typ.	1.2mA	
		Max.	3 mA	
	LED turn off current	Min.	0.4mA	
		Typ.	1.1mA	
	LED dropout voltage	Typ.	1.25V (1.14V at IF = 5mA)	
		Max.	1.5V	
	Turn on time	Typ.	0.5 ms	
		Max.	2 ms	
	Turn off time	Typ.	0.08ms	
		Max.	1 ms	
	Total power dissipation		450mW	
	I/O isolation voltage		1,500Vrms	
	I/O capacitance	Typ.	0.8pF	
		Max.	1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ	
Safety standards		UL/C-UL, BSI		
Mass (weight) (approx.)		0.084g	0.19g	

GE General use and Economical


GU GE CC RF HE HF HS PD Power

Product name		GE							
Contact configuration		1 Form A							
Number of terminals		4pin							
Appearance configuration *Standoff height included									
mm									
Features		DIP4-pin type with reinforced insulation							
Part No.		AQY211EH	AQY212EH	AQY210EH	AQY214EH	AQY216EH			
Output	Load voltage	AC/DC							
		Peak AC	30V	60V	350V	400V			
		DC	30V	60V	350V	400V			
	Continuous load current		1A	0.55A	0.13A	0.12A			
	0.5A					0.05A			
	Peak load current		3A	1.5A	0.4A	0.3A			
	Power dissipation		500mW						
	On resistance	Typ.	0.25Ω	0.85Ω	18Ω	26Ω			
		Max.	0.5 Ω	2.5 Ω	25Ω	35Ω			
	Output capacitance (Typ.)		240pF	80pF	45pF				
Input	Off state leakage current (Max.)		1μA						
	LED forward current		50mA						
	LED reverse voltage		5V						
	Peak forward current		1A						
	Power dissipation		75mW						
	LED operate current	Typ.	1.2mA						
		Max.	3 mA						
	LED turn off current	Min.	0.4mA						
		Typ.	1.1mA						
	LED dropout voltage	Typ.	1.25V (1.14V at $I_F = 5mA$)						
		Max.	1.5V						
Turn on time		Typ.	1.5ms	1 ms	0.5ms				
		Max.	5 ms	4 ms	2 ms				
Turn off time		Typ.	0.1ms	0.05ms	0.08ms				
		Max.	1 ms	1 ms	1 ms				
Total power dissipation		550mW							
I/O isolation voltage		5,000Vrms							
I/O capacitance	Typ.	0.8pF							
	Max.	1.5pF							
Initial I/O isolation resistance (Min.)		1,000MΩ							
Safety standards		UL/C-UL	UL/C-UL, BSI						
Mass (weight) (approx.)		0.19g							

PhotoMOS® Selector Chart


GE General use and Economical

GU GE CC RF HE HF HS PD Power

Product name		GE	
Contact configuration		1 Form A	
Number of terminals		6pin	
Appearance configuration *Standoff height included			
mm			
Features		DIP6-pin type, reinforced insulation available	
Part No.		AQV210EH	AQV214EH
Output	Load voltage	AC/DC	
		Peak AC	350V
		DC	350V
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A	
		0.5A	
			0.13A
	Peak load current		0.12A
		0.4A	0.3A
	Power dissipation		
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	23Ω
		Max.	35Ω
Input	Output capacitance (Typ.)		
	Off state leakage current (Max.)		
	LED forward current		
	LED reverse voltage		
	Peak forward current		
	Power dissipation		
	LED operate current	Typ.	1.6mA
		Max.	3 mA
	LED turn off current	Min.	0.4mA
		Typ.	1.5mA
Turn on time	LED dropout voltage	Typ.	1.25V (1.14V at $I_F = 5\text{mA}$)
		Max.	1.5V
	Turn on time	Typ.	0.7 ms
		Max.	2 ms
	Turn off time	Typ.	0.05ms
		Max.	1 ms
	Total power dissipation		
	I/O isolation voltage		
I/O	capacitance	Typ.	0.8pF
		Max.	1.5pF
	Initial I/O isolation resistance (Min.)		
	Safety standards		
Mass (weight) (approx.)		0.453g	

GE General use and Economical



GU GE CC RF HE HF HS PD Power

Product name		GE				
Contact configuration		2 Form A				
Number of terminals		8pin				
Appearance configuration *Standoff height included						
mm						
Features		DIP8-pin type with reinforced insulation				
Part No.		AQW212EH	AQW210EH	AQW214EH	AQW216EH	
Output	Load voltage	AC/DC				
		Peak AC	60V	350V	400V	
		DC	60V	350V	600V	
	Continuous load current		1A			
	0.5A		0.5A	0.12A	0.1A	
	Peak load current		1.5A	0.36A	0.3A	
	Power dissipation		800mW			
	On resistance	Typ.	0.83Ω	18Ω	26Ω	
		Max.	2.5 Ω	25Ω	35Ω	
	Output capacitance (Typ.)		80pF	45pF	35pF	
Input	Off state leakage current (Max.)		1μA			
	LED forward current		50mA			
	LED reverse voltage		5V			
	Peak forward current		1A			
	Power dissipation		75mW			
	LED operate current	Typ.	1.2mA			
		Max.	3 mA			
	LED turn off current	Min.	0.4mA			
		Typ.	1.1mA			
	LED dropout voltage	Typ.	1.25V (1.14V at IF = 5mA)			
		Max.	1.5V			
Turn on time	Typ.	1.0ms	0.5ms			
		Max.	4.0ms	2 ms		
Turn off time	Typ.	0.08ms			0.04ms	
		1 ms			1 ms	
Total power dissipation		850mW				
I/O isolation voltage		5,000Vrms				
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				
Safety standards		UL/C-UL, BSI				
Mass (weight) (approx.)		0.4g				

PhotoMOS® Selector Chart


GE General use and Economical

GU GE CC RF HE HF HS PD Power

Product name		GE						
Contact configuration		1 Form B				1 Form B		
Number of terminals		4pin				6pin		
Appearance configuration *Standoff height included								
mm								
Features		Normally closed type with reinforced insulation				Normally closed type with reinforced insulation		
Part No.		AQY412EH	AQY410EH	AQY414EH	AQV412EH	AQV410EH	AQV414EH	
Output	Load voltage	AC/DC				AC/DC		
		Peak AC	60V	350V	400V	60V	350V	
		DC	60V	350V	400V	60V	350V	
	Continuous load current *6-pin type: in case of A connection		1A					
	0.5A		0.55A	0.13A	0.12A	0.55A	0.13A	0.12A
	Peak load current		1.5A	0.4A	0.3A	1.5A	0.4A	0.3A
	Power dissipation		500mW				500mW	
	On resistance *6-pin type: in case of A connection	Typ.	1 Ω	18Ω	26Ω	1 Ω	18Ω	25.2Ω
		Max.	2.5Ω	25Ω	35Ω	2.5Ω	35Ω	50 Ω
Output capacitance (Typ.)		500pF	110pF	100pF	500pF	110pF	100pF	
Off state leakage current (Max.)		10µA				10µA		
Input	LED forward current		50mA				50mA	
	LED reverse voltage		5V				5V	
	Peak forward current		1A				1A	
	Power dissipation		75mW				75mW	
	LED operate current	Typ.	1.4mA				1.9mA	
		Max.	3 mA				3 mA	
	LED turn off current	Min.	0.4mA				0.4mA	
		Typ.	1.3mA				1.8mA	
Turn on time	LED dropout voltage	Typ.	1.25V (1.14V at $I_F = 5mA$)				1.25V (1.14V at $I_F = 5mA$)	
		Max.	1.5V				1.5V	
Turn off time		Typ.	3 ms	1 ms	0.8ms	3ms	1.5ms	1.3ms
		Max.	10 ms	3 ms	3 ms	8ms	3 ms	3 ms
Total power dissipation		550mW				550mW		
I/O isolation voltage		5,000Vrms				5,000Vrms		
I/O capacitance	Typ.	0.8pF				0.8pF		
	Max.	1.5pF				1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ		
Safety standards		UL/C-UL, VDE	UL/C-UL, BSI		UL/C-UL, VDE	UL/C-UL, BSI		
Mass (weight) (approx.)		0.19g				0.453g		

GE General use and Economical

GU GE CC RF HE HF HS PD Power

Product name		GE				
Contact configuration		2 Form B	1 Form A & 1 Form B			
Number of terminals		8pin	8pin			
Appearance configuration *Standoff height included						
Features		Normally closed type with reinforced insulation	Both N.O. and N.C. contacts incorporated in a compact DIP8-pin Reinforced insulation			
Part No.		AQW414EH	AQW612EH	AQW610EH	AQW614EH	
Output	Load voltage	AC/DC	AC/DC			
		Peak AC	400V	60V	350V	
		DC	400V	60V	350V	
	Continuous load current	1A				
		0.5A		0.5A		
			0.1A		0.12A	
	Peak load current		0.3A	1.5A	0.36A	
	Power dissipation		800mW	800mW		
	On resistance	Typ.	26Ω	1 Ω	18Ω	
		Max.	35Ω	2.5Ω	25Ω	
Input	Output capacitance (Typ.)		100pF	80pF (N.O.) , 500pF (N.C.)	45pF (N.O.) , 100pF (N.C.)	
	Off state leakage current (Max.)		10µA	1µA (N.O.) , 10µA (N.C.)		
	LED forward current		50mA	50mA		
	LED reverse voltage		5V	5V		
	Peak forward current		1A	1A		
	Power dissipation		75mW	75mW		
	LED operate current	Typ.	1.3mA	1.4mA		
		Max.	3 mA	3 mA		
	LED turn off current	Min.	0.4mA	0.4mA		
		Typ.	1.2mA	1.3mA		
Turn on time	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)	1.25V (1.14V at If = 5mA)		
		Max.	1.5V	1.5V		
	Turn off time	Typ.	0.8ms	1ms (N.O.) , 3ms (N.C.)	0.5ms (N.O.) , 1ms (N.C.)	
		Max.	3 ms	4ms (N.O.) , 10ms (N.C.)	3ms	
Total power dissipation	I/O isolation voltage	Typ.	0.2ms	0.05ms (N.O.) , 0.2ms (N.C.)	0.08ms (N.O.) , 0.3ms (N.C.)	
		Max.	1 ms	1ms	1ms	
	I/O capacitance	Typ.	850mW	850mW		
		Max.	5,000VRMS	5,000VRMS		
Safety standards	Initial I/O isolation resistance (Min.)	Typ.	0.8pF	0.8pF		
		Max.	1.5pF	1.5pF		
	Mass (weight) (approx.)	Typ.	1,000MΩ	1,000MΩ		
		Max.	UL/C-UL, BSI	UL/C-UL, BSI		
	Mass (weight) (approx.)		0.4g	0.4g		

PhotoMOS® Selector Chart

CC Capacitor Coupled isolation

GU GE CC RF HE HF HS PD Power


Product name		CC TSON C × R	
Contact configuration		1 Form A	
Number of terminals		4pin	
Appearance configuration *Standoff height included			
mm			
Features		Super miniature TSON package, Capacitor Coupled isolation type	
Part No.		AQY2C1R6P	AQY2C1R2P
Output	Load voltage	AC/DC	
		30V	40V
	Peak AC	30V	40V
	DC	0.75A	0.3A
		1A	0.5A
	Continuous load current	1.5A	0.75A
	0.5A	0.25A	0.125A
	Peak load current	0.15A	0.075A
	Power dissipation	250mW	
	On resistance	0.2Ω (VIN = 5V)	0.8Ω (VIN = 5V)
Input	Typ.	0.4Ω (VIN = 5V)	1.5Ω (VIN = 5V)
	Max.	40pF	14.5pF
	Output capacitance (Typ.)	10nA	
	Off state leakage current (Max.)	5.5V	
	Input voltage	0.2V	
	Input reverse voltage	1.2mW	
	Power dissipation	1.7V	1.8V
	Operate voltage	2.5V	2.5V
	Typ.	0.5V	0.5V
	Max.	1.5V	1.4V
Turn off voltage	Min.	0.09mA (VIN = 5V)	
	Typ.	0.2 mA (VIN = 5V)	
Input current	Typ.	0.12ms (VIN = 5V)	0.06ms (VIN = 5V)
	Max.	0.5 ms (VIN = 5V)	0.5 ms (VIN = 5V)
Turn on time	Typ.	0.1 ms (VIN = 5V)	0.06ms (VIN = 5V)
	Max.	0.5 ms (VIN = 5V)	0.5 ms (VIN = 5V)
Total power dissipation		250mW	
I/O isolation voltage		200Vrms	
I/O capacitance	Typ.	1.2pF	
	Max.	3 pF	
Initial I/O isolation resistance (Min.)		—	
Safety standards		—	
Mass (weight) (approx.)		0.007g	

CC Capacitor Coupled isolation

GU GE CC RF HE HF HS PD Power

Product name		CC TSON C × R			
Contact configuration		1 Form A			
Number of terminals		4pin			
Appearance configuration *Standoff height included					
mm					
Features		Super miniature TSON package, Capacitor Coupled isolation type			
Part No.		AQY2C2R2P	AQY2C1R3P	AQY2C5R3P	
Output	Load voltage	AC/DC			
		60V	40V	100V	
		60V	40V	100V	
	Continuous load current	1A			
		0.5A			
		0.3A	0.1A	0.12A	
	Peak load current		0.9A	0.3A	
	Power dissipation		250mW		
	On resistance	Typ.	0.9Ω (VIN = 5V)	10.5Ω (VIN = 5V)	
		Max.	1.5Ω (VIN = 5V)	15 Ω (VIN = 5V)	
Input	Output capacitance (Typ.)		27pF	1.2pF	
	Off state leakage current (Max.)		5.8pF		
	Input voltage		10nA		
	Input reverse voltage		5.5V		
	Power dissipation		0.2V		
	Operate voltage	Typ.	1.7V	2.2V	
		Max.	2.5V	2.5V	
	Turn off voltage	Min.	0.5V	0.5V	
		Typ.	1.4V	1.5V	
	Input current	Typ.	0.09mA (VIN = 5V)		
		Max.	0.2 ms (VIN = 5V)		
Turn on time	Typ.	0.08ms (VIN = 5V)	0.01ms (VIN = 5V)	0.03ms (VIN = 5V)	
		Max.	0.5 ms (VIN = 5V)	0.1 ms (VIN = 5V)	
Turn off time	Typ.	0.1 ms (VIN = 5V)	0.02ms (VIN = 5V)	0.04ms (VIN = 5V)	
		Max.	0.5 ms (VIN = 5V)	0.2 ms (VIN = 5V)	
Total power dissipation		0.5 ms (VIN = 5V)			
I/O isolation voltage		0.04ms (VIN = 5V)			
I/O capacitance	Typ.	0.03ms (VIN = 5V)			
	Max.	0.2 ms (VIN = 5V)			
Initial I/O isolation resistance (Min.)		0.5 ms (VIN = 5V)			
Safety standards		—			
Mass (weight) (approx.)		—			
		0.007g			

PhotoMOS® Selector Chart

RF	Low on-resistance & low output capacitance	GU	GE	CC	RF	HE	HF	HS	PD	Power		
Product name		RF SSOP C × R3				RF VSSOP C × R3						
Contact configuration		1 Form A				1 Form A						
Number of terminals		4pin				4pin						
Appearance configuration *Standoff height included												
mm												
Features		C×R3 type, SSOP package, 20 V load voltage				C×R3 type, VSSOP package, 20 V load voltage						
Part No.		AQY221N5V				AQY221N5T						
Output	Load voltage	AC/DC		AC/DC								
		Peak AC		20V				20V				
		DC		20V				20V				
	Continuous load current		1A									
	0.5A											
	0.18A							0.18A				
	Peak load current			0.3A				—				
	Power dissipation			250mW				250mW				
	On resistance	Typ.		2.8Ω				2.8Ω				
		Max.		4.5Ω				4.5Ω				
Input	Output capacitance (Typ.)			1.1pF				1.1pF				
	Off state leakage current (Max.)			10nA				10nA				
	LED forward current			50mA				50mA				
	LED reverse voltage			5V				5V				
	Peak forward current			1A				1A				
	Power dissipation			75mW				75mW				
	LED operate current	Typ.		0.8mA				0.7mA				
		Max.		3 mA				3 mA				
	LED turn off current	Min.		0.2mA				0.2mA				
		Typ.		0.7mA				0.6mA				
	LED dropout voltage	Typ.		1.35V (1.14V at IF = 5mA)				1.14V (1.35V at IF = 50mA)				
		Max.		1.5V				1.5V				
Turn on time	Typ.			0.02ms				0.02ms				
	Max.			0.2 ms				0.2 ms				
Turn off time	Typ.			0.01ms				0.01ms				
	Max.			0.2 ms				0.2 ms				
Total power dissipation				300mW				300mW				
I/O isolation voltage				1,500Vrms				200Vrms				
I/O capacitance	Typ.			0.8pF				0.4pF				
	Max.			1.5pF				1.5pF				
Initial I/O isolation resistance (Min.)				1,000MΩ				—				
Safety standards				—				—				
Mass (weight) (approx.)				0.064g				0.026g				

RF Low on-resistance & low output capacitance

GU GE CC RF HE HF HS PD Power



Product name		RF VSSOP C × R5	RF VSSOP C × R10				
Contact configuration		1 Form A	1 Form A				
Number of terminals		4pin	4pin				
Appearance configuration *Standoff height included							
mm							
Features		4.6 mm ² mounting area C×R 10: 30 V/40 V load voltage C×R 5: 25 V load voltage					
Part No.		AQY221N3T	AQY221R6T	AQY221R2T	AQY221N2T		
Output	Load voltage	AC/DC	AC/DC				
		Peak AC	25V	30V	40V		
		DC	25V	30V	40V		
	Continuous load current	1A					
		0.5A					
		0.15A					
	Peak load current		—	1.5A	0.75A		
	Power dissipation		250mW	250mW			
	On resistance	Typ.	5.5Ω	0.18Ω	0.8 Ω		
		Max.	7.5Ω	0.35Ω	1.25Ω		
	Output capacitance (Typ.)		1.1pF	37.5pF	14pF		
	Off state leakage current (Max.)		10nA	10nA			
Input	LED forward current		50mA	50mA			
	LED reverse voltage		5V	5V			
	Peak forward current		1A	1A			
	Power dissipation		75mW	75mW			
	LED operate current	Typ.	0.7mA	0.5mA	0.5mA		
		Max.	3 mA	3 mA	3 mA		
	LED turn off current	Min.	0.2mA	0.1mA	0.1mA		
		Typ.	0.6mA	0.4mA	0.4mA		
	LED dropout voltage	Typ.	1.14V	1.14V			
		Max.	1.5 V	1.5 V			
	Turn on time		0.01ms	0.1 ms	0.1 ms		
			0.2 ms	0.5 ms	0.2 ms		
	Turn off time		0.03ms	0.06ms	0.06ms		
			0.2 ms	0.2 ms	0.2 ms		
Total power dissipation		300mW	300mW				
I/O isolation voltage		200Vrms	200Vrms				
I/O capacitance		Typ.	0.4pF	0.4pF			
		Max.	1.5pF	1.5pF			
Initial I/O isolation resistance (Min.)		—	—				
Safety standards		—	—				
Mass (weight) (approx.)		0.026g	0.026g				

PhotoMOS® Selector Chart

RF Low on-resistance & low output capacitance		GU	GE	CC	RF	HE	HF	HS	PD	Power					
Product name		RF SON C × R5			RF SON C × R10			RF SSOP C × R5							
Contact configuration		1 Form A			1 Form A			1 Form A							
Number of terminals		4pin			4pin			4pin							
Appearance configuration *Standoff height included															
		mm													
Features		Micro-miniature SON package C×R10: 40V load voltage C×R5: 25V load voltage						Miniature SSOP C×R10: 30 V/40 V load voltage C×R5: 25 V load voltage							
Part No.		AQY221N3M		AQY221R2M		AQY221N2M		AQY221N3V							
Output	Load voltage	AC/DC		AC/DC			AC/DC								
		Peak AC		25V		40V		40V		25V					
		DC		25V		40V		40V		25V					
	Continuous load current		1A												
	0.5A		0.15A	0.25A		0.12A		0.15A							
	Peak load current		—	0.75A		—		0.4A							
	Power dissipation		250mW	250mW			250mW								
	On resistance	Typ.	5.5Ω	0.8 Ω		9.5Ω		5.5Ω							
		Max.	7.5Ω	1.25Ω		12.5Ω		7.5Ω							
	Output capacitance (Typ.)		1.1pF	14pF		1.1pF		1pF							
Input	Off state leakage current (Max.)		10nA	10nA			10nA								
	LED forward current		50mA	50mA			50mA								
	LED reverse voltage		5V	5V			5V								
	Peak forward current		1A	1A			1A								
	Power dissipation		75mW	75mW			75mW								
	LED operate current	Typ.	1 mA	0.8mA		1 mA		1 mA							
		Max.	3 mA	3 mA		3 mA		3 mA							
	LED turn off current	Min.	0.2mA	0.1mA		0.2mA		0.2mA							
		Typ.	0.9mA	0.7mA		0.9mA		0.9mA							
	LED dropout voltage	Typ.	1.35V (1.14V at If = 5mA)	1.35V (1.14V at If = 5mA)			1.35V (1.14V at If = 5mA)								
		Max.	1.5V	1.5V			1.5V								
Turn on time	Typ.		0.02ms	0.2 ms		0.02ms		0.02ms							
	Max.		0.2 ms	0.5 ms		0.2 ms		0.2 ms							
Turn off time	Typ.		0.02ms	0.04ms		0.02ms		0.02ms							
	Max.		0.2 ms	0.2 ms		0.2 ms		0.2 ms							
Total power dissipation			300mW	300mW			300mW								
I/O isolation voltage			200Vrms	200Vrms			1,500Vrms								
I/O capacitance	Typ.		0.8pF	0.8pF			0.8pF								
	Max.		1.5pF	1.5pF			1.5pF								
Initial I/O isolation resistance (Min.)			—	—			1,000MΩ								
Safety standards			—	—			—								
Mass (weight) (approx.)			0.024g	0.024g			0.064g								

RF Low on-resistance & low output capacitance


GU GE CC RF HE HF HS PD Power

Product name		RF SSOP C × R10				RF SSOP C × R10 Voltage-sensitive	
Contact configuration		1 Form A				1 Form A	
Number of terminals		4pin				4pin	
Appearance configuration *Standoff height included							
		mm					
Features		Miniature SSOP C×R10: 30 V/40 V load voltage C×R5: 25 V load voltage				Space-saving SSOP 1 Form A type with built-in register 40V load voltage	
Part No.		AQY221R2V	AQY221R4V	AQY221N2V	AQY221R6V	AQY221FR2V	AQY221FN2V
Output	Load voltage	AC/DC				AC/DC	
		Peak AC	40V	40V	40V	40V	40V
		DC	40V	40V	40V	40V	40V
	Continuous load current		1A	0.5A	0.25A	0.12A	1A
	Peak load current		0.75A	1A	0.3A	1.5A	0.75A
	Power dissipation		250mW				250mW
	On resistance	Typ.	0.75Ω	0.55Ω	9.5Ω	0.18Ω	0.75Ω
		Max.	1.25Ω	1 Ω	12.5Ω	0.35Ω	1.25Ω
	Output capacitance (Typ.)		12.5pF	24pF	1pF	37.5pF	12.5pF
	Off state leakage current (Max.)		10nA				10nA
Input	LED forward current		50mA				Input voltage: 6V
	LED reverse voltage		5V				Input reverse voltage: 5V
	Peak forward current		1A				—
	Power dissipation		75mW				65mW
	LED operate current	Typ.	0.9mA		1 mA	0.7mA	Operate voltage: 1.3V
		Max.	3 mA		3 mA	3 mA	Operate voltage: 4 V
	LED turn off current	Min.	0.1mA		0.2mA	0.1mA	Turn off voltage: 0.8V
		Typ.	0.8mA		0.9mA	0.6mA	Turn off voltage: 1.3V
	LED dropout voltage	Typ.	1.35V (1.14V at If = 5mA)				Input current (Typ.) : 8.5mA (VIN = 5V)
		Max.	1.5V				
Turn on time	Typ.	0.1ms	0.25ms	0.02ms	0.2 ms	0.05ms	0.01ms
	Max.	0.5ms	0.75ms	0.5 ms	0.5 ms	0.5 ms	0.5 ms
Turn off time	Typ.	0.08ms		0.02ms	0.07ms	0.06ms	0.03ms
	Max.	0.2 ms		0.2 ms	0.2 ms	0.2 ms	0.2 ms
Total power dissipation		300mW				300mW	
I/O isolation voltage		1,500Vrms				500Vrms	
I/O capacitance	Typ.	0.8pF				0.8pF	
	Max.	1.5pF				1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ	
Safety standards		—				—	
Mass (weight) (approx.)		0.064g				0.064g	

PhotoMOS® Selector Chart


RF Low on-resistance & low output capacitance

GU GE CC RF HE HF HS PD Power

Product name		RF SOP C × R10		RF SOP C × R10		RF SOP C×R10 Voltage-sensitive		
Contact configuration		1 Form A		4 Form A		4 Form A		
Number of terminals		4pin		16pin		16pin		
Appearance configuration *Standoff height included								
mm								
Features		Miniature SOP4-pin C×R10 40V load voltage		Space-saving low C×R type 4 channels in a SOP16-pin package		Space-saving 4-channel type Built-in input resistor		
Part No.		AQY221R2S	AQY221N2S	AQS221R2S	AQS221N2S	AQS221FR2S	AQS221FN2S	
Output	Load voltage	AC/DC		AC/DC		AC/DC		
		Peak AC	40V	40V	40V	40V	40V	
		DC	40V	40V	40V	40V	40V	
	1A							
	Continuous load current		0.25A		0.16A		0.16A	
	0.5A		0.12A		0.06A		0.06A	
	Peak load current		0.75A	0.3A	0.2A	0.12A	0.2A	0.12A
	Power dissipation		300mW		600mW		600mW	
Input	On resistance	Typ.	0.8 Ω	9.5Ω	0.8 Ω	9.5Ω	0.75Ω	9.5Ω
		Max.	1.25Ω	12.5Ω	1.25Ω	12.5Ω	1.25Ω	12.5Ω
	Output capacitance (Typ.)		13pF	1pF	13pF	1pF	12.5pF	1pF
	Off state leakage current (Max.)		10nA		10nA		10nA	
	LED forward current		50mA		50mA		Input voltage: 6V	
	LED reverse voltage		5V		5V		Input reverse voltage: 5V	
	Peak forward current		1A		1A		—	
	Power dissipation		75mW		75mW		260mW (65mW per channel)	
LED	Operate current	Typ.	0.5mA	0.9 mA	0.5mA	0.9 mA	Operate voltage: 1.3V	
		Max.	3 mA	3 mA	3 mA	3 mA	Operate voltage: 4V	
	Turn off current	Min.	0.1mA	0.2 mA	0.1mA	0.1 mA	Turn off voltage: 0.8V	
		Typ.	0.4mA	0.85mA	0.4mA	0.85mA	Turn off voltage: 1.3V	
	Dropout voltage	Typ.	1.25V (1.14V at IF = 5mA)		1.25V (1.14V at IF = 5mA)		Input current (Typ.): 8.5mA (VIN = 5V)	
		Max.	1.5V		1.5V			
Turn on time	Typ.	0.1 ms	0.03ms	0.15ms	0.03vms	0.07ms	0.02ms	
	Max.	0.5 ms	0.5 ms	0.5 ms	0.2 ms	0.5 ms	0.5 ms	
Turn off time	Typ.	0.06ms	0.03ms	0.06ms	0.03ms	0.07ms	0.02ms	
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	
Total power dissipation		350mW		650mW		650mW		
I/O isolation voltage		500Vrms	1,500Vrms	500Vrms		500Vrms		
I/O capacitance	Typ.	0.8pF		0.8pF		0.8pF		
	Max.	1.5pF		1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ		
Safety standards		—		—		—		
Mass (weight) (approx.)		0.084g		0.195g		0.195g		

RF Low on-resistance & low output capacitance

GU GE CC RF HE HF HS PD Power

Product name		RF VSSOP C × R		RF SSOP C × R			RF SOP C × R		
Contact configuration		1 Form A		1 Form A			1 Form A		
Number of terminals		4pin		4pin			4pin		
Appearance configuration *Standoff height included		 mm		 mm			 mm		
Features		CxR type VSSOP package 60V and 100V load voltage		CxR type SSOP package 60 V, 80 V and 100 V load voltage			Miniature SOP4-pin type Low C R 60V/80V load voltage		
Part No.		AQY222R2T	AQY225R3T	AQY222R2V	AQY225R2V	AQY225R3V	AQY222R1S	AQY225R1S	AQY225R2S
Output	Load voltage	AC/DC		AC/DC			AC/DC		
		Peak AC		60V	100V	60V	80V	100V	60V
		DC		60V	100V	60V	80V	100V	60V
	Continuous load current		1A						
	0.5A		0.4A	0.4A			0.5A		
	0.12A		0.12A	0.12A			0.35A		
	Peak load current		1.2A	0.3A	1.2A	0.3A	0.3A	1A	0.7A
	Power dissipation		250mW			250mW			300mW
	On resistance	Typ.	0.8 Ω	8.8Ω	0.8 Ω	10.5Ω	8.8Ω	0.8Ω	0.8Ω
		Max.	1.25Ω	14 Ω	1.25Ω	15 Ω	14 Ω	1.2Ω	1.2Ω
Input	Output capacitance (Typ.)		27pF	5.8pF	27pF	4.5pF	5.8pF	24.5pF	37.5pF
	Off state leakage current (Max.)		10nA			10nA			10nA
	LED forward current		50mA			50mA			50mA
	LED reverse voltage		5V			5V			5V
	Peak forward current		1A			1A			1A
	Power dissipation		75mW			75mW			75mW
	LED operate current	Typ.	0.4 mA			0.5 mA			0.5 mA
		Max.	3 mA			3 mA			3 mA
	LED turn off current	Min.	0.1 mA			0.1 mA			0.1 mA
		Typ.	0.35mA			0.45mA			0.45mA
	LED dropout voltage	Typ.	1.14V (1.35V at If = 50mA)			1.32V (1.14V at If = 5mA)			1.32V (1.14V at If = 5mA)
		Max.	1.5V			1.5V			1.5V
Turn on time	Typ.	0.12ms	0.04ms	0.15ms	0.05ms		0.15ms	0.25ms	0.05ms
	Max.	0.5 ms	0.5 ms	0.5 ms	0.5 ms		0.5 ms	0.75ms	0.5 ms
Turn off time	Typ.	0.08ms	0.05ms	0.08ms	0.05ms		0.06ms	0.08ms	0.05ms
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms		0.2 ms	0.2 ms	0.2 ms
Total power dissipation		300mW			300mW			350mW	
I/O isolation voltage		200Vrms			1,500Vrms			1,500Vrms	
I/O capacitance	Typ.	0.8pF			0.8pF			0.8pF	
	Max.	1.5pF			1.5pF			1.5pF	
Initial I/O isolation resistance (Min.)		—			1,000MΩ			1,000MΩ	
Safety standards		—			—			—	UL/C-UL
Mass (weight) (approx.)		0.026g			0.064g			0.084g	

PhotoMOS® Selector Chart




RF Low on-resistance & low output capacitance

GU GE CC RF HE HF HS PD Power

Product name		RF SOP C × R	RF SOP Low on-resistance		RF Low on-resistance		
Contact configuration		2 Form A	1 Form A		1 Form A		
Number of terminals		8pin	6pin		6pin		
Appearance configuration *Standoff height included		mm					
Features		Miniature SOP8-pin type Low C×R High load voltage of 250V	Miniature SOP6-pin type Low on-resistance 200V/400V load voltage		DIP6-pin type featuring low on- resistance 200V/400V load voltage		
Part No.		AQW223R2S	AQV227NS	AQV224NS	AQV227N	AQV224N	
Output	Load voltage	AC/DC	AC/DC		AC/DC		
		Peak AC	250V	200V	400V	200V	400V
		DC	250V	200V	400V	200V	400V
	Continuous load current *6-pin type: in case of A connection		1A				
	0.5A		0.14A	0.05A	0.04A	0.07A	0.05A
	Peak load current		0.42A	0.15A	0.12A	0.21A	0.15A
	Power dissipation		600mW	450mW		360mW	
	On resistance *6-pin type: in case of A connection	Typ.	11Ω	30Ω	70Ω	30Ω	70Ω
		Max.	15Ω	50Ω	100Ω	50Ω	100Ω
	Output capacitance (Typ.)		33pF	10pF		10pF	
Input	Off state leakage current (Max.)		10nA	10nA		10nA	
	LED forward current		50mA	50mA		50mA	
	LED reverse voltage		5V	5V		5V	
	Peak forward current		1A	1A		1A	
	Power dissipation		75mW	75mW		75mW	
	LED operate current	Typ.	0.5 mA	0.7 mA		0.9 mA	
		Max.	3 mA	3 mA		3 mA	
	LED turn off current	Min.	0.1 mA	0.4 mA		0.4 mA	
		Typ.	0.45mA	0.65mA		0.85mA	
	LED dropout voltage	Typ.	1.32V (1.14V at If = 5mA)	1.25V (1.14V at If = 5mA)		1.25V (1.14V at If = 5mA)	
		Max.	1.5V	1.5V		1.5V	
Turn on time	Typ.	0.15ms	0.12ms	0.1ms	0.2 ms		
	Max.	0.5 ms	0.5 ms	0.5ms	0.5 ms		
Turn off time	Typ.	0.05ms	0.05ms		0.08ms		
	Max.	0.2 ms	0.2 ms		0.2 ms		
Total power dissipation		650mW	500mW		410mW		
I/O isolation voltage		1,500Vrms	1,500Vrms		1,500Vrms		
I/O capacitance	Typ.	0.8pF	0.8pF		0.8pF		
	Max.	1.5pF	1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ		1,000MΩ		
Safety standards		—	UL/C-UL		UL/C-UL		
Mass (weight) (approx.)		0.195g	0.125g		0.453g		

RF Low on-resistance & low output capacitance


GU GE CC RF HE HF HS PD Power

Product name		RF SOP Low on-resistance	RF Low on-resistance	RF SOP C × R
Contact configuration		2 Form A	2 Form A	4 Form A
Number of terminals		8pin	8pin	16pin
Appearance configuration *Standoff height included				
mm				
Features		Miniature SOP8-pin type Low on-resistance 200V load voltage	DIP8-pin type featuring low on-resistance 200V/400V load voltage	Space-saving SOP16-pin type Low on-resistance 80V load voltage
Part No.		AQW227NS	AQW227N	AQW224N
Output	Load voltage	AC/DC	AC/DC	
		200V	200V	400V
		200V	200V	400V
	Continuous load current	1A		
Input	Peak load current	0.5A		
		0.04A	0.05A	0.04A
		0.15A	0.15A	0.12A
	Power dissipation	600mW	800mW	
Output	On resistance	Typ.	30Ω	70 Ω
		Max.	50Ω	100Ω
	Output capacitance (Typ.)	10pF	10pF	
	Off state leakage current (Max.)	10nA	10nA	
LED forward current		50mA	50mA	
LED reverse voltage		5V	5V	
Peak forward current		1A	1A	
Power dissipation		75mW	75mW	
Input	LED operate current	Typ.	0.7 mA	0.9mA
		Max.	3 mA	3 mA
	LED turn off current	Min.	0.4 mA	0.4mA
		Typ.	0.65mA	0.8mA
Output	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)	1.25V (1.14V at If = 5mA)
		Max.	1.5V	1.5V
	Turn on time	Typ.	0.25ms	0.2 ms
		Max.	0.5 ms	0.3 ms
Turn off time	Typ.	0.08ms	0.08ms	0.07ms
	Max.	0.2 ms	0.2 ms	0.2 ms
Total power dissipation		650mW	850mW	
I/O isolation voltage		1,500Vrms	1,500Vrms	
I/O capacitance	Typ.	0.8pF	0.8pF	
	Max.	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ	
Safety standards		UL/C-UL	UL/C-UL	
Mass (weight) (approx.)		0.195g	0.5g	

PhotoMOS® Selector Chart


HE Low on-resistance & Economical

GU GE CC RF HE HF HS PD Power

Product name			HE																
Contact configuration			1 Form A																
Number of terminals			6pin																
Appearance configuration *Standoff height included																			
mm																			
Features			DIP6-pin type with low on-resistance and reinforced insulation																
Part No.			AQV251	AQV252	AQV255	AQV257	AQV253	AQV254	AQV259	AQV258	AQV253H	AQV254H	AQV256H						
Output	Load voltage			AC/DC															
		Peak AC		40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V					
		DC		40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V					
	1A																		
	0.5A		0.5A	0.4A	0.35A	0.25A	0.2A	0.15A	0.03A	0.02A	0.2A	0.15A	0.13A						
	Continuous load current *6-pin type: in case of A connection																		
	Peak load current		1.8A	1.5A	1.0A	0.75A	0.6A	0.5A	0.09A	0.06A	0.6A	0.5A	0.4A						
	Power dissipation		360mW																
	On resistance *6-pin type: in case of A connection	Typ.	0.6Ω	0.74Ω	1.8Ω	2.6Ω	5.5Ω	12.4Ω	85Ω	345Ω	5.5Ω	12.4Ω	20Ω						
		Max.	1 Ω	1.4Ω	2.5Ω	4 Ω	8 Ω	16 Ω	200Ω	500Ω	8 Ω	16 Ω	30Ω						
Output capacitance (Typ.)		350pF				170pF				80pF		170pF							
Off state leakage current (Max.)		1μA				10μA				1μA									
Input	LED forward current		50mA																
	LED reverse voltage		5V																
	Peak forward current		1A																
	Power dissipation		75mW																
	LED operate current	Typ.	0.9mA								1.4mA								
		Max.	3 mA								3 mA								
	LED turn off current	Min.	0.4mA								0.4mA								
		Typ.	0.8mA								1.3mA								
	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)																
		Max.	1.5V																
Turn on time		Typ.	1.7ms	1.4ms	0.9 ms	1.5ms	0.8ms		0.6 ms	0.35ms	2.4 ms	1.8 ms	1.2 ms						
		Max.	3 ms	3 ms	2 ms	3 ms	2 ms		1 ms	1 ms	4 ms	3 ms	3 ms						
Turn off time		Typ.	0.07ms		0.09ms	0.1ms	0.06ms	0.05ms	0.04ms	0.04ms	0.06ms	0.05ms	0.06ms						
		Max.	0.2 ms		0.2 ms	0.2ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms						
Total power dissipation			410mW																
I/O isolation voltage			1,500Vrms								5,000Vrms								
I/O capacitance	Typ.	1.3pF																	
		Max.	3 pF																
Initial I/O isolation resistance (Min.)			1,000MΩ																
Safety standards			UL/C-UL						UL/C-UL, VDE	UL/C-UL, BSI	UL/C-UL, VDE								
Mass (weight) (approx.)			0.453g																

HE Low on-resistance & Economical


GU GE CC RF HE HF HS PD Power

Product name		HE SOP High Capacity				
Contact configuration		1 Form A				
Number of terminals		6pin				
Appearance configuration *Standoff height included						
		mm				
Features		Miniature SOP6-pin type with high capacity of 3A load current				
Part No.		AQV252G2S	AQV252G3S	AQV255GS	AQV255G3S	
Output	Load voltage	AC/DC				
		Peak AC	50V	60V	80V	
	DC	50V	60V	80V	100V	
		3A	3A	3.3A	2.2A	
	Continuous load current *6-pin type: in case of A connection		2A			
	1A			1.25A		
	Peak load current		6A	10A	3A	
	Power dissipation		450mW			
	On resistance *6-pin type: in case of A connection	Typ.	0.04Ω	0.033Ω	0.09Ω	
		Max.	0.07Ω	0.06 Ω	0.15Ω	
Input	Output capacitance (Typ.)		360pF	510pF	300pF	
	Off state leakage current (Max.)		1μA			
	LED forward current		50mA			
	LED reverse voltage		5V			
	Peak forward current		1A			
	Power dissipation		75mW			
	LED operate current	Typ.	0.6mA	0.5mA	0.5mA	
		Max.	3 mA	3 mA	3 mA	
	LED turn off current	Min.	0.2mA	0.2mA	0.2mA	
		Typ.	0.5mA	0.4mA	0.4mA	
	LED dropout voltage	Typ.	1.32V (1.14V at IF = 5mA)			
		Max.	1.5V			
Turn on time	Typ.	1.5 ms	1.8 ms	1.3ms	1.8 ms	
		Max.	5.0 ms	5 ms	5.ms	
Turn off time	Typ.	0.08ms	0.15ms	0.1ms	0.15ms	
		Max.	0.5 ms	0.5 ms	0.5 ms	
Total power dissipation		500mW				
I/O isolation voltage		1,500Vrms				
I/O capacitance	Typ.	0.8pF				
		1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				
Safety standards		UL/C-UL, VDE	UL/C-UL	UL/C-UL, VDE	UL/C-UL	
Mass (weight) (approx.)		0.125g				

PhotoMOS® Selector Chart



HE Low on-resistance & Economical

GU GE CC RF HE HF HS PD Power

Product name		HE High Capacity				
Contact configuration		1 Form A				
Number of terminals		6pin				
Appearance configuration *Standoff height included						
mm						
Features		Capable of 2A to 3A high-frequency load				
Part No.		AQV251G	AQV252G	AQV252G3	AQV255G3	
Output	Load voltage	AC/DC				
		Peak AC	30V	60V	60V	
		DC	30V	60V	60V	
	Continuous load current <small>*6-pin type: in case of A connection</small>	3A	3.5A	3.5A	3.5A	
		2A	2.5A			
		1A			2.4A	
	Peak load current		6.0A	6.0A	10A	
	Power dissipation		600mW			
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	0.035Ω	0.08Ω	0.033Ω	
		Max.	0.08 Ω	0.12Ω	0.06 Ω	
	Output capacitance (Typ.)		330pF	240pF	510pF	
	Off state leakage current (Max.)		1μA			
Input	LED forward current		50mA			
	LED reverse voltage		5V			
	Peak forward current		1A			
	Power dissipation		75mW			
	LED operate current	Typ.	0.55mA	0.5mA	0.5mA	
		Max.	3 mA	3 mA	3 mA	
	LED turn off current	Min.	0.2mA			
		Typ.	0.45mA		0.4mA	
	LED dropout voltage	Typ.	1.32V (1.14V at IF = 5mA)			
		Max.	1.5V			
	Turn on time	Typ.	1.1ms		1.8ms	
		Max.	5ms			
	Turn off time	Typ.	0.1ms	0.25ms	0.15ms	
		Max.	0.5ms	0.5 ms	0.5 ms	
Total power dissipation		650mW				
I/O isolation voltage		1,500Vrms				
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				
Safety standards		UL/C-UL, VDE		UL/C-UL	UL/C-UL, VDE	
Mass (weight) (approx.)		0.453g				

HE Low on-resistance & Economical




GU GE CC RF HE HF HS PD Power

Product name		HE						
Contact configuration		1 Form A			1 Form B			
Number of terminals		5pin			6pin			
Appearance configuration *Standoff height included		mm						
Features			Ideal for industrial battery monitoring system (BMS)	Normally closed DIP6-pin type Low on-resistance with 250V/400V load voltage				
Part No.		AQV258H5	AQV453	AQV454	AQV454H			
Output	Load voltage	AC/DC	AC/DC					
		Peak AC	1500V	250V	400V	400V		
		DC	1500V	250V	400V	400V		
	Continuous load current *6-pin type: in case of A connection	1A						
		0.5A						
			0.02A	0.2A	0.15A	0.15A		
	Peak load current		0.06A	0.6A	0.5A			
	Power dissipation		360mW	360mW				
	On resistance *6-pin type: in case of A connection	Typ.	315Ω	5.5Ω	11Ω			
		Max.	500Ω	8 Ω	16Ω			
Input	Output capacitance (Typ.)		60pF	350pF	170pF			
	Off state leakage current (Max.)		10µA	1µA		10µA		
	LED forward current		50mA	50mA				
	LED reverse voltage		5V	5V				
	Peak forward current		1A	1A				
	Power dissipation		75mW	75mW				
	LED operate current	Typ.	1.4mA	1 mA	0.9mA	1.4mA		
		Max.	3.0mA	3 mA	3 mA	3 mA		
	LED turn off current	Min.	0.2mA	0.4mA	0.4mA	0.4mA		
		Typ.	1.3mA	0.9mA	0.8mA	1.3mA		
Turn on time	LED dropout voltage	Typ.	1.32V	1.25V (1.14V at If = 5mA)				
		Max.	1.5V	1.5V				
	Turn off time	Typ.	0.35ms	1.52ms	1.2 ms	1.8 ms		
		Max.	1.0 ms	3 ms	2 ms	3 ms		
Total power dissipation		410mW	410mW					
I/O isolation voltage		5000Vrms	1,500Vrms		5,000Vrms			
I/O capacitance	Typ.	1.3pF	1.3pF					
	Max.	3 pF	3 pF					
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ					
Safety standards		UL/C-UL	UL/C-UL		UL/C-UL, BSI			
Mass (weight) (approx.)		0.45g	0.453g					

PhotoMOS® Selector Chart


HE Low on-resistance & Economical

GU GE CC RF HE HF HS PD Power

Product name		HE			
Contact configuration		2 Form A	2 Form B	1 Form A & 1 Form B	
Number of terminals		8pin	8pin	8pin	
Appearance configuration *Standoff height included					
Features		DIP8-pin type featuring low on-resistance with 400V load voltage	Normally closed (2 Form B) DIP6-pin type Low on-resistance with 400V load voltage	Both 1 Form A and 1 Form B contacts incorporated in a compact DIP8-pin with low on-resistance	
Part No.		AQW254	AQW454	AQW654	
Output	Load voltage	AC/DC	AC/DC	AC/DC	
		Peak AC	400V	400V	
		DC	400V	400V	
	1A				
	Continuous load current				
	0.5A				
	0.12A		0.12A	0.12A	
	Peak load current		0.36A	0.36A	
	Power dissipation		800mW	800mW	
	On resistance	Typ.	10.2Ω	11Ω	
		Max.	16 Ω	16Ω	
Output capacitance (Typ.)		170pF	170pF	170pF	
Off state leakage current (Max.)		1μA	1μA	1μA	
Input	LED forward current		50mA	50mA	
	LED reverse voltage		5V	5V	
	Peak forward current		1A	1A	
	Power dissipation		75mW	75mW	
	LED operate current	Typ.	0.9mA	0.9mA	
		Max.	3 mA	3 mA	
	LED turn off current	Min.	0.4mA	0.4mA	
		Typ.	0.8mA	0.8mA	
	LED dropout voltage	Typ.	1.25V (1.14V at If = 5mA)	1.25V (1.14V at If = 5mA)	
		Max.	1.5V	1.5V	
Turn on time		Typ.	0.8 ms	1.2 ms	
		Max.	2 ms	2ms	
Turn off time		Typ.	0.04ms	0.36ms	
		Max.	0.2 ms	1 ms	
Total power dissipation		850mW	850mW	850mW	
I/O isolation voltage		1,500Vrms	1,500Vrms	1,500Vrms	
I/O capacitance	Typ.	0.8pF	0.8pF	0.8pF	
	Max.	1.5pF	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ	1,000MΩ	
Safety standards		UL/C-UL	UL/C-UL	UL/C-UL	
Mass (weight) (approx.)		0.5g	0.5g	0.5g	

HF Low on-resistance


GU GE CC RF HE HF HS PD Power

Product name		HF																
Contact configuration		1 Form A																
Number of terminals		6pin																
Appearance configuration *Standoff height included																		
mm																		
Features		DIP6-pin type with wide variation Low on-resistance																
Part No.			AQV101	AQV102	AQV103	AQV104	AQV201	AQV202	AQV203	AQV204								
Output	Load voltage			DC				AC/DC										
		Peak AC		—				40V	60V	250V	400V							
		DC		40V	60V	250V	400V	40V	60V	250V	400V							
	Continuous load current *6-pin type: in case of A connection		1A															
			0.5A	0.7A	0.6A	0.3A	0.18A	0.5A	0.4A	0.2A	0.15A							
	Peak load current		1.8A	1.5A	0.6A	0.5A	1.8A	1.5A	0.6A	0.5A								
	Power dissipation		360mW				360mW											
	On resistance *6-pin type: in case of A connection	Typ.	0.3Ω	0.37Ω	2.7Ω	6.3Ω	0.6Ω	0.74Ω	5.5Ω	12.4Ω								
		Max.	0.5Ω	0.7 Ω	4 Ω	8 Ω	1 Ω	1.4 Ω	8 Ω	16 Ω								
	Output capacitance (Typ.)		600pF		300pF		350pF		170pF									
	Off state leakage current (Max.)		1μA															
Input	LED forward current		50mA															
	LED reverse voltage		10V															
	Peak forward current		1A															
	Power dissipation		150mW															
	LED operate current	Typ.	2.3mA				2.4mA											
		Max.	5 mA				5 mA											
	LED turn off current	Min.	0.8mA															
		Typ.	2.2mA															
Turn on time	LED dropout voltage	Typ.	2.3V															
		Max.	3 V															
Turn on time		Typ.	0.23ms	0.22ms	0.13ms	0.09ms	0.38ms	0.41ms	0.21ms	0.18ms								
Turn off time		Max.	1 ms															
Total power dissipation		410mW																
I/O isolation voltage		1,500VRms																
I/O capacitance	Typ.	1.3pF																
		3 pF																
Initial I/O isolation resistance (Min.)		1,000MΩ																
Safety standards		UL/C-UL																
Mass (weight) (approx.)		0.453g																

PhotoMOS® Selector Chart


HS High sensitivity

GU GE CC RF HE HF HS PD Power

Product name		HS	HS SOP			
Contact configuration		1 Form A	1 Form A			
Number of terminals		6pin	4pin			
Appearance configuration *Standoff height included		 mm				
Features		DIP6-pin type featuring high sensitivity	Recommended LED forward current 2 mA, High Sensitivity (Low current-consumption) Miniature SOP4-pin Type			
Part No.		AQV234	AQY232S	AQY230S	AQY234S	
Output	Load voltage	AC/DC	AC/DC			
		Peak AC	400V	60V	350V	
		DC	400V	60V	350V	
	1A					
	Continuous load current *6-pin type: in case of A connection					
	0.5A		0.5A			
			0.12A			
	Peak load current		0.3A	1.5A	0.3A	
	Power dissipation		500mW	300mW		
	On resistance *6-pin type: in case of A connection	Typ.	30Ω	0.85Ω	19Ω	
		Max.	50Ω	2.5 Ω	25Ω	
Output capacitance (Typ.)		45pF	80pF	32pF	35pF	
Off state leakage current (Max.)		1μA	1μA			
Input	LED forward current		50mA	50mA		
	LED reverse voltage		5V	5V		
	Peak forward current		1A	1A		
	Power dissipation		75mW	75mW		
	LED operate current	Typ.	0.31mA	0.35mA		
		Max.	0.5 mA	0.5 mA		
	LED turn off current	Min.	0.1 mA	0.1 mA		
		Typ.	0.29mA	0.3 mA		
	LED dropout voltage	Typ.	1.25V (1.1V at $I_F = 2\text{mA}$)	1.25V (1.1V at $I_F = 2\text{mA}$)		
		Max.	1.5V	1.5V		
Turn on time		Typ.	0.89ms	1.5 ms	1.2 ms	
		Max.	2 ms	5 ms	5 ms	
Turn off time		Typ.	0.22ms	0.15ms	0.1 ms	
		Max.	1 ms	2 ms	2 ms	
Total power dissipation		550mW	350mW			
I/O isolation voltage		1,500Vrms	1,500Vrms			
I/O capacitance	Typ.	0.8pF	0.8pF			
	Max.	1.5pF	1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ			
Safety standards		UL/C-UL	UL/C-UL, VDE			
Mass (weight) (approx.)		0.453g	0.084g			

PD Flat & power


GU GE CC RF HE HF HS PD Power

Product name		PD					
Contact configuration		1 Form A					
Number of terminals		4pin					
Appearance configuration *Standoff height included							
		mm					
Features		Flat Power-DIP4-pin type with high capacity up to 2A load current					
Part No.		AQY272	AQY275	AQY277	AQY274		
Output	Load voltage	AC/DC					
		Peak AC	60V	100V	200V		
		DC	60V	100V	200V		
	Continuous load current		2A	1.3A	0.65A		
	0.5A				0.35A		
	1A						
	2A						
	6A		4A	2A	1A		
	Power dissipation		700mW				
	On resistance	Typ.	0.11Ω	0.23Ω	0.7Ω		
		Max.	0.18Ω	0.34Ω	1.1Ω		
Output capacitance (Typ.)		1,400pF		600pF			
Off state leakage current (Max.)		10µA					
Input	LED forward current		50mA				
	LED reverse voltage		5V				
	Peak forward current		1A				
	Power dissipation		75mW				
	LED operate current	Typ.	1 mA				
		Max.	3 mA				
	LED turn off current	Min.	0.4mA				
		Typ.	0.9mA				
	LED dropout voltage	Typ.	1.25V (1.16V at If = 10mA)				
		Max.	1.5V				
Turn on time		Typ.	2.46ms	2.4 ms	1.12ms		
		Max.	5 ms	5 ms	5 ms		
Turn off time		Typ.	0.22ms	0.21ms	0.1 ms		
		Max.	3 ms	3 ms	3 ms		
Total power dissipation		750mW					
I/O isolation voltage		2,500Vrms					
I/O capacitance	Typ.	0.8pF					
		1.5pF					
Initial I/O isolation resistance (Min.)		1,000MΩ					
Safety standards		UL/C-UL, VDE					
Mass (weight) (approx.)		0.62g					

PhotoMOS® Selector Chart


Power Slim & power

GU GE CC RF HE HF HS PD Power

Product name		Power													
Contact configuration		1 Form A													
Number of terminals		4pin													
Appearance configuration *Standoff height included															
mm															
Features		Slim type with high capacity up to 4A DC load type also available													
Part No.		AQZ102	AQZ105	AQZ107	AQZ104	AQZ202	AQZ205	AQZ207	AQZ204						
Output	Load voltage	DC				AC/DC									
		—				60V	100V	200V	400V						
		60V	100V	200V	400V	60V	100V	200V	400V						
	Continuous load current	4A	2.6A	1.3A	0.7A	3A	2A	1A	0.5A						
		3A	1A												
	Peak load current		9.0A	6.0A	3.0A	1.5A	9.0A	6.0A	3.0A						
	Power dissipation		1.35W				1.6W								
	On resistance	Typ.	0.05Ω	0.081Ω	0.34Ω	1.06Ω	0.11Ω	0.23Ω	0.7Ω						
		Max.	0.09Ω	0.17 Ω	0.55Ω	1.6 Ω	0.18Ω	0.34Ω	1.1Ω						
	Output capacitance (Typ.)		1,700pF		900pF		1,400pF		600pF						
Input	Off state leakage current (Max.)		10µA												
	LED forward current		50mA												
	LED reverse voltage		5V												
	Peak forward current		1A												
	Power dissipation		75mW												
	LED operate current	Typ.	1mA												
		Max.	3mA												
	LED turn off current	Min.	0.4mA												
		Typ.	0.9mA												
	LED dropout voltage	Typ.	1.25V (1.16V at If = 10mA)												
		Max.	1.5V												
Turn on time		Typ.	1.66ms	1.89ms	0.83ms	1.01ms	2.46ms	2.4ms	1.12ms	1.65ms					
		Max.	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms					
Turn off time		Typ.	0.15ms	0.19ms	0.08ms	0.08ms	0.22ms	0.21ms	0.10ms	0.08ms					
		Max.	3 ms	3 ms	3 ms	3 ms	3 ms	3 ms	3 ms	3 ms					
Total power dissipation		1.35W				1.6W									
I/O isolation voltage		2,500Vrms													
I/O capacitance		Typ.	0.8pF												
		Max.	1.5pF												
Initial I/O isolation resistance (Min.)		1,000MΩ													
Safety standards		UL/C-UL, VDE													
Mass (weight) (approx.)		1.65g													

Power Slim & power



GU GE CC RF HE HF HS PD Power

Product name		Power	Power Voltage-sensitive								
Contact configuration		1 Form B	1 Form A								
Number of terminals		4pin	4pin								
Appearance configuration *Standoff height included		mm									
Features		Normally closed type in a slim SIL package Load voltage 400V	Slim and high capacity up to 3.6A Voltage-driven type								
Part No.		AQZ404	AQZ102D	AQZ105D	AQZ107D	AQZ104D					
Load voltage	AC/DC	DC									
	Peak AC	400V									
Continuous load current	DC	60V 100V 200V 400V									
	3A	3.6A									
Output	1A	2.3A									
	0.5A	1.1A									
Peak load current		1.5A	9A	6A	3A	1.5A					
Power dissipation		1.6W	1.35W								
On resistance	Typ.	2.8Ω	0.033Ω	0.09Ω	0.33Ω	1.23Ω					
	Max.	4.0Ω	0.09 Ω	0.17Ω	0.55Ω	1.6 Ω					
Output capacitance (Typ.)		2,000pF	1,700pF		900pF						
Off state leakage current (Max.)		10µA	10µA								
Input		LED forward current	50mA	Input voltage: 30V							
		LED reverse voltage	5V	Input reverse voltage: 5V							
		Peak forward current	1A	—							
		Power dissipation	75mW	300mW							
LED operate current	Typ.	1mA	Operate voltage: 1.4V								
	Max.	3mA	Operate voltage: 4 V								
LED turn off current	Min.	0.4mA	Turn off voltage: 0.8V								
	Typ.	0.9mA	Turn off voltage: 1.3V								
LED dropout voltage	Typ.	1.25V (1.16V at If = 10mA)	Input current (Typ.): 6.5mA								
	Max.	1.5V									
Turn on time		Typ.	3.9ms	3.3ms	2.2ms	1.5ms					
		Max.	7.5ms	10 ms	10 ms	10 ms					
Turn off time		Typ.	0.8ms	0.2ms		0.1ms					
		Max.	3 ms	3 ms		3 ms					
Total power dissipation		1.6W	1.35W								
I/O isolation voltage		2,500Vrms	2,500Vrms								
I/O capacitance	Typ.	0.8pF	0.8pF								
	Max.	1.5pF	1.5pF								
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ								
Safety standards		UL/C-UL, VDE	UL/C-UL, VDE								
Mass (weight) (approx.)		1.65g	1.65g								

PhotoMOS® Selector Chart


Power Slim & power

GU GE CC RF HE HF HS PD Power




Product name		Power Voltage-sensitive				Power High Capacity						
Contact configuration		1 Form A				1 Form A						
Number of terminals		4pin				4pin						
Appearance configuration *Standoff height included												
mm												
Features		Slim and high capacity up to 3.6A Voltage-driven type				High capacity up to 6A in a slim SIL package						
Part No.		AQZ202D	AQZ205D	AQZ207D	AQZ204D	AQZ202G	AQZ205G	AQZ207G	AQZ206G2			
Output	Load voltage	AC/DC				AC/DC						
		Peak AC	60V	100V	200V	400V	60V	100V	200V			
		DC	60V	100V	200V	400V	60V	100V	200V			
	6A						6A					
	1A		2.7A				4A					
	0.5A		1.8A				2A					
	0.9A		0.45A				1A					
	Peak load current		9A	6A	3A	1.5A	12A	8A	6A	3A		
	Power dissipation		1.6W				1.6W					
	On resistance	Typ.	0.066Ω	0.18Ω	0.64Ω	2.4Ω	0.015Ω	0.035Ω	0.18Ω	0.52Ω		
		Max.	0.18 Ω	0.34Ω	1.1 Ω	3.2Ω	0.03 Ω	0.06 Ω	0.35Ω	0.8 Ω		
Output capacitance (Typ.)		1,400pF		600pF		1,600pF	1,240pF	700pF	3,000pF			
Off state leakage current (Max.)		10µA				10µA						
Input	LED forward current		Input voltage: 30V				50mA					
	LED reverse voltage		Input reverse voltage: 5V				5V					
	Peak forward current		—				1A					
	Power dissipation		300mW				75mW					
	LED operate current	Typ.	Operate voltage: 1.4V				1mA					
		Max.	Operate voltage: 4 V				3mA					
	LED turn off current	Min.	Turn off voltage: 0.8V				0.2mA					
		Typ.	Turn off voltage: 1.3V				0.9mA					
	LED dropout voltage	Typ.	Input current (Typ.): 6.5mA				1.25V (1.16V at IF = 10mA)					
		Max.					1.5V					
Turn on time		Typ.	5.8ms	4.2ms	2.7ms	2.3ms	3.8ms	5.0ms	2.5ms	3.0ms		
		Max.	10 ms	10 ms	10 ms	10 ms	10 ms	10 ms	10 ms	10 ms		
Turn off time		Typ.	0.2ms		0.1ms		0.2ms	0.3ms	0.2ms	0.2ms		
		Max.	3 ms		3 ms		3 ms	3 ms	3 ms	3 ms		
Total power dissipation		1.6W				1.6W						
I/O isolation voltage		2,500Vrms				2,500Vrms						
I/O capacitance		Typ.	0.8pF				0.8pF					
		Max.	1.5pF				1.5pF					
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ						
Safety standards		UL/C-UL, VDE				UL/C-UL, VDE						
Mass (weight) (approx.)		1.65g				1.65g						

Power Slim & power

GU GE CC RF HE HF HS PD Power

Product name		Power DC High Capacity	
Contact configuration		1 Form A	
Number of terminals		6pin	
Appearance configuration *Standoff height included			
mm			
Features		Max. high capacity 10A in a slim SIL package	
Part No.		AQZ192	AQZ197
Output	Load voltage	DC	
		—	—
		60V	200V
	Continuous load current	10A	
		6A	
		1A	
		0.5A	
	Peak load current	30A	15A
Input	Power dissipation	2W	
	On resistance	0.008Ω	0.031Ω
		0.015Ω	0.05 Ω
	Output capacitance (Typ.)		2,100pF
	Off state leakage current (Max.)		10µA
	LED forward current		50mA
	LED reverse voltage		5V
	Peak forward current		1A
	Power dissipation		75mW
Turn on time	LED operate current	0.7mA	
	LED turn off current	3 mA	
	LED dropout voltage	0.2mA	
	Typ.	0.5mA	
Turn off time	Typ.	1.35V (1.17V at If = 10mA)	
	Max.	1.5V	
Total power dissipation	Typ.	1 ms	0.7 ms
	Max.	3 ms	3 ms
I/O isolation voltage	Typ.	0.11ms	0.05ms
	Max.	1 ms	1 ms
Initial I/O isolation resistance (Min.)		1,000MΩ	
Safety standards		UL/C-UL, VDE	
Mass (weight) (approx.)		4.3g	

Photovoltaic MOSFET Drivers Selector Chart





Product name		Photovoltaic MOSFET drivers		
Number of terminals		DIP 6pin	SOP 4pin	SSOP 4pin
Appearance configuration *Standoff height included		  		
mm				
Features		Photovoltaic MOSFET drivers of wide variation		
Part No.		APV1122	APV1121S	APV2121S
Output	Open voltage	Min.	6 V	5 V
		Typ.	8.7V	8.2V
Input	Short current	Min.	5µA	3µA
		Typ.	14µA	8µA
LED forward current		50mA		
LED reverse voltage		5V		
Peak forward current		1A		
Power dissipation		75mA		
LED operate current	Typ.	0.6mA		0.85mA
	Max.	3 mA		
LED turn off current	Min.	0.2mA		
	Typ.	0.5mA		0.75mA
LED dropout voltage	Typ.	1.15V		
	Max.	1.5 V		
Turn on time	Typ.	0.4ms		0.8ms
Turn off time	Typ.	0.1ms		
I/O capacitance	Typ.	0.8pF		
	Max.	1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ		
I/O isolation voltage		5,000Vrms	2,500Vrms	2,500Vrms
Safety standards		UL/C-UL, VDE		UL/C-UL
Mass (weight) (approx.)		0.45g	0.08g	0.06g

Phototriac Coupler Selector Chart


Product name	APT Phototriac Coupler													
Type	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random						
Number of terminals	SOP 4pin		DIP 4pin		DIP 6pin		DIP 6pin wide							
Type	0.05A		0.1A											
Appearance configuration *Standoff height included	 mm		 mm		 mm		 mm							
Features	Phototriac coupler ideal for triac driver with wide variation													
Part No.	APT1211S	APT1221S	APT1211	APT1221	APT1212	APT1222	APT1212W	APT1222W						
Output	Repetitive peak OFF-state voltage	600V												
	0.8A													
	0.7A													
	0.6A													
	0.5A													
	0.4A													
	0.3A													
Input	0.2A													
	0.1A	0.1A												
	Non-repetitive surge current	0.6A	1.2A											
	Peak ON-state voltage	Max. 2.5V												
	Peak OFF-state current	Max. 1µA												
	LED forward current	50mA												
	LED reverse voltage	6V												
	Peak forward current	1A												
	LED dropout voltage ($I_f=20mA$)	Max. 1.3V												
	Trigger LED current	Max. 10mA												
	Zero-cross voltage	Max. 50V	—	Max. 50V	—	Max. 50V	—	Max. 50V						
	Turn on time	Max. 0.1ms												
I/O isolation voltage		3,750Vrms	5,000Vrms											
I/O isolation resistance		Min. 50GΩ												
Safety standards		UL/C-UL, VDE*												
Mass (weight) (approx.)		0.08g	0.19g		0.45g	0.45g								

*Normal part number is taken UL/C-UL standards. About VDE standard, please contact our sales office.





Phototriac Coupler Selector Chart

Product name	APT Phototriac Coupler					
Type	Zero-cross (Low zero-cross type)					
Number of terminals	SOP 4pin	DIP 4pin	DIP 6pin	DIP 6pin wide		
Type	0.05A	0.1A				
Appearance configuration *Standoff height included	 mm					
Features	Phototriac coupler ideal for triac driver with wide variation					
Part No.	APT1231S	APT1231	APT1232	APT1232W		
Output	Repetitive peak OFF-state voltage	600V				
	0.8A					
	0.7A					
	0.6A					
	0.5A					
	0.4A					
	0.3A					
ON-state RMS current	0.2A					
	0.1A	0.05A	0.1A			
	Non-repetitive surge current	0.6A	1.2A			
Input	Peak ON-state voltage	Max. 2.0V				
	Peak OFF-state current	Max. 1µA				
	LED forward current	50mA				
	LED reverse voltage	6V				
	Peak forward current	1A				
	LED dropout voltage (If=20mA)	Max. 1.3V				
	Trigger LED current	Max. 10mA				
	Zero-cross voltage	Max. 15V				
	Turn on time	Max. 0.1ms				
	I/O isolation voltage	3,750Vrms	5,000Vrms			
	I/O isolation resistance	Min. 50GΩ				
	Safety standards	UL/C-UL, VDE*				
Mass (weight) (approx.)		0.08g	0.19g	0.45g		
*Normal part number is taken UL/C-UL standards. About VDE standard, please contact our sales office.						

Solid State Relays Selector Chart

Product name	AQ-H Relays								
Type	Phototriac								
Number of terminals	DIP 8pin								
Type	0.3A	0.6A	0.9A	1.2A					
Appearance configuration *Standoff height included									
mm									
Features	Compact DIP type SSR Ideal for AC load control								
Part No.	AQH0213	AQH0223	AQH1213	AQH1223	AQH2213	AQH2223	AQH3213	AQH3223	
Output	Repetitive peak OFF-state voltage	600V							
	ON-state RNS current	2A							
		1.5A							
		1A							
		0.9A							
		0.8A							
		0.7A							
Input	Non-repetitive surge current	0.3A	0.6A	0.9A	1.2A				
	Peak ON-state voltage	Max. 2.5V							
	Peak OFF-state current	Max. 100µA							
	LED forward current	50mA							
	LED reverse voltage	6V							
	Peak forward current	1A							
	LED dropout voltage (If=20mA)	Max. 1.3V							
Trigger LED current	Max. 10mA								
Zero-cross voltage	Max. 50V	—	Max. 50V	—	Max. 50V	—	Max. 50V	—	
Turn on time	Max. 0.1ms								
I/O isolation voltage	5,000Vrms								
I/O capacitance, Typ.	2.1pF								
I/O isolation resistance	Min. 50GΩ								
Safety standards	UL/C-UL, VDE								
Mass (weight) (approx.)	0.56g								





Solid State Relays Selector Chart

Product name		AQ-G Relays																	
Type	Zero-cross					Random													
Number of terminals	4pin																		
Type	1A			2A			1A			2A									
Appearance configuration *Standoff height included																			
mm																			
Features	Slim type SSR for 1A and 2A control																		
Part No.	AQG12105	AQG12112	AQG12124	AQG22105	AQG22112	AQG22124	AQG12205	AQG12212	AQG12224	AQG22205	AQG22212	AQG22224							
Load side	Load voltage	AC	75 to 264V																
		DC	—																
	Max. load current	20A	—																
		15A	—																
		10A	—																
		8A	—																
		5A	—																
		3A	—																
		2A	—																
		1A	—																
		1A	—																
Input side	Off state leakage current, max.	1.5mA (applied 200V)																	
	Non-repetitive surge current	8A			30A			8A			30A								
	Control voltage	4 to 6V	9.6 to 14.4V	19.2 to 28.8V	4 to 6V	9.6 to 14.4V	19.2 to 28.8V	4 to 6V	9.6 to 14.4V	19.2 to 28.8V	4 to 6V	9.6 to 14.4V	19.2 to 28.8V						
	Input impedance, approx.	0.3kΩ	0.8kΩ	1.6kΩ	0.3kΩ	0.8kΩ	1.6kΩ	0.3kΩ	0.8kΩ	1.6kΩ	0.3kΩ	0.8kΩ	1.6kΩ						
	Pick-up voltage, max.	4V	9.6V	19.2V	4V	9.6V	19.2V	4V	9.6V	19.2V	4V	9.6V	19.2V						
	Drop-out voltage, min.	1V																	
	Operate time, max.	1/2 cycle of voltage sine wave + 1ms					1ms												
	Release time, max.	1/2 cycle of voltage sine wave + 1ms																	
	Breakdown voltage	3,000Vrms																	
	Snubber circuit integrated	•																	
	LED operation indicator	—																	
	Safety standards	UL/C-UL, VDE																	
	Mass (weight) (approx.)	2.7g			4.3g			2.7g			4.3g								


Product name		AQ1 Relays					
Type	Zero-cross*						
Number of terminals	4pin						
Type	3A		10A				
Appearance configuration *Standoff height included mm							
Features	High capacity up to 10A PCB terminal type SSR						
Part No.		AQ1298	AQ1398	AQ1208			
Load side	Load voltage	AC	75 to 250V				
		DC	—				
Load side	Max. load current	20A	—				
		15A	—				
		10A	(Heat sink/Panel heat) 10A				
		8A	—				
		5A	—				
		3A	—				
		2A	—				
		1A	—				
	Off state leakage current, max.	5mA					
	Non-repetitive surge current	80A		100A			
Input side	Control voltage	4 to 32V DC					
	Input impedance, approx.	—					
	Pick-up voltage, max.	4 V					
	Drop-out voltage, min.	1.0V					
Operate time, max.	1/2 cycle of voltage sine wave + 1ms						
Release time, max.	1/2 cycle of voltage sine wave + 1ms						
Breakdown voltage	4,000 Vrms (between input and output) 2,500Vrms (between input, output and case)						
Snubber circuit integrated	•						
LED operation indicator	—						
Safety standards	UL/C-UL, VDE						
Mass (weight) (approx.)	19g		26g				

*Random type is also available by custom order.

Solid State Relays Selector Chart

Product name		AQ8 Relays																													
Type		Zero-cross						Random																							
Number of terminals		4pin																													
Type		2A			3A			2A			3A																				
Appearance configuration *Standoff height included																															
mm																															
Features		SIL type SSR with 9mm thickness controls up to 3A																													
Part No.	Input terminal distance: 5.08mm		AQ80139	AQ80133	AQ80134	AQ80159	AQ80153	AQ80154	AQ80239	AQ80233	AQ80234	AQ80259	AQ80253	AQ80254																	
	Input terminal distance: 7.62mm		AQ81139	AQ81133	AQ81134	AQ81159	AQ81153	AQ81154	AQ81239	AQ81233	AQ81234	AQ81259	AQ81253	AQ81254																	
Load side	Load voltage	AC	75 to 250V																												
		DC	—																												
	Max. load current	20A																													
		15A																													
		10A																													
		8A																													
		5A																													
		3A																													
Off state leakage current, max.	2A																														
	3A																														
	2A																														
	3A																														
	2A																														
Input side	30A		80A				30A				80A																				
	Control voltage		4 to 6V	9.6 to 14.4V	21.6 to 26.4V	4 to 6V	9.6 to 14.4V	21.6 to 26.4V	4 to 6V	9.6 to 14.4V	21.6 to 26.4V	4 to 6V	9.6 to 14.4V	21.6 to 26.4V																	
	Input impedance, approx.		0.18kΩ	0.55kΩ	1.4kΩ	0.18kΩ	0.55kΩ	1.4kΩ	0.3kΩ	0.8kΩ	1.8kΩ	0.3kΩ	0.8kΩ	1.8kΩ																	
	Pick-up voltage, max.		4 V	9.6V	21.6V	4 V	9.6V	21.6V	4 V	9.6V	21.6V	4 V	9.6V	21.6V																	
	Drop-out voltage, min.		0.5V	1.2V	2.4V	0.5V	1.2V	2.4V	0.5V	1.2V	2.4V	0.5V	1.2V	2.4V																	
	Operate time, max.		1/2 cycle of voltage sine wave + 1ms						1ms																						
	Release time, max.		1/2 cycle of voltage sine wave + 1ms																												
	Breakdown voltage		3,000Vrms																												
Snubber circuit integrated		•																													
LED operation indicator		—																													
Safety standards		UL, CSA, TÜV*																													
Mass (weight) (approx.)		6.8g			9.8g			6.8g			9.8g																				



*Normal part number is taken UL, CSA standards. About TÜV standard, please contact our sales office.

Product name		AQ-J Relays														
Type	Zero-cross ¹															
Number of terminals	4															
Type	10A			15A			25A									
Appearance configuration *Standoff height included	 mm									Input terminal: #110 type Output terminal: #250 type						
Features	Load current 10 to 25A Small Tab Terminal SSR															
Part No.			AQJ112V	AQJ119V	AQJ116V	AQJ212V	AQJ219V	AQJ216V	AQJ412V	AQJ419V	AQJ416V					
Load side	Load voltage	AC	75 to 264V													
		DC	—													
	Max. load current	40A	*4 (Heat sink) 25A													
		25A	*3 (Heat sink/Panel heat) 15A													
		20A	*3 (Heat sink/Panel heat) 15A													
		15A	*2 (Heat sink/Panel heat) 10A													
		10A	10A													
		5A	15A													
		2A	15A													
		1A	15A													
Input side	Off state leakage current, max.	5mA														
	Non-repetitive surge current	100A			150A			250A								
	Control voltage	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V						
	Input impedance, approx.	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ						
	Pick-up voltage, max.	4V	10V	18V	4V	10V	18V	4V	10V	18V						
	Drop-out voltage, min.	1V														
Operate time, max.		1/2 cycle of voltage sine wave + 1ms														
Release time, max.		1/2 cycle of voltage sine wave + 1ms														
Breakdown voltage		3,000Vrms between input and output 2,500Vrms between input, output and case														
Snubber circuit integrated		•														
LED operation indicator		—														
Safety standards		UL/C-UL, TÜV														
Mass (weight) (approx.)		30g														



*1 Random type is available by custom order. *2 When mounting a standard heat sink (AQP-HS-J10A) or when mounting on 100 × 100 × t1.6 (mm) iron plate

*3 When mounting a standard heat sink (AQP-HS-J10A) or when mounting on 200 × 200 × t2 (mm) iron plate *4 When mounting a standard heat sink (AQP-HS-J25A)

Solid State Relays Selector Chart

Product name		AQ-J Relays												
Type	Zero-cross*													
Number of terminals	4						4×2							
Type	10A (Output arrangement: 1a)			20A (Output arrangement: 1a)			10A (Output arrangement: 1a × 2)			15A (Output arrangement: 1a × 2)				
Appearance configuration *Standoff height included mm														
Features	Load current 10 to 25A Small Tab Terminal SSR													
Part No.	AQJ112VY	AQJ119VY	AQJ116VY	AQJ412VY	AQJ419VY	AQJ416VY	AQJ112VW	AQJ119VW	AQJ116VW	AQJ412VW	AQJ419VW	AQJ416VW		
Load side	Load voltage	AC	75 to 264V											
		DC	—											
Max. load current	40A													
	25A													
	20A													
	15A													
	10A													
	5A													
	2A													
	1A													
Input side	Off state leakage current, max.	5mA												
	Non-repetitive surge current	100A			250A			100A			250A			
Control voltage	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V		
Input impedance, approx.	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ		
Pick-up voltage, max.	4V	10V	18V	4V	10V	18V	4V	10V	18V	4V	10V	18V		
Drop-out voltage, min.	1V													
Operate time, max.	1/2 cycle of voltage sine wave + 1ms													
Release time, max.	1/2 cycle of voltage sine wave + 1ms													
Breakdown voltage	3,000Vrms between input and output 2,500Vrms between input, output and case													
Snubber circuit integrated	•													
LED operation indicator	—													
Safety standards	—													
Mass (weight) (approx.)	250g						280g							



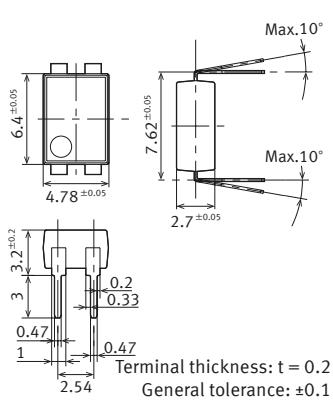
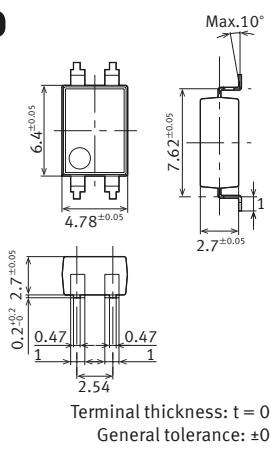


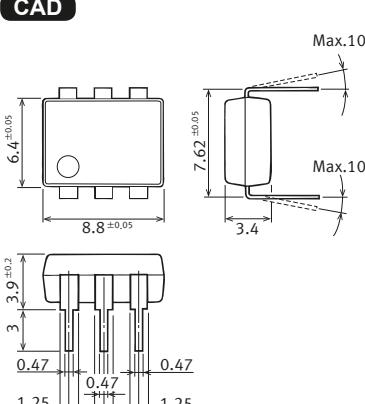
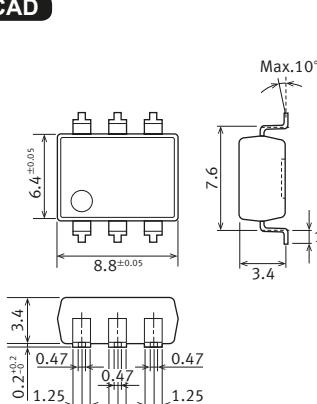


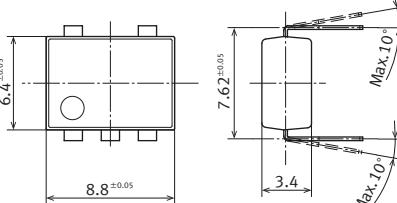

*Random type is available by custom order.

Product name		AQ-A Relays (AC output type)			AQ-A Relays (DC output type)			
Type	Zero-cross ^{*1}			—				
Number of terminals	4							
Type	15A	25A	40A	30A	—	10A		
Appearance configuration *Standoff height included								
mm								
Features	Load current 15 to 40A Small Screw Terminal SSR							
Part No.	AQA211VL	AQA411VL	AQA611VL	AQA551DL	AQA171DL			
Load side	Load voltage	AC	75 to 250V			—		
		DC	—			100V		
			40A			600V		
			*4 (Heat sink) 40A					
			35A					
			30A			*5 (Heat sink) 30A		
			*3 (Heat sink) 25A			*6 (Heat sink) 10A		
Input side	Max. load current	40A	35A	30A	25A	20A		
		25A	20A	15A	10A	5A		
		15A	10A	5A	—	—		
		*2 (Heat sink) 15A	—	—	—	—		
Off state leakage current, max.	10mA			100µA				
Non-repetitive surge current	150A	250A	400A	—	—			
Peak load current	—	—	—	90A (100ms)	20A (100ms)			
Control voltage	4 to 32V							
Input impedance, approx.	—							
Pick-up voltage, max.	4V							
Drop-out voltage, min.	1V							
Operate time, max.	1/2 cycle of voltage sine wave + 1ms			10ms	5ms			
Release time, max.	1/2 cycle of voltage sine wave + 1ms			3ms	1ms			
Breakdown voltage	4,000 Vrms between input and output/2,500Vrms between input, output and case							
Snubber circuit integrated	•			—				
Reverse connection prevention diode	—			•				
LED operation indicator	•							
Safety standards	UL/C-UL, VDE			UL/C-UL, VDE				
Mass (weight) (approx.)	70g							

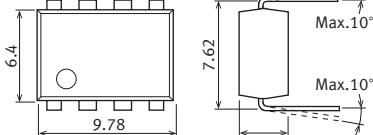





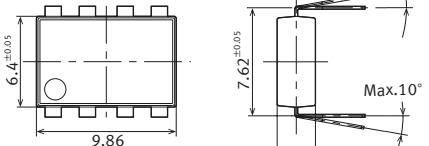



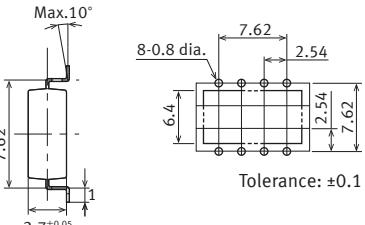

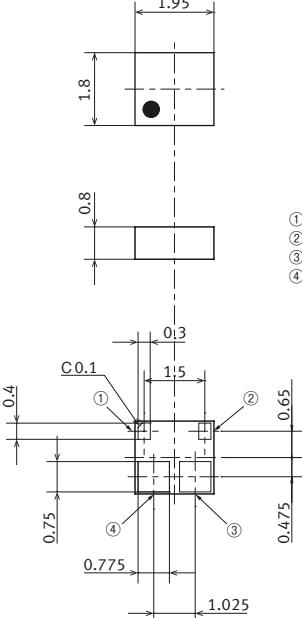

*1 Random type is available by custom order. *2 When mounting a standard heat sink (AQP-HS-J10A or AQP-HS-SJ20A) *3 When mounting a standard heat sink (AQP-HS-30/40A)

*4 When mounting a standard heat sink (AQP-HS-J25A) *5 When mounting a standard heat sink (AQP-HS-J25A) *6 When mounting a standard heat sink (AQP-HS-SJ20A)

PhotoMOS® Dimensions

Type	Dimensions (mm)		
AQY21 (DIP) AQY41 (DIP) Series	 CAD  CAD  Tolerance: ±0.1  Tolerance: ±0.1	<p>Through hole terminal type</p>  <p>Surface mount terminal type</p>  <p>PC board pattern (Bottom view)</p> <p>Recommended mounting pad (Top view)</p>	<p>General tolerance: ±0.1</p> <p>Terminal thickness: t = 0.2</p> <p>General tolerance: ±0.1</p> <p>Terminal thickness: t = 0.2</p> <p>General tolerance: ±0.1</p>
AQV10 (DIP) AQV11 (DIP) AQV20 (DIP) AQV21 (DIP) AQV22 (DIP) AQV23 (DIP) AQV25 (DIP) AQV41 (DIP) AQV45 (DIP) Series	 CAD  CAD  Tolerance: ±0.1  Tolerance: ±0.1	<p>Through hole terminal type</p>  <p>Surface mount terminal type</p>  <p>PC board pattern (Bottom view)</p> <p>Recommended mounting pad (Top view)</p>	<p>General tolerance: ±0.1</p> <p>Terminal thickness: t = 0.25</p> <p>General tolerance: ±0.1</p> <p>General tolerance: ±0.1</p> <p>Terminal thickness: t = 0.25</p> <p>General tolerance: ±0.1</p>
AQV258H5 (DIP) AQV1122 (DIP)	 CAD  CAD  Tolerance: ±0.1  Tolerance: ±0.1	<p>Through hole terminal type</p>  <p>Surface mount terminal type</p>  <p>PC board pattern (Bottom view)</p> <p>Recommended mounting pad (Top view)</p>	<p>General tolerance: ±0.1</p> <p>Terminal thickness: t = 0.25</p> <p>General tolerance: ±0.1</p> <p>General tolerance: ±0.1</p> <p>Terminal thickness: t = 0.25</p> <p>General tolerance: ±0.1</p>






CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Type	Dimensions (mm)			
AQW21 (DIP) AQW22 (DIP) AQW25 (DIP) AQW41 (DIP) AQW45 (DIP) AQW61 (DIP) AQW65 (DIP) Series	 CAD   <p>Terminal thickness: t = 0.25 General tolerance: ± 0.1</p>  CAD   <p>Terminal thickness: t = 0.25 General tolerance: ± 0.1</p>  <p>Tolerance: ± 0.1</p>  <p>Tolerance: ± 0.1</p>			
AQW21*EH (DIP) AQW21*HL (DIP) AQW41*EH (DIP) AQW61*EH (DIP) Series	 CAD   <p>Terminal thickness: t = 0.2 General tolerance: ± 0.1</p>  CAD   <p>Terminal thickness: t = 0.2 General tolerance: ± 0.1</p>  <p>Tolerance: ± 0.1</p>  <p>Tolerance: ± 0.1</p>			
AQY2C (TSOn) Series	 CAD  <p>① Input: DC+ ② Input: DC- ③ Output: AC/DC ④ Output: AC/DC</p> <p>General tolerance: ± 0.2</p>  <p>General tolerance: ± 0.2</p>			



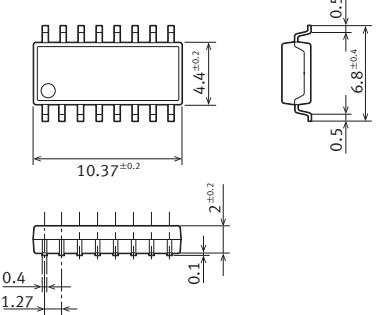

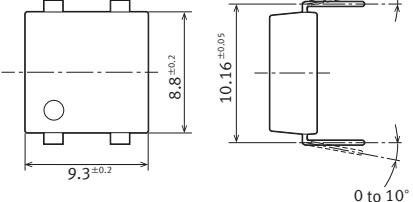



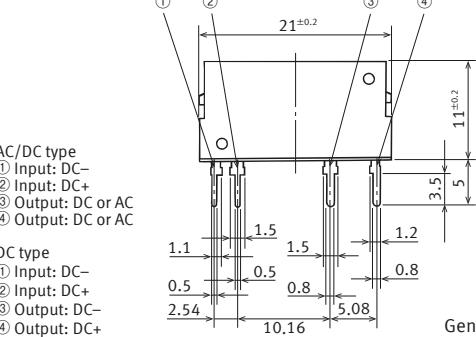
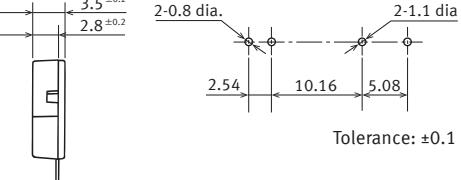
*Stand for one digit.

CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

PhotoMOS® Dimensions

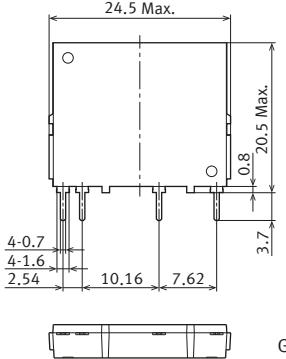


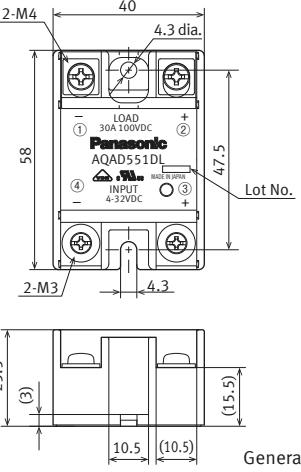

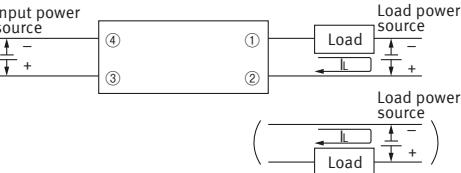

Type	Dimensions (mm)			
AQY22 (VSSOP) Series	 CAD  <p>① Input: DC+ ② Input: DC- ③ Output: AC/DC ④ Output: AC/DC</p> <p>General tolerance: ± 0.1</p>	2.1	1.8	2.9
		0.4	0.4	1.27
		0.2	(2.2)	0.2
AQY22 (SON) Series	 CAD  <p>① Input: DC+ ② Input: DC- ③ Output: AC/DC ④ Output: AC/DC</p> <p>General tolerance: ± 0.2</p>	2.95	2.2	1.4
		0.6	0.6	0.6
		0.6	1.27	0.4
APV21 (SSOP) AQY22 (SSOP) Series	 CAD  <p>Terminal thickness: $t = 0.15$ General tolerance: ± 0.1</p>	4.45	2.65	1.8
		0.2	0.2	0.2
		0.4	1.27	0.4
APV11 (SOP) APV21 (SOP) AQY21 (SOP) AQY22 (SOP) AQY23 (SOP) AQY41 (SOP) Series	 CAD  <p>Terminal thickness: $t = 0.15$ General tolerance: ± 0.1</p>	4.4 ^{+0.2}	4.3 ^{+0.2}	2 ^{+0.2}
		0.4	0.4	0.1
		2.54	2.54	2.54
AQV21 (SOP) AQV22 (SOP) AQV25 (SOP) AQV41 (SOP) Series	 CAD  <p>Terminal thickness: $t = 0.15$ General tolerance: ± 0.1</p>	6.3 ^{+0.2}	4.4 ^{+0.2}	2 ^{+0.2}
		0.4	0.4	0.1
		2.54	2.54	2.54

CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Type	Dimensions (mm)		
AQW21 (SOP) AQW22 (SOP) AQW41 (SOP) AQW61 (SOP) Series	 CAD  <p>Terminal thickness: $t = 0.15$ General tolerance: ± 0.1</p>  <p>Tolerance: ± 0.1</p>		
AQS22 (SOP) Series	 CAD  <p>Terminal thickness: $t = 0.15$ General tolerance: ± 0.1</p>  <p>Tolerance: ± 0.1</p>		
AQY27 (Power-DIP) Series	 CAD <p>Through hole terminal type</p>  <p>Terminal thickness: $t = 0.25$ General tolerance: ± 0.1</p> <p>Surface mount terminal type</p>  <p>Terminal thickness: $t = 0.25$ General tolerance: ± 0.1</p> <p>PC board pattern (Bottom view)</p>  <p>Tolerance: ± 0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ± 0.1</p>		
AQZ10 (SIL) AQZ20 (SIL) AQZ40 (SIL) Series	 CAD <p>AC/DC type</p> <ul style="list-style-type: none"> ① Input: DC- ② Input: DC+ ③ Output: DC or AC ④ Output: DC or AC <p>DC type</p> <ul style="list-style-type: none"> ① Input: DC- ② Input: DC+ ③ Output: DC- ④ Output: DC+  <p>General tolerance: ± 0.1</p> <p>PC board pattern (Bottom view)</p>  <p>Tolerance: ± 0.1</p>		



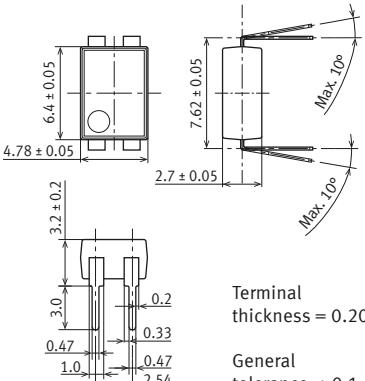
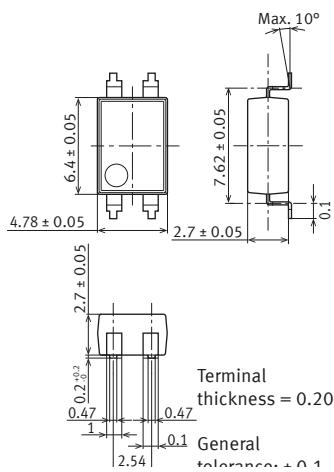


CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

PhotoMOS® Dimensions

Type	Dimensions (mm)		PC board pattern (Bottom view)	Schematic
AQY19 (SIL) Series	 CAD	   General tolerance: ±0.2	 Tolerance: ±0.1	
AQAD Series	 CAD	  General tolerance: ±1.0		



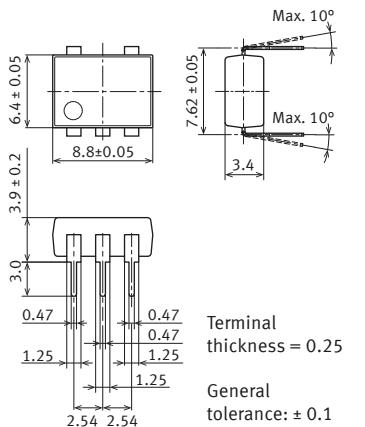
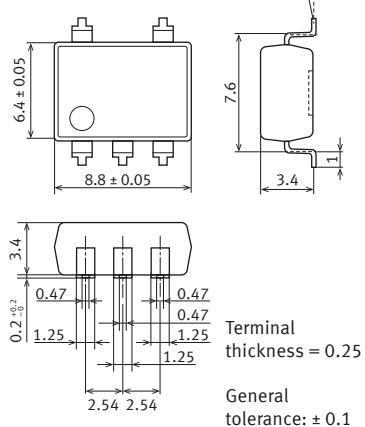



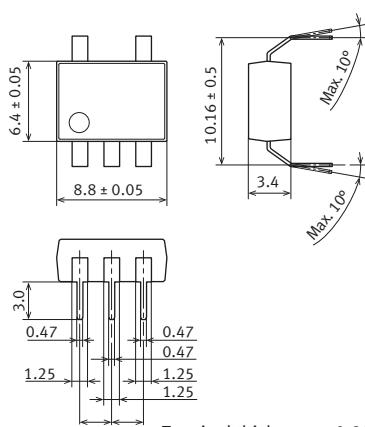
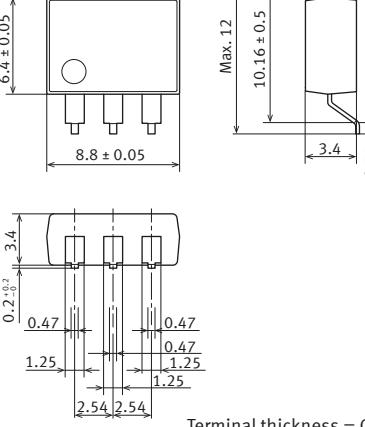

CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Phototriac Coupler Dimensions

Type	Dimensions (mm)					
APT1211S (SOP) APT1221S (SOP) APT1231S (SOP) Series	 CAD	 <p>Terminal thickness = 0.15 General tolerance: ± 0.1</p>	<p>Recommended mounting pad (TOP VIEW)</p>  <p>Tolerance: ± 0.1</p>			
APT1211 (A) (DIP4) APT1221 (A) (DIP4) APT1231 (A) (DIP4) Series	 CAD	<p>Through hole terminal type</p>  <p>Terminal thickness = 0.20 General tolerance: ± 0.1</p>	 CAD	<p>Surface mount terminal type</p>  <p>Terminal thickness = 0.20 General tolerance: ± 0.1</p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ± 0.1</p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ± 0.1</p>

CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Phototriac Coupler Dimensions

Type	Dimensions (mm)		
APT1212 (A) (DIP6) APT1222 (A) (DIP6) APT1232 (A) (DIP6) Series	 CAD  CAD  PC board pattern (Bottom view)  Recommended mounting pad (Top view) <p>Terminal thickness = 0.25 General tolerance: ± 0.1</p>	 	 Tolerance: ± 0.1
APT1212W (A) (DIP6WIDE) APT1222W (A) (DIP6WIDE) APT1232W (A) (DIP6WIDE) Series	 CAD  CAD  PC board pattern (Bottom view)  Recommended mounting pad (Top view) <p>Terminal thickness = 0.25 General tolerance: ± 0.1</p>	 	 Tolerance: ± 0.1

CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Please refer to "**the latest product specifications**"
when designing your product.
•Requests to customers:
<https://industrial.panasonic.com/ac/e/salespolicies/>

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.
*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2020