

AC-DC DIN Rail Mount Power Supply 120W

multicompPRO

**RoHS
Compliant**

Features

- Universal 85 - 264VAC or 120 - 370 VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +70°C
- High efficiency up to 94%, high reliability
- DC OK function
- Active PFC
- 150% peak load output for 3 seconds
- DC ON output status indicator LED
- Output short circuit, over-current, over-voltage,
- over-temperature protection
- Safety according to IEC/EN/UL62368, UL61010, UL508

These AC-DC converter series featuring a cost-effective, energy efficient explosion-proof solution for standard DIN-rail mounting. The products offer a high level of stability and immunity to noise, compliant with international IEC62368 standards for EMC and safety specifications meet IEC/EN/UL62368, UL61010, UL508. These light weight AC-DC converters also have an extremely compact design for space saving and are ideal for applications such as industrial control equipment, machinery, and all kinds of applications in a harsh environments.

Selection Guide

Part Number	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
MPIF120-10B12	120	12V/10A	11.8-14.0	93.5	80.000
MPIF120-10B24		24V/5A	23.5-28.0	94	50.000
MPIF120-10B48		48V/2.5A	47.0-53.0	94	30.000

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	Rated input	100	--	240	V AC
	AC input	85		264	
	DC input	120		370	V DC
Input Frequency	AC input	47	--	63	Hz
Input Current	115V AC	--	--	1.5	A
	230V AC	--	--	0.75	
Inrush Current	115V AC	--	15	--	
	230V AC	--	30	--	
Power Factor	115V AC	--	0.98	--	--
	230V AC	--	0.94	--	
Start-up Delay Time	230V AC	--	300	1000	ms
Leakage Current	240V AC	<1mA			
Hot Plug		Unavailable			

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

AC-DC DIN Rail Mount Power Supply 120W





multicompPRO

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range		--	±1	--	%
Line Regulat	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load		--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-peak value)	12V	--	--	100	mV
		24V	--	--	100	
		48V	--	--	200	
Stand-by Power Consumption			--	2	--	W
Hold-up Time			--	20	--	ms
DC OK Signal*			30V DC/1A Max.			
Short Circuit Protection	Recovery time < 10s after the short circuit disappear.		Constant current hiccup mode (constant current mode works 1s and stop 10s) continuous, self-recovery			
Over-current Protection	230V AC, rated load	Normal temperature, high temperature	105% - 200% Io, self-recovery			
		Low temperature	≥105% full load after derating, self-recovery			
Over-voltage Protection	12V		≤18V (Hiccup, self-recovery after the abnormality is removed)			
	24V		≤35V (Hiccup, self-recovery after the abnormality is removed)			
	48V		≤60V (Hiccup, self-recovery after the abnormality is removed)			
Over-temperature Protection	230VAC, 70% load	Over-temperature protection start	--	90	--	°C
		Over-temperature protection release	60	--	--	

AC-DC DIN Rail Mount Power Supply 120W

multicompPRO

General Specifications								
Item		Operating Conditions		Min.	Typ.	Max.	Unit	
Isolation Test	Input - 	Electric strength test for 1min., leakage current <15mA		1500	--	--	VAC	
	Input - output			3000	--	--		
	Output - 			500	--	--		
Insulation Resistance	Input - 	At 500V DC		50	--	--	MΩ	
	Input - output			50	--	--		
	Output - 			50	--	--		
Operating Temperature				-40	--	+70	°C	
Storage Temperature				-40	--	+85		
Operating Humidity		Non-condensing		--	--	95	%RH	
Storage Humidity				20	--	95		
Switching Frequency				--	100	--	kHz	
Power Derating		Operating temperature derating	-40°C to -25°C					% / °C
			+55°C to +70°C	85VAC-164VAC	2		--	
			+60°C to +70°C	165VAC-264VAC	2		--	
		Input voltage derating		85VAC-100VAC	1		--	%/VAC
Safety Standard				Meet IEC/EN/UL62368/UL61010/UL508				
Safety Certification				EN62368/UL61010 (Pending)				
Safety Class				CLASS I				
MTBF		MIL-HDBK-217F@25°C		>300,000 h				

Mechanical Specifications	
Case Material	Metal (AL1100, SPCC) and Plastic (PC940)
Dimensions	110.00 x 32.00 x 124.00mm
Weight	490g±10% (Typ.)
Cooling Method	Free air convection

EMC Specifications

EMI	CE	CISPR32/EN55032 CLASS B			
	RE	CISPR32/EN55032 CLASS B			
	Harmonic current	IEC/EN61000-3-2 CLASS A and CLASS D			
EMS	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV		perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m		perf. Criteria A
	EFT	IEC/EN 61000-4-4	±4KV		perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line ±2KV/line to ground ±4KV		perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s		perf. Criteria A
	Voltage dips, short interruptions and voltage variations immu	IEC/EN61000-4-11	0%, 70%		perf. Criteria B



Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

AC-DC DIN Rail Mount Power Supply 120W



multicompPRO

Product Characteristic Curve




Note: 1. With an AC input voltage between 85-100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

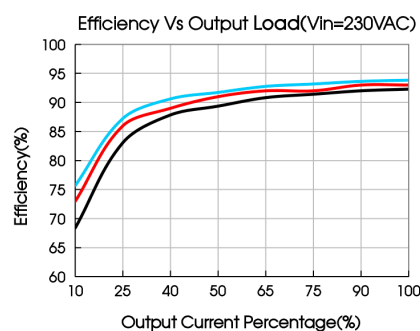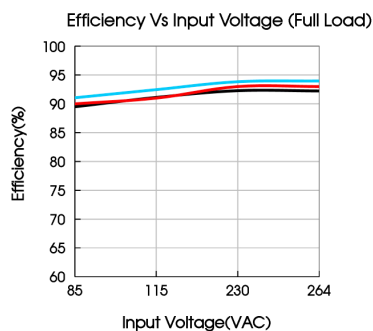

Dimensions and Recommended Layout

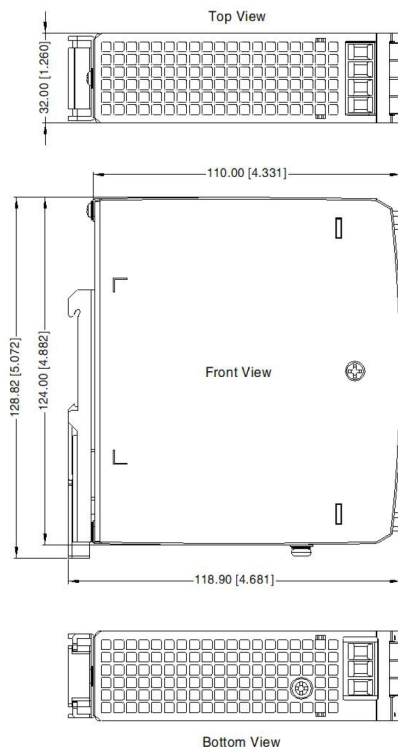

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	-Vo
2	-Vo
3	+Vo
4	+Vo
5	AC(N)
6	AC(L)
7	⊕

Note:

Unit: mm[inch]

DC ON: Output status indicator LED

ADJ: Output adjustable resistor

Wire range: 26-10 AWG

Tightening torque: Max 0.4 N-m

Mounting rail: TS35, rail needs to connect safety ground

General tolerances: $\pm 1.00 [\pm 0.039]$

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

AC-DC DIN Rail Mount Power Supply 120W

multicompPRO

Notes:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% RH with nominal input voltage and rated output load;
2. The room temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. The out case needs to be connected to the earth (\perp) of system when the terminal equipment in operating;
8. The output voltage can be adjusted by the output adjustable resistance ADJ, turn it down clockwise.

Part Number Table

Description	Part Number
AC-DC DIN Rail Mount Power Supply, 120W, 12V, 10A	MPIF120-10B12
AC-DC DIN Rail Mount Power Supply, 120W, 24V, 5A	MPIF120-10B24
AC-DC DIN Rail Mount Power Supply, 120W, 48V, 2.5A	MPIF120-10B48

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO