

## T8 Luxline Plus

F18w/T8/840 Syl-Retail

0000571



### Product features

- T8 Luxline Plus



## PRODUCT OVERVIEW

Product name	F18w/T8/840 Syl-Retail
Technology	Fluorescent
Watt (Rated) (W)	18.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
Luminous flux (lm)	1350
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	18.00
Product Voltage (V)	57
Dimmable	Yes
Average life (Nominal) (h)	20000
Product EAN number	5410288005713

## DATA TABLE

### General data

Product name	F18w/T8/840 Syl-Retail
Technology	Fluorescent
Watt (Rated) (W)	18.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer

## T8 Luxline Plus

F18w/T8/840 Syl-Retail  
0000571

ETIM Class EC000108

### Optical data

Luminous flux (lm)	1350
Luminous flux (Rated) (lm)	1350
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.96
Rated lumen maint. factor (%) at 4000 h 50Hz	0.94
Rated lumen maint. factor (%) at 6000 h 50Hz	0.92
Rated lumen maint. factor (%) at 8000 h 50Hz	0.91
Rated lumen maint. factor (%) at 12000 h 50Hz	0.90
Rated lumen maint. factor (%) at 16000 h 50Hz	0.89
Rated lumen maint. factor (%) at 20000 h 50Hz	0.87

### Electrical data

Wattage (W)	18.00
Watt (Rated) - High frequency (W)	16.00
Current (A)	0.370
Mains voltage (V)	220-240V~
Product Voltage (V)	57
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	370
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	22
Nominal Frequency (Hz)	50Hz

### Lifetime data

Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94

## T8 Luxline Plus

*F18w/T8/840 Syl-Retail*  
0000571

Rated survival factor (%) at 12000 h 50Hz	0.92
Rated survival factor (%) at 16000 h 50Hz	0.80
Rated survival factor (%) at 20000 h 50Hz	0.50

### Physical data

Nominal Product Length (mm)	600.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	589.8
Length base to pin Min-Max (mm) - B	594.5-596.9
Max. Lamp Length (mm) - C/L	604.0
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.082


### Packaging

Single packaging type	Carton
Product EAN number	5410288005713
Packaging single length / height (cm)	67.1
Packaging single width (cm)	2.7
Packaging single depth (cm)	2.7
DUN14 (outer)	15410288005710
Units per outer package	10
Packaging outer length / height (cm)	70.1
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	14.7

### Safety data


Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

## PHOTOMETRY

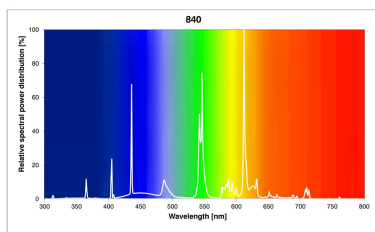


## TECHNICAL DRAWINGS

T8 Luxline Plus  
F18w/T8/840 Syl-Retail  
0000571



0000571

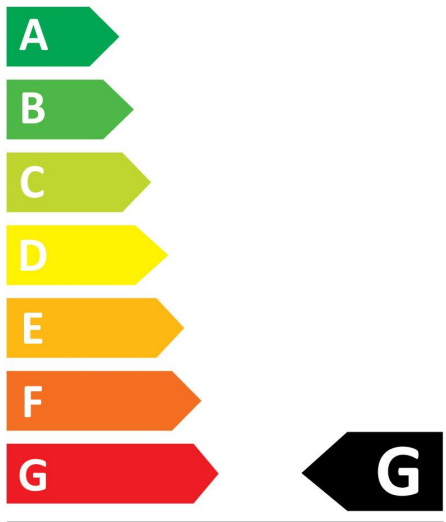

**18**  
kWh/1000h




2019/2015

T8 Luxline Plus  
F18w/T8/840 Syl-Retail  
0000571



0000571

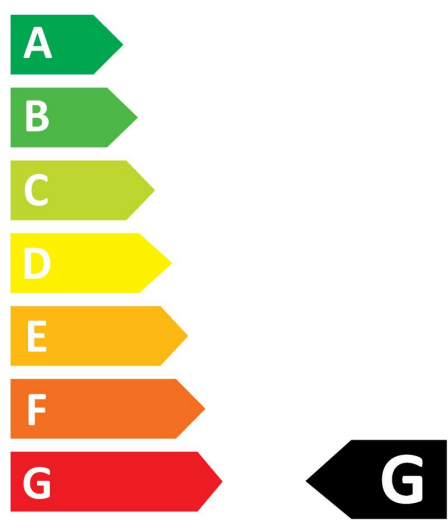

**18**  
kWh/1000h

