


## EasyPACK™ 2B module with Trench/Fieldstop IGBT H3 and rapid diode and PressFIT / NTC

### Features

- Electrical features
  - $V_{CES} = 650\text{ V}$
  - $I_{C\text{nom}} = 150\text{ A} / I_{CRM} = 300\text{ A}$
  - Increased blocking voltage capability up to 650 V
  - Low inductive design
  - Low switching losses
  - Low  $V_{CE,\text{sat}}$
- Mechanical features
  - $\text{Al}_2\text{O}_3$  substrate with low thermal resistance
  - Compact design
  - PressFIT contact technology
  - Rugged mounting due to integrated mounting clamps

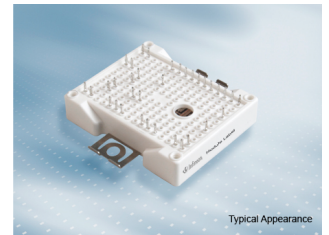


### Potential applications

- Three-level applications
- Motor drives
- Solar applications

### Product validation

- Qualified for industrial applications according to the relevant tests of IEC 60747, 60749 and 60068

### Description

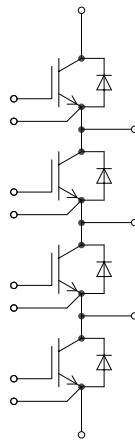

## Table of contents

	<b>Description</b> .....	1
	<b>Features</b> .....	1
	<b>Potential applications</b> .....	1
	<b>Product validation</b> .....	1
	<b>Table of contents</b> .....	2
<b>1</b>	<b>Package</b> .....	3
<b>2</b>	<b>IGBT, T1 / T4</b> .....	3
<b>3</b>	<b>Diode, D1 / D4</b> .....	5
<b>4</b>	<b>IGBT, T2 / T3</b> .....	5
<b>5</b>	<b>Diode, D2 / D3</b> .....	7
<b>6</b>	<b>NTC-Thermistor</b> .....	8
<b>7</b>	<b>Characteristics diagrams</b> .....	9
<b>8</b>	<b>Circuit diagram</b> .....	16
<b>9</b>	<b>Package outlines</b> .....	17
<b>10</b>	<b>Module label code</b> .....	18
	<b>Revision history</b> .....	19
	<b>Disclaimer</b> .....	20

## 1 Package

**Table 1** Insulation coordination

Parameter	Symbol	Note or test condition	Values	Unit
Isolation test voltage	$V_{ISOL}$	RMS, $f = 50$ Hz, $t = 1$ min	3.0	kV
Internal isolation		basic insulation (class 1, IEC 61140)	$Al_2O_3$	
Creepage distance	$d_{Creep}$	terminal to heatsink	11.5	mm
Creepage distance	$d_{Creep}$	terminal to terminal	6.3	mm
Clearance	$d_{Clear}$	terminal to heatsink	10.0	mm
Clearance	$d_{Clear}$	terminal to terminal	5.0	mm
Comparative tracking index	$CTI$		> 200	
Relative thermal index (electrical)	$RTI$	housing	140	°C

**Table 2** Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Stray inductance module	$L_{SCE}$			38		nH
Storage temperature	$T_{stg}$		-40		125	°C
Mounting force per clamp	$F$		40		80	N
Weight	$G$			39		g

Note: The current under continuous operation is limited to 25A rms per connector pin.

## 2 IGBT, T1 / T4

**Table 3** Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	$V_{CES}$		$T_{vj} = 25$ °C	650	V
Implemented collector current	$I_{CN}$			50	A
Continuous DC collector current	$I_{CDC}$	$T_{vj\ max} = 175$ °C	$T_H = 65$ °C	40	A
Repetitive peak collector current	$I_{CRM}$	$t_p = 1$ ms		100	A
Gate-emitter peak voltage	$V_{GES}$			±20	V

**Table 4** Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit	
			Min.	Typ.	Max.		
Collector-emitter saturation voltage	$V_{CE\ sat}$	$I_C = 50\ A, V_{GE} = 15\ V$	$T_{vj} = 25\ ^\circ C$		1.68	2.00	V
			$T_{vj} = 125\ ^\circ C$		1.86		
			$T_{vj} = 150\ ^\circ C$		1.89		
Gate threshold voltage	$V_{GEth}$	$I_C = 0.8\ mA, V_{CE} = V_{GE}, T_{vj} = 25\ ^\circ C$		5.05	5.75	6.45	V
Gate charge	$Q_G$	$V_{GE} = \pm 15\ V, V_{CE} = 400\ V$			0.5		$\mu C$
Internal gate resistor	$R_{Gint}$	$T_{vj} = 25\ ^\circ C$			0		$\Omega$
Input capacitance	$C_{ies}$	$f = 100\ kHz, T_{vj} = 25\ ^\circ C, V_{CE} = 650\ V, V_{GE} = 0\ V$			2.95		nF
Reverse transfer capacitance	$C_{res}$	$f = 100\ kHz, T_{vj} = 25\ ^\circ C, V_{CE} = 650\ V, V_{GE} = 0\ V$			0.096		nF
Collector-emitter cut-off current	$I_{CES}$	$V_{CE} = 650\ V, V_{GE} = 0\ V$	$T_{vj} = 25\ ^\circ C$			0.026	mA
Gate-emitter leakage current	$I_{GES}$	$V_{CE} = 650\ V, V_{GE} = 0\ V, T_{vj} = 25\ ^\circ C$				100	nA
Turn-on delay time (inductive load)	$t_{don}$	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Gon} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.014		$\mu s$
			$T_{vj} = 125\ ^\circ C$		0.015		
			$T_{vj} = 150\ ^\circ C$		0.015		
Rise time (inductive load)	$t_r$	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Gon} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.008		$\mu s$
			$T_{vj} = 125\ ^\circ C$		0.010		
			$T_{vj} = 150\ ^\circ C$		0.011		
Turn-off delay time (inductive load)	$t_{doff}$	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Goff} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.124		$\mu s$
			$T_{vj} = 125\ ^\circ C$		0.147		
			$T_{vj} = 150\ ^\circ C$		0.150		
Fall time (inductive load)	$t_f$	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Goff} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.038		$\mu s$
			$T_{vj} = 125\ ^\circ C$		0.073		
			$T_{vj} = 150\ ^\circ C$		0.084		
Turn-on energy loss per pulse	$E_{on}$	$I_C = 50\ A, V_{CE} = 300\ V, L_\sigma = 35\ nH, V_{GE} = \pm 15\ V, R_{Gon} = 2.2\ \Omega, di/dt = 4100\ A/\mu s (T_{vj} = 150\ ^\circ C)$	$T_{vj} = 25\ ^\circ C$		0.244		mJ
			$T_{vj} = 125\ ^\circ C$		0.406		
			$T_{vj} = 150\ ^\circ C$		0.451		
Turn-off energy loss per pulse	$E_{off}$	$I_C = 50\ A, V_{CE} = 300\ V, L_\sigma = 35\ nH, V_{GE} = \pm 15\ V, R_{Goff} = 2.2\ \Omega, dv/dt = 5100\ V/\mu s (T_{vj} = 150\ ^\circ C)$	$T_{vj} = 25\ ^\circ C$		0.593		mJ
			$T_{vj} = 125\ ^\circ C$		0.94		
			$T_{vj} = 150\ ^\circ C$		1.06		
Thermal resistance, junction to heat sink	$R_{thJH}$	per IGBT			1.19		K/W
Temperature under switching conditions	$T_{vj\ op}$			-40		150	$^\circ C$

### 3 Diode, D1 / D4

**Table 5** Maximum rated values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Repetitive peak reverse voltage	$V_{RRM}$	$T_{vj} = 25\text{ °C}$		650		V
Continuous DC forward current	$I_F$			100		A
Repetitive peak forward current	$I_{FRM}$	$t_p = 1\text{ ms}$		200		A
$I^2t$ - value	$I^2t$	$V_R = 0\text{ V}, t_p = 10\text{ ms}$	$T_{vj} = 125\text{ °C}$	1660		$A^2s$
			$T_{vj} = 150\text{ °C}$	1530		

**Table 6** Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit	
			Min.	Typ.	Max.		
Forward voltage	$V_F$	$I_F = 100\text{ A}$	$T_{vj} = 25\text{ °C}$		1.65	2.15	V
			$T_{vj} = 125\text{ °C}$		1.55		
			$T_{vj} = 150\text{ °C}$		1.50		
Peak reverse recovery current	$I_{RM}$	$I_F = 100\text{ A}, V_R = 300\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 2700\text{ A}/\mu\text{s} (T_{vj} = 150\text{ °C})$	$T_{vj} = 25\text{ °C}$		48.6		A
			$T_{vj} = 125\text{ °C}$		63.8		
			$T_{vj} = 150\text{ °C}$		69.3		
Recovered charge	$Q_r$	$I_F = 100\text{ A}, V_R = 300\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 2700\text{ A}/\mu\text{s} (T_{vj} = 150\text{ °C})$	$T_{vj} = 25\text{ °C}$		2.38		$\mu\text{C}$
			$T_{vj} = 125\text{ °C}$		4.67		
			$T_{vj} = 150\text{ °C}$		5.45		
Reverse recovery energy	$E_{rec}$	$I_F = 100\text{ A}, V_R = 300\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 2700\text{ A}/\mu\text{s} (T_{vj} = 150\text{ °C})$	$T_{vj} = 25\text{ °C}$		0.398		mJ
			$T_{vj} = 125\text{ °C}$		0.822		
			$T_{vj} = 150\text{ °C}$		0.984		
Thermal resistance, junction to heat sink	$R_{thJH}$	per diode		1.02		K/W	
Temperature under switching conditions	$T_{vj\text{ op}}$		-40		150	$^{\circ}\text{C}$	

### 4 IGBT, T2 / T3

**Table 7** Maximum rated values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter voltage	$V_{CES}$	$T_{vj} = 25\text{ °C}$		650		V

(table continues...)

**Table 7 (continued) Maximum rated values**

Parameter	Symbol	Note or test condition	Values	Unit
Implemented collector current	$I_{CN}$		150	A
Continuous DC collector current	$I_{CDC}$	$T_{vj\ max} = 175\ ^\circ\text{C}$ $T_H = 65\ ^\circ\text{C}$	90	A
Repetitive peak collector current	$I_{CRM}$	$t_p = 1\ \text{ms}$	300	A
Gate-emitter peak voltage	$V_{GES}$		$\pm 20$	V

**Table 8 Characteristic values**

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\ sat}$	$I_C = 150\ \text{A}, V_{GE} = 15\ \text{V}$	$T_{vj} = 25\ ^\circ\text{C}$	1.68	2.00	V
			$T_{vj} = 125\ ^\circ\text{C}$	1.86		
			$T_{vj} = 150\ ^\circ\text{C}$	1.89		
Gate threshold voltage	$V_{GEth}$	$I_C = 2.4\ \text{mA}, V_{CE} = V_{GE}, T_{vj} = 25\ ^\circ\text{C}$	5.05	5.75	6.45	V
Gate charge	$Q_G$	$V_{GE} = \pm 15\ \text{V}, V_{CE} = 400\ \text{V}$		1.6		$\mu\text{C}$
Internal gate resistor	$R_{Gint}$	$T_{vj} = 25\ ^\circ\text{C}$		0		$\Omega$
Input capacitance	$C_{ies}$	$f = 100\ \text{kHz}, T_{vj} = 25\ ^\circ\text{C}, V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}$		9.4		nF
Reverse transfer capacitance	$C_{res}$	$f = 100\ \text{kHz}, T_{vj} = 25\ ^\circ\text{C}, V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}$		0.28		nF
Collector-emitter cut-off current	$I_{CES}$	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}$ $T_{vj} = 25\ ^\circ\text{C}$			0.016	mA
Gate-emitter leakage current	$I_{GES}$	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}, T_{vj} = 25\ ^\circ\text{C}$			100	nA
Turn-on delay time (inductive load)	$t_{don}$	$I_C = 150\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Gon} = 4.7\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.035		$\mu\text{s}$
			$T_{vj} = 125\ ^\circ\text{C}$	0.035		
			$T_{vj} = 150\ ^\circ\text{C}$	0.035		
Rise time (inductive load)	$t_r$	$I_C = 150\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Gon} = 4.7\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.050		$\mu\text{s}$
			$T_{vj} = 125\ ^\circ\text{C}$	0.050		
			$T_{vj} = 150\ ^\circ\text{C}$	0.050		
Turn-off delay time (inductive load)	$t_{doff}$	$I_C = 150\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Goff} = 4.7\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.241		$\mu\text{s}$
			$T_{vj} = 125\ ^\circ\text{C}$	0.261		
			$T_{vj} = 150\ ^\circ\text{C}$	0.268		
Fall time (inductive load)	$t_f$	$I_C = 150\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Goff} = 4.7\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.023		$\mu\text{s}$
			$T_{vj} = 125\ ^\circ\text{C}$	0.057		
			$T_{vj} = 150\ ^\circ\text{C}$	0.080		

(table continues...)

**Table 8** (continued) Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Turn-on energy loss per pulse	$E_{on}$	$I_C = 150\text{ A}$ , $V_{CE} = 300\text{ V}$ , $L_\sigma = 35\text{ nH}$ , $V_{GE} = \pm 15\text{ V}$ , $R_{Gon} = 4.7\ \Omega$ , $di/dt =$ $2600\text{ A}/\mu\text{s}$ ( $T_{vj} = 150\text{ }^\circ\text{C}$ )	$T_{vj} = 25\text{ }^\circ\text{C}$	3.84		mJ
			$T_{vj} = 125\text{ }^\circ\text{C}$	4.35		
			$T_{vj} = 150\text{ }^\circ\text{C}$	4.51		
Turn-off energy loss per pulse	$E_{off}$	$I_C = 150\text{ A}$ , $V_{CE} = 300\text{ V}$ , $L_\sigma = 35\text{ nH}$ , $V_{GE} = \pm 15\text{ V}$ , $R_{Goff} = 4.7\ \Omega$ , $dv/dt =$ $5000\text{ V}/\mu\text{s}$ ( $T_{vj} = 150\text{ }^\circ\text{C}$ )	$T_{vj} = 25\text{ }^\circ\text{C}$	2.36		mJ
			$T_{vj} = 125\text{ }^\circ\text{C}$	3.31		
			$T_{vj} = 150\text{ }^\circ\text{C}$	3.64		
Thermal resistance, junction to heat sink	$R_{thJH}$	per IGBT		0.690		K/W
Temperature under switching conditions	$T_{vj\text{op}}$		-40		150	$^\circ\text{C}$

## 5 Diode, D2 / D3

**Table 9** Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit	
Repetitive peak reverse voltage	$V_{RRM}$	$T_{vj} = 25\text{ }^\circ\text{C}$	650	V	
Continuous DC forward current	$I_F$		50	A	
Repetitive peak forward current	$I_{FRM}$	$t_p = 1\text{ ms}$	100	A	
$I^2t$ - value	$I^2t$	$V_R = 0\text{ V}$ , $t_p = 10\text{ ms}$	$T_{vj} = 125\text{ }^\circ\text{C}$	390	$\text{A}^2\text{s}$
			$T_{vj} = 150\text{ }^\circ\text{C}$	370	

**Table 10** Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Forward voltage	$V_F$	$I_F = 50\text{ A}$	$T_{vj} = 25\text{ }^\circ\text{C}$	1.65	2.15	V
			$T_{vj} = 125\text{ }^\circ\text{C}$	1.55		
			$T_{vj} = 150\text{ }^\circ\text{C}$	1.50		
Peak reverse recovery current	$I_{RM}$	$I_F = 50\text{ A}$ , $V_R = 300\text{ V}$ , $V_{GE} = -15\text{ V}$ , $-di_F/dt =$ $4100\text{ A}/\mu\text{s}$ ( $T_{vj} = 150\text{ }^\circ\text{C}$ )	$T_{vj} = 25\text{ }^\circ\text{C}$	59.9		A
			$T_{vj} = 125\text{ }^\circ\text{C}$	72.3		
			$T_{vj} = 150\text{ }^\circ\text{C}$	76.6		

(table continues...)

**Table 10** (continued) Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Recovered charge	$Q_r$	$I_F = 50 \text{ A}$ , $V_R = 300 \text{ V}$ , $V_{GE} = -15 \text{ V}$ , $-di_F/dt =$ $4100 \text{ A}/\mu\text{s}$ ( $T_{vj} = 150 \text{ }^\circ\text{C}$ )	$T_{vj} = 25 \text{ }^\circ\text{C}$	1.49		$\mu\text{C}$
			$T_{vj} = 125 \text{ }^\circ\text{C}$	2.75		
			$T_{vj} = 150 \text{ }^\circ\text{C}$	3.18		
Reverse recovery energy	$E_{rec}$	$I_F = 50 \text{ A}$ , $V_R = 300 \text{ V}$ , $V_{GE} = -15 \text{ V}$ , $-di_F/dt =$ $4100 \text{ A}/\mu\text{s}$ ( $T_{vj} = 150 \text{ }^\circ\text{C}$ )	$T_{vj} = 25 \text{ }^\circ\text{C}$	0.332		mJ
			$T_{vj} = 125 \text{ }^\circ\text{C}$	0.638		
			$T_{vj} = 150 \text{ }^\circ\text{C}$	0.734		
Thermal resistance, junction to heat sink	$R_{thJH}$	per diode		1.64		K/W
Temperature under switching conditions	$T_{vj op}$		-40		150	$^\circ\text{C}$

## 6 NTC-Thermistor

**Table 11** Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rated resistance	$R_{25}$	$T_{NTC} = 25 \text{ }^\circ\text{C}$		5		k $\Omega$
Deviation of $R_{100}$	$\Delta R/R$	$T_{NTC} = 100 \text{ }^\circ\text{C}$ , $R_{100} = 493 \text{ } \Omega$	-5		5	%
Power dissipation	$P_{25}$	$T_{NTC} = 25 \text{ }^\circ\text{C}$			20	mW
B-value	$B_{25/50}$	$R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298,15 \text{ K}))]$		3375		K
B-value	$B_{25/80}$	$R_2 = R_{25} \exp[B_{25/80}(1/T_2 - 1/(298,15 \text{ K}))]$		3411		K
B-value	$B_{25/100}$	$R_2 = R_{25} \exp[B_{25/100}(1/T_2 - 1/(298,15 \text{ K}))]$		3433		K

Note: Specification according to the valid application note.




## 7 Characteristics diagrams

### Output characteristic (typical), IGBT, T1 / T4

$$I_C = f(V_{CE})$$


$$V_{GE} = 15 \text{ V}$$

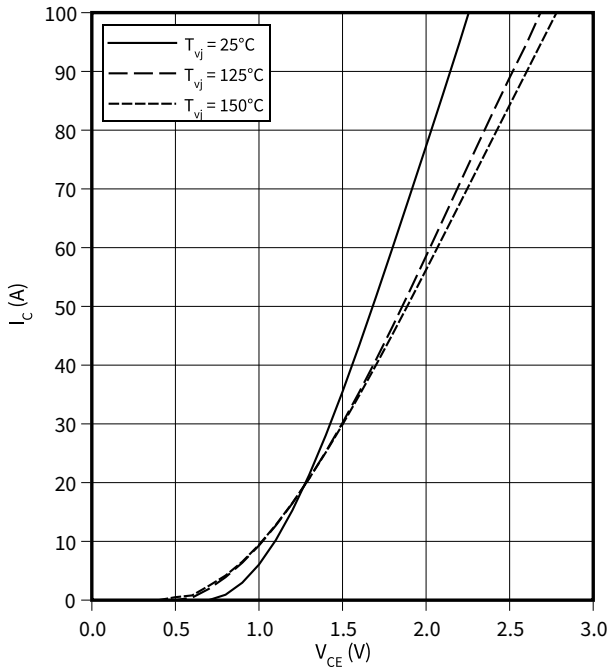

### Output characteristic field (typical), IGBT, T1 / T4

$$I_C = f(V_{CE})$$


$$T_{vj} = 150 \text{ °C}$$

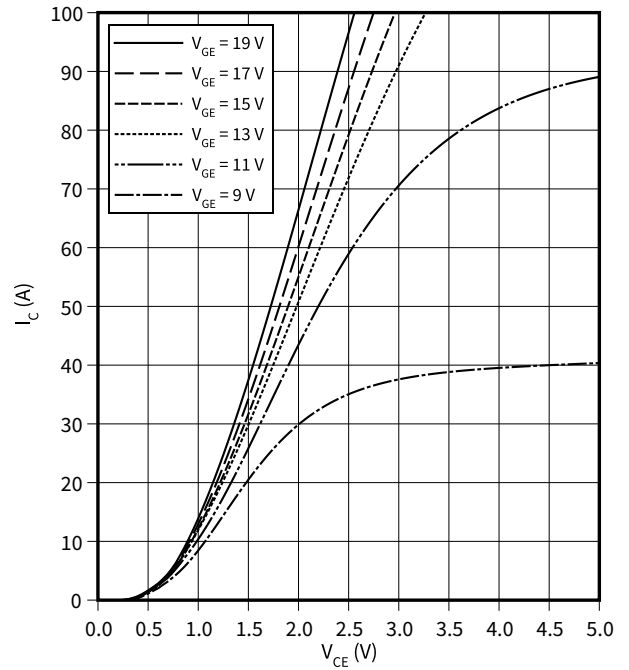

### Transfer characteristic (typical), IGBT, T1 / T4

$$I_C = f(V_{GE})$$


$$V_{CE} = 20 \text{ V}$$

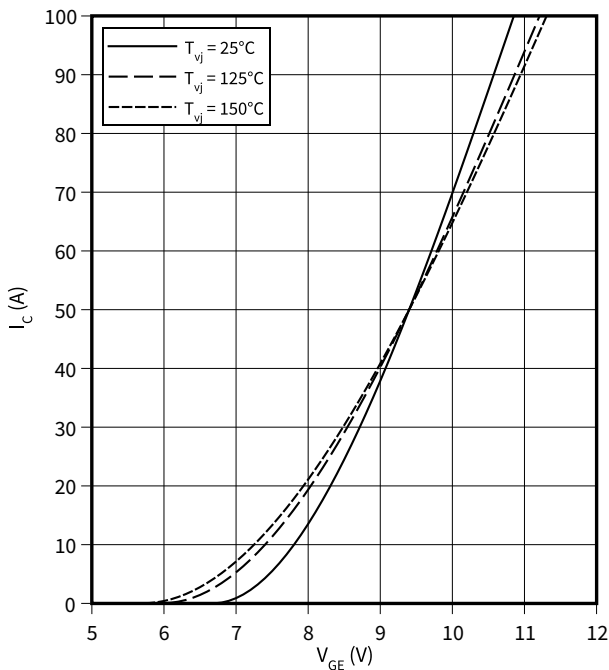

### Switching losses (typical), IGBT, T1 / T4

$$E = f(I_C)$$

$$R_{Goff} = 2.2 \text{ } \Omega, R_{Gon} = 2.2 \text{ } \Omega, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}$$

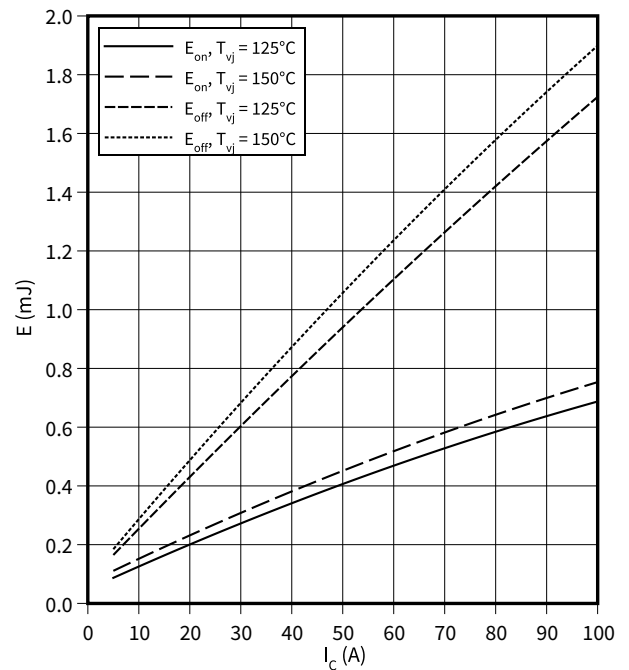


7 Characteristics diagrams

**Switching losses (typical), IGBT, T1 / T4**

$E = f(R_G)$


$I_C = 50 \text{ A}, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}$

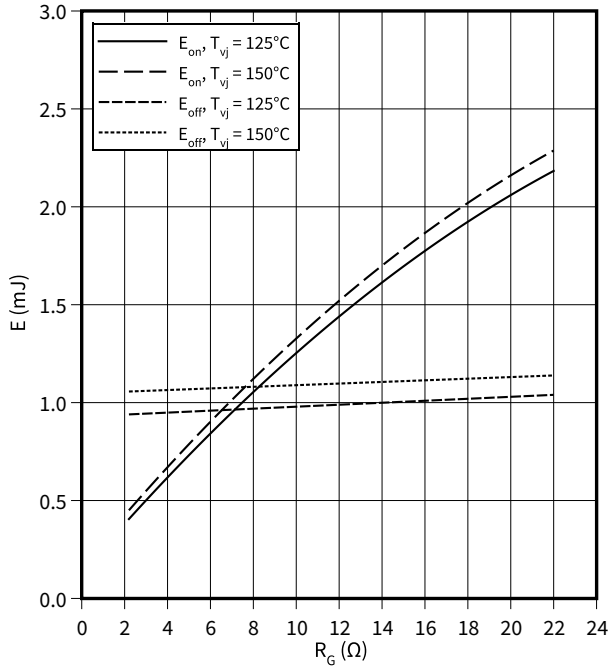

**Switching times (typical), IGBT, T1 / T4**

$t = f(I_C)$


$R_{Goff} = 2.2 \Omega, R_{Gon} = 2.2 \Omega, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 150 \text{ °C}$

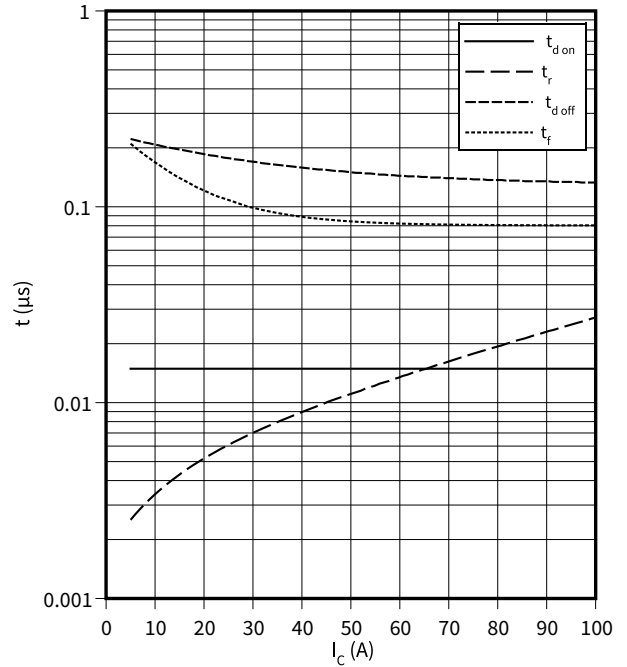

**Switching times (typical), IGBT, T1 / T4**


$t = f(R_G)$

$I_C = 50 \text{ A}, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 150 \text{ °C}$

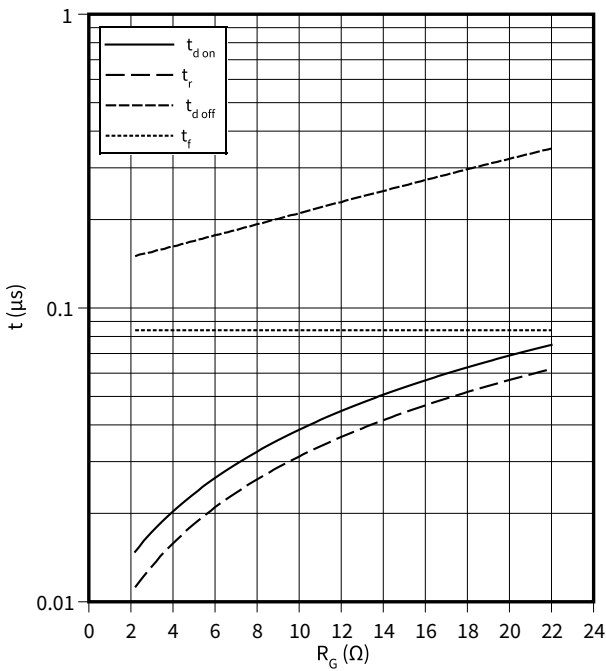

**Transient thermal impedance, IGBT, T1 / T4**

$Z_{th} = f(t)$

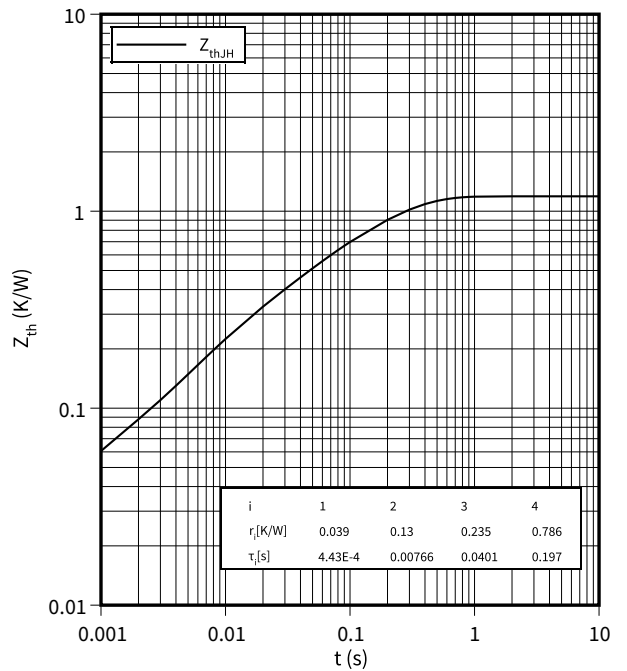


7 Characteristics diagrams

**Reverse bias safe operating area (RBSOA), IGBT, T1 / T4**


$I_C = f(V_{CE})$

$R_{Goff} = 2.2 \Omega$ ,  $V_{GE} = \pm 15 \text{ V}$ ,  $T_{vj} = 150 \text{ }^\circ\text{C}$

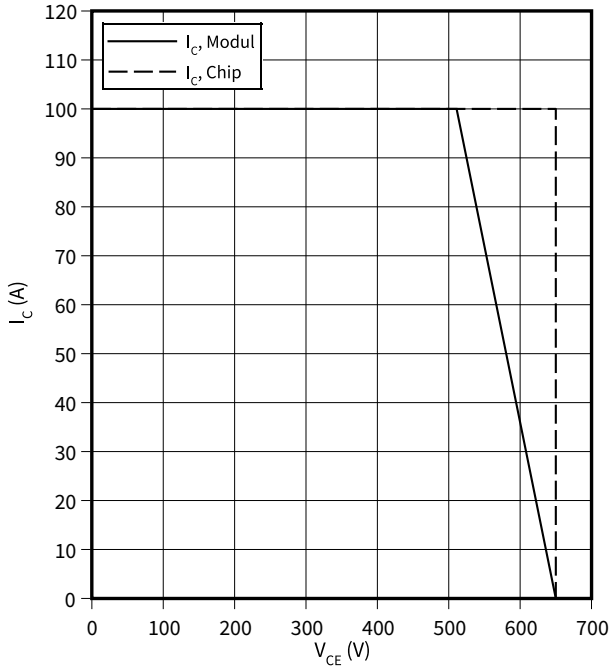


**Forward characteristic (typical), Diode, D1 / D4**

$I_F = f(V_F)$

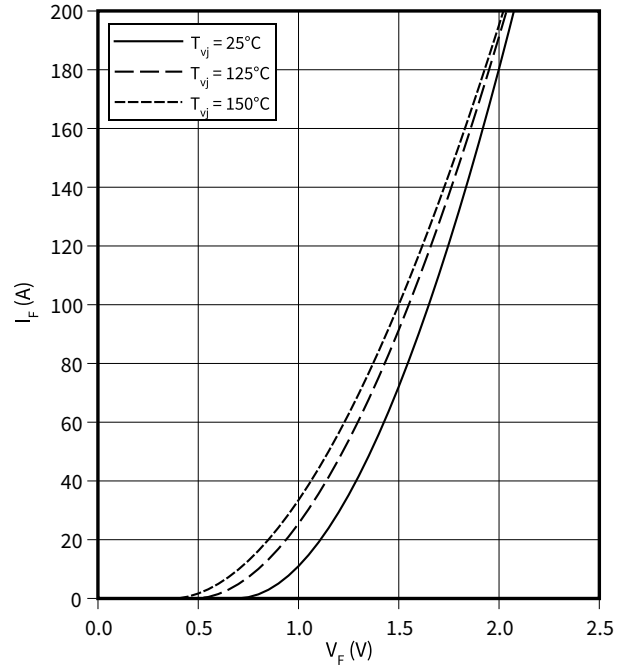

**Transient thermal impedance, Diode, D1 / D4**


$Z_{th} = f(t)$

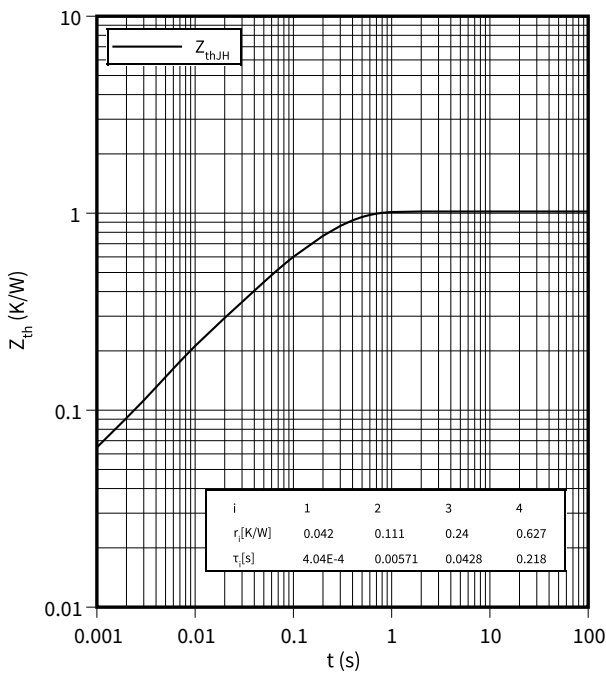

**Switching losses (typical), Diode, D1 / D4**

$E_{rec} = f(I_F)$

$R_{Gon} = 4.7 \Omega$ ,  $V_{CE} = 300 \text{ V}$

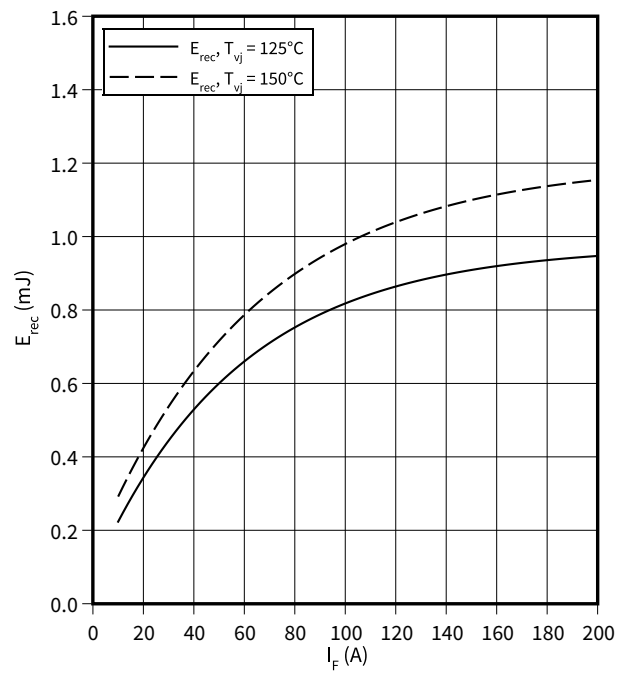


7 Characteristics diagrams

**Switching losses (typical), Diode, D1 / D4**

$E_{rec} = f(R_G)$


$V_{CE} = 300\text{ V}, I_F = 100\text{ A}$

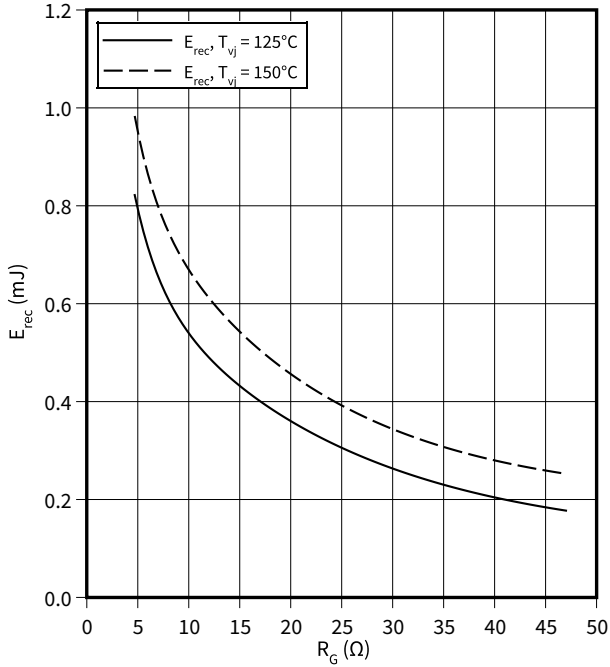

**Output characteristic (typical), IGBT, T2 / T3**

$I_C = f(V_{CE})$


$V_{GE} = 15\text{ V}$

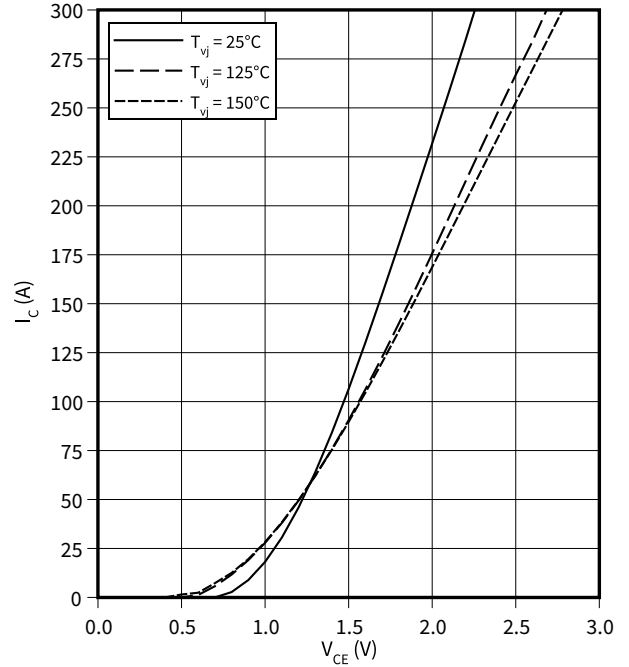

**Output characteristic field (typical), IGBT, T2 / T3**

$I_C = f(V_{CE})$


$T_{vj} = 150\text{ °C}$

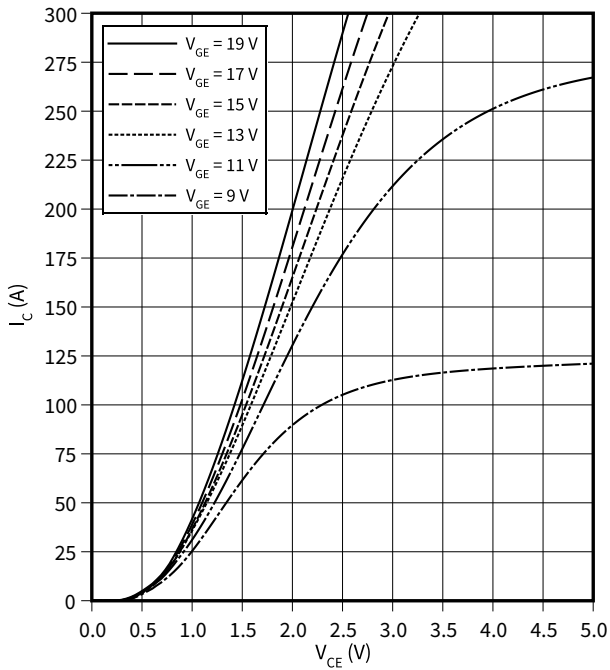

**Transfer characteristic (typical), IGBT, T2 / T3**

$I_C = f(V_{GE})$

$V_{CE} = 20\text{ V}$

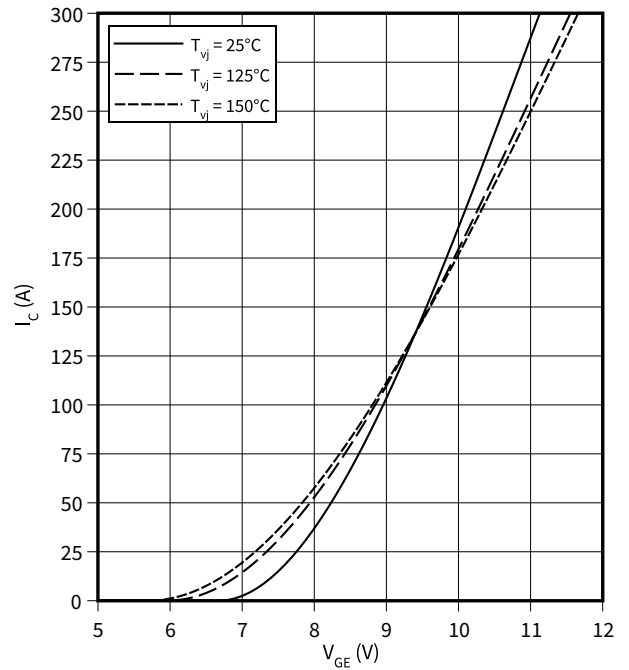


7 Characteristics diagrams

**Switching losses (typical), IGBT, T2 / T3**

$E = f(I_C)$


$R_{Goff} = 4.7 \Omega$ ,  $R_{Gon} = 4.7 \Omega$ ,  $V_{CE} = 300 \text{ V}$ ,  $V_{GE} = +/- 15 \text{ V}$

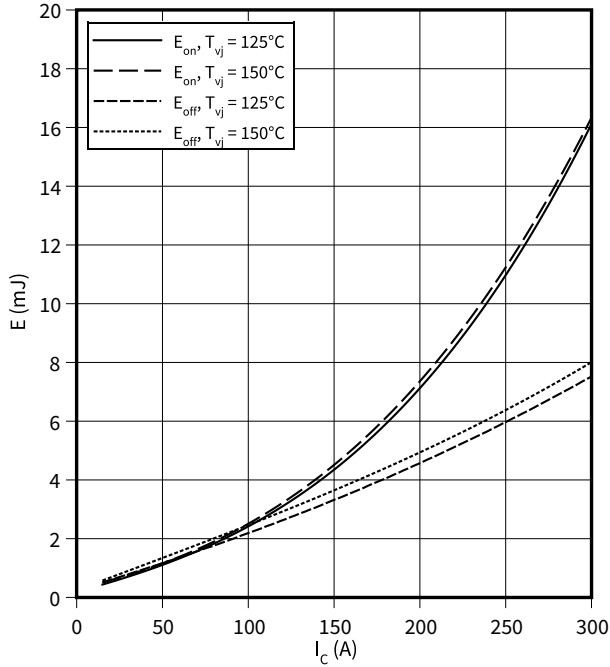

**Switching losses (typical), IGBT, T2 / T3**

$E = f(R_G)$


$I_C = 150 \text{ A}$ ,  $V_{CE} = 300 \text{ V}$ ,  $V_{GE} = +/- 15 \text{ V}$

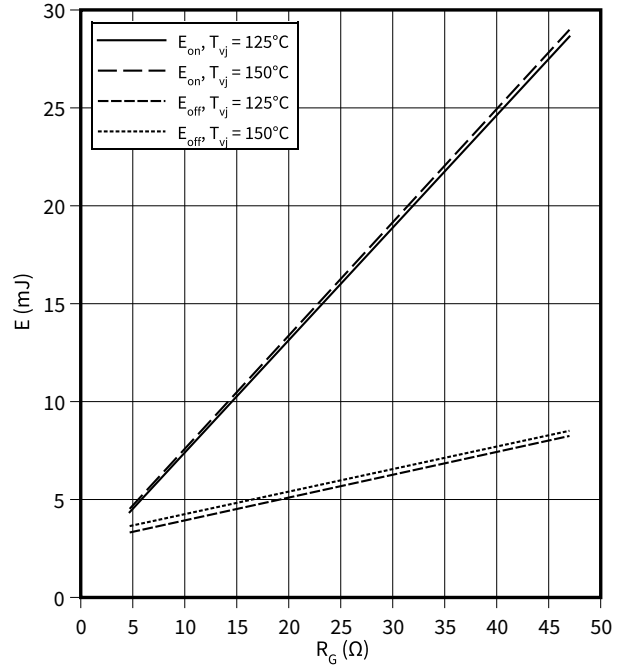

**Switching times (typical), IGBT, T2 / T3**

$t = f(I_C)$


$R_{Goff} = 4.7 \Omega$ ,  $R_{Gon} = 4.7 \Omega$ ,  $V_{CE} = 300 \text{ V}$ ,  $V_{GE} = +/- 15 \text{ V}$ ,  $T_{vj} = 150 \text{ °C}$

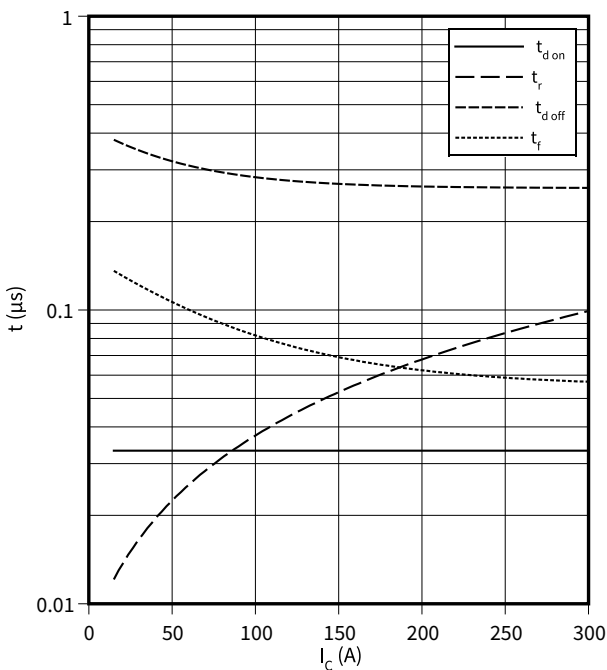

**Switching times (typical), IGBT, T2 / T3**

$t = f(R_G)$


$I_C = 150 \text{ A}$ ,  $V_{CE} = 300 \text{ V}$ ,  $V_{GE} = +/- 15 \text{ V}$ ,  $T_{vj} = 150 \text{ °C}$

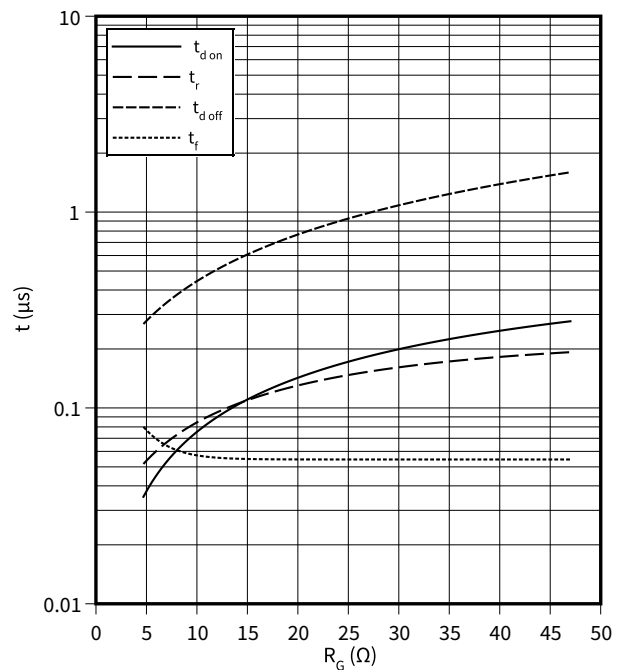

7 Characteristics diagrams

**Transient thermal impedance, IGBT, T2 / T3**


$Z_{th} = f(t)$

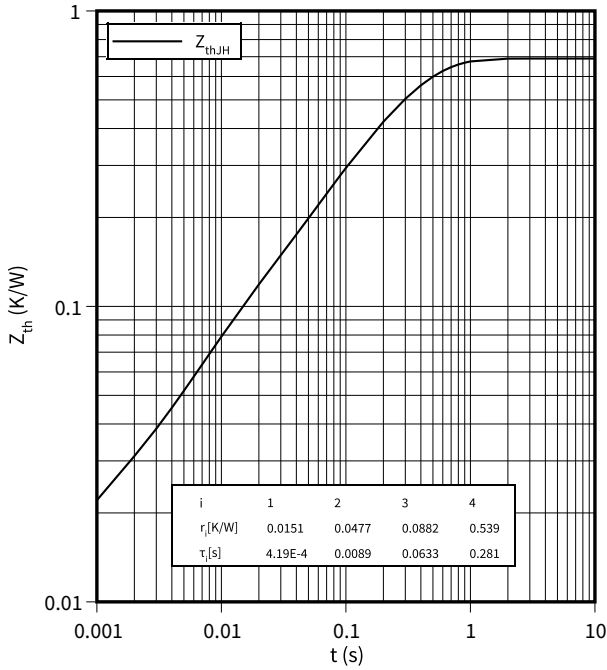

**Reverse bias safe operating area (RBSOA), IGBT, T2 / T3**


$I_C = f(V_{CE})$

$R_{Goff} = 4.7 \Omega, V_{GE} = \pm 15 V, T_{vj} = 150 \text{ }^\circ\text{C}$

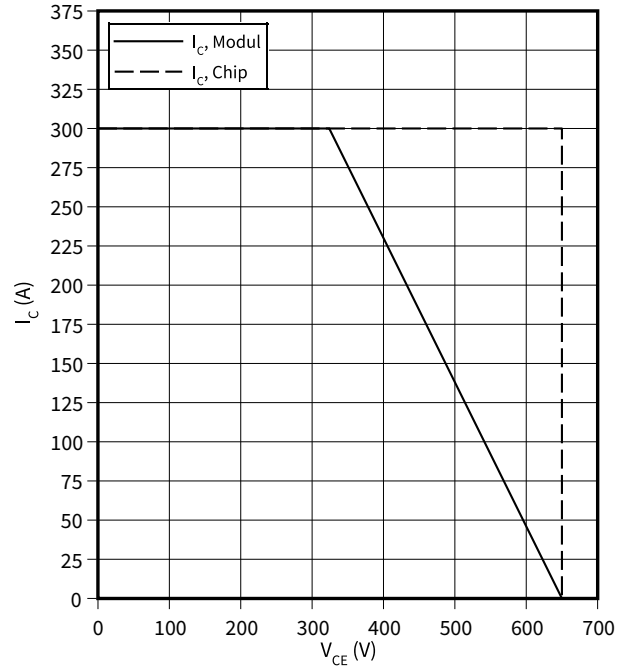


**Forward characteristic (typical), Diode, D2 / D3**

$I_F = f(V_F)$

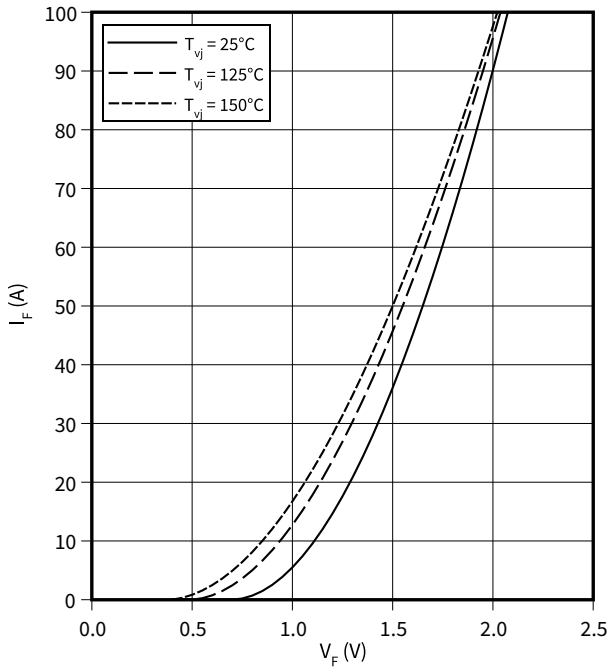

**Transient thermal impedance, Diode, D2 / D3**

$Z_{th} = f(t)$

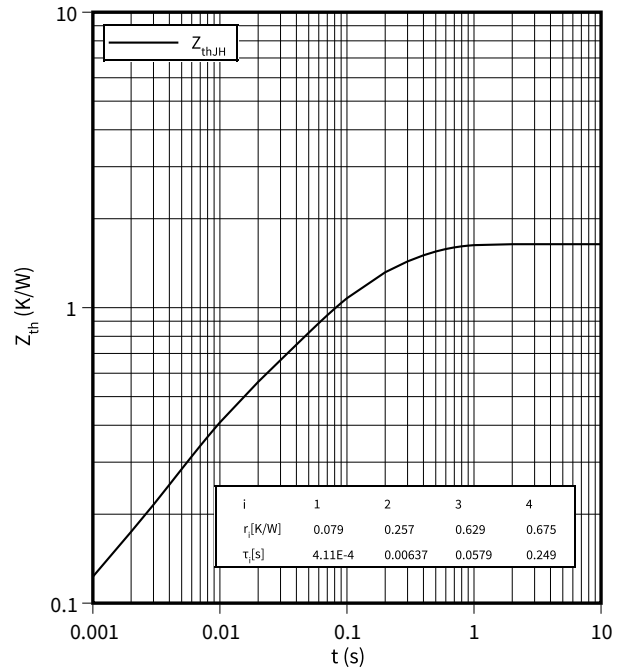


7 Characteristics diagrams

**Switching losses (typical), Diode, D2 / D3**

$E_{rec} = f(I_F)$


$R_{Gon} = 2.2 \Omega, V_{CE} = 300 V$

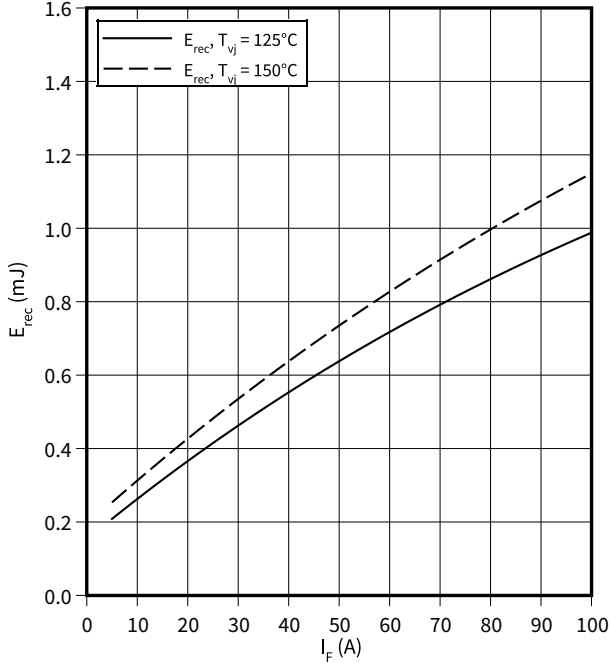

**Switching losses (typical), Diode, D2 / D3**


$E_{rec} = f(R_G)$

$V_{CE} = 300 V, I_F = 50 A$

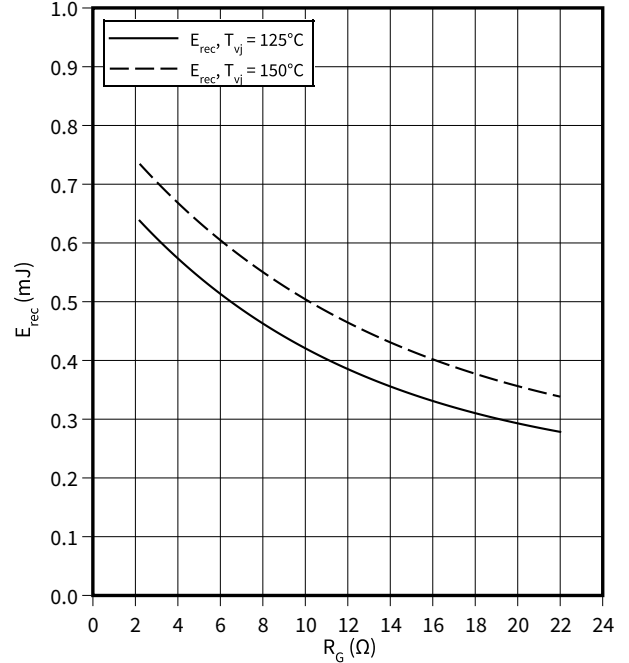

**Temperature characteristic (typical), NTC-Thermistor**

$R = f(T_{NTC})$

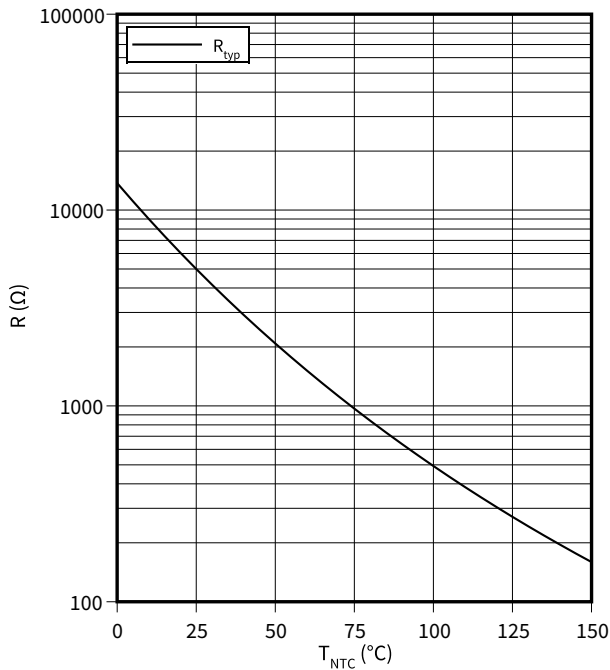

## 8 Circuit diagram

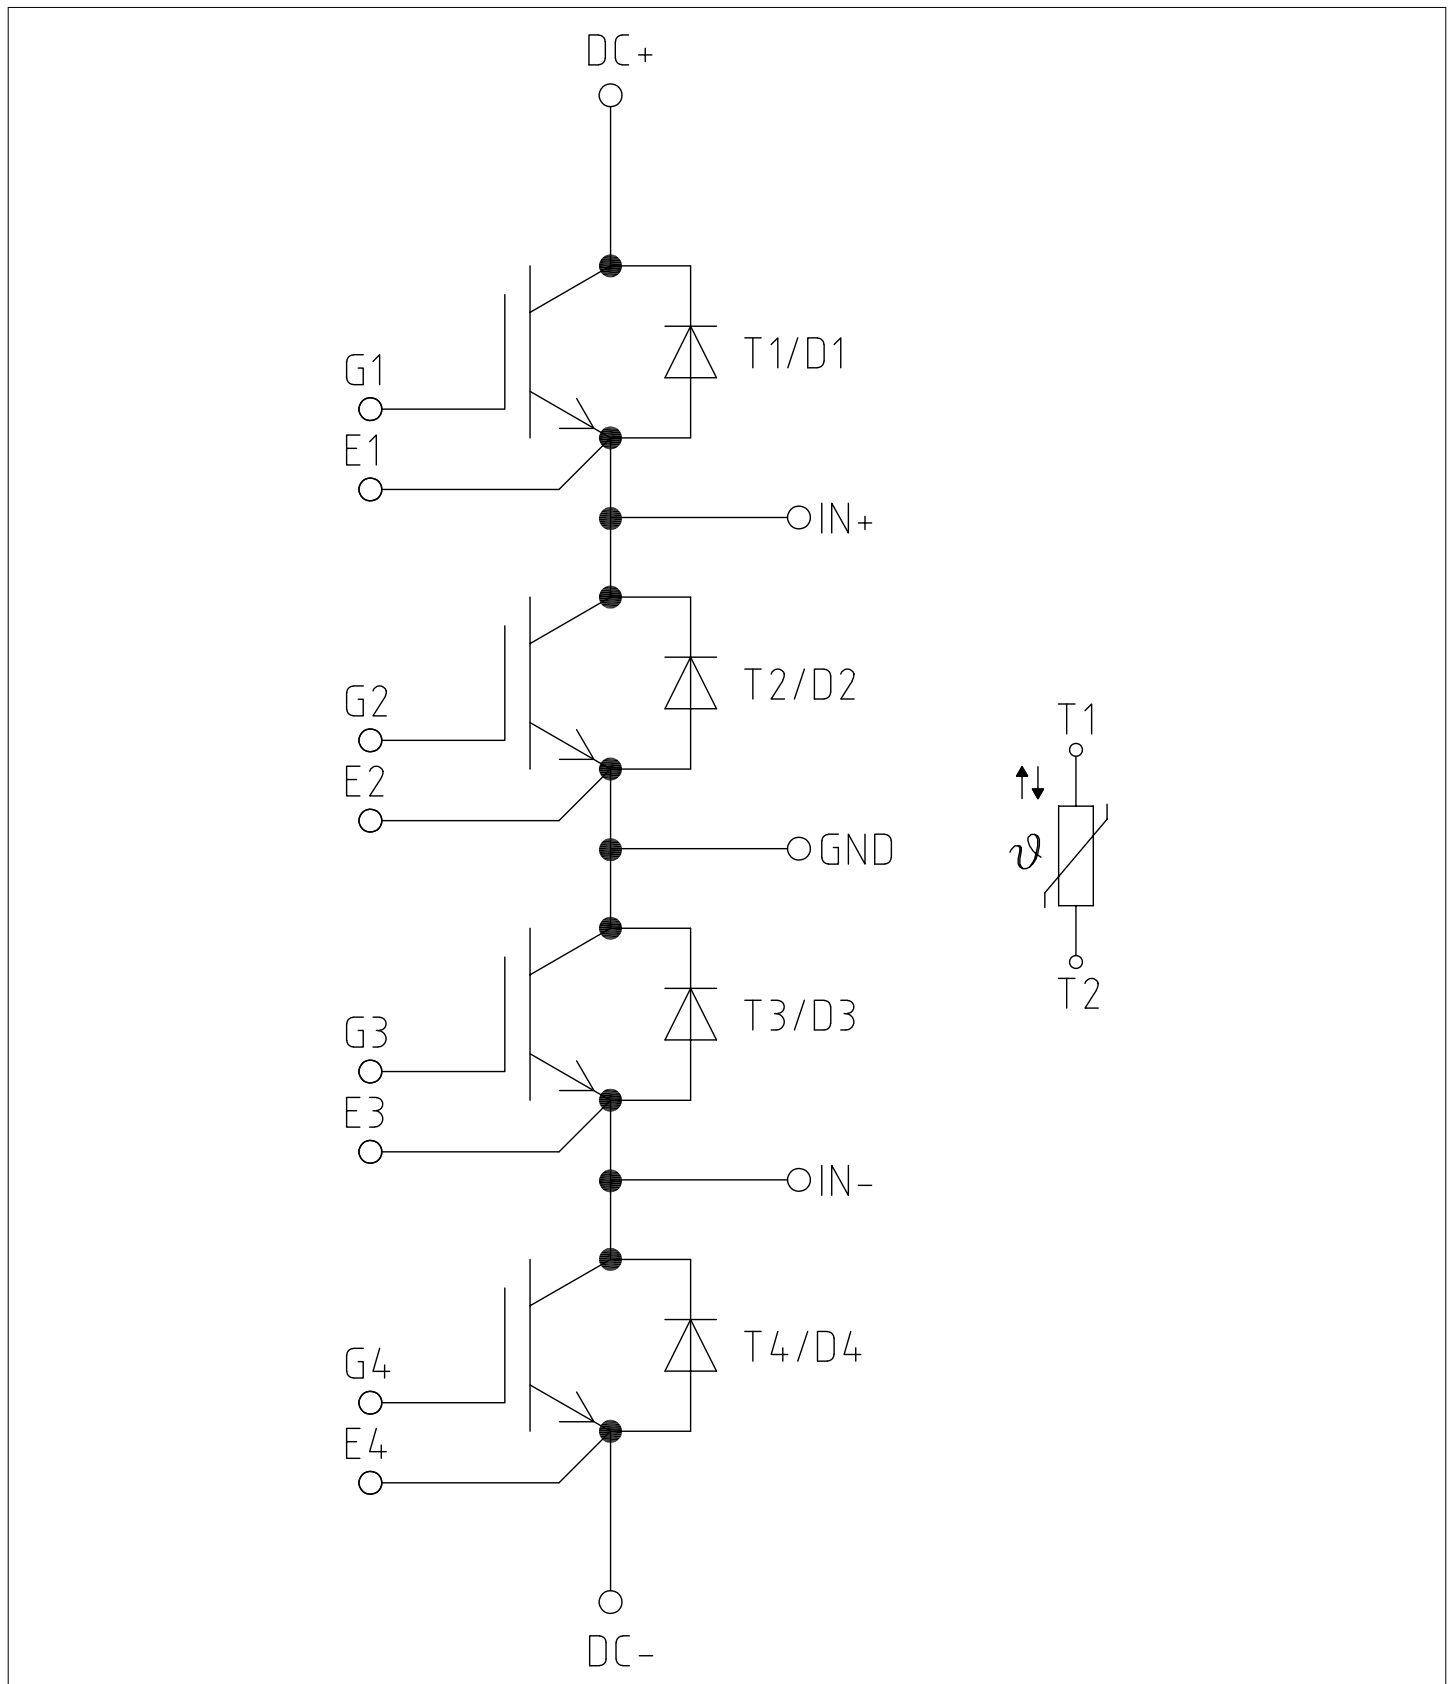


Figure 1



9 Package outlines

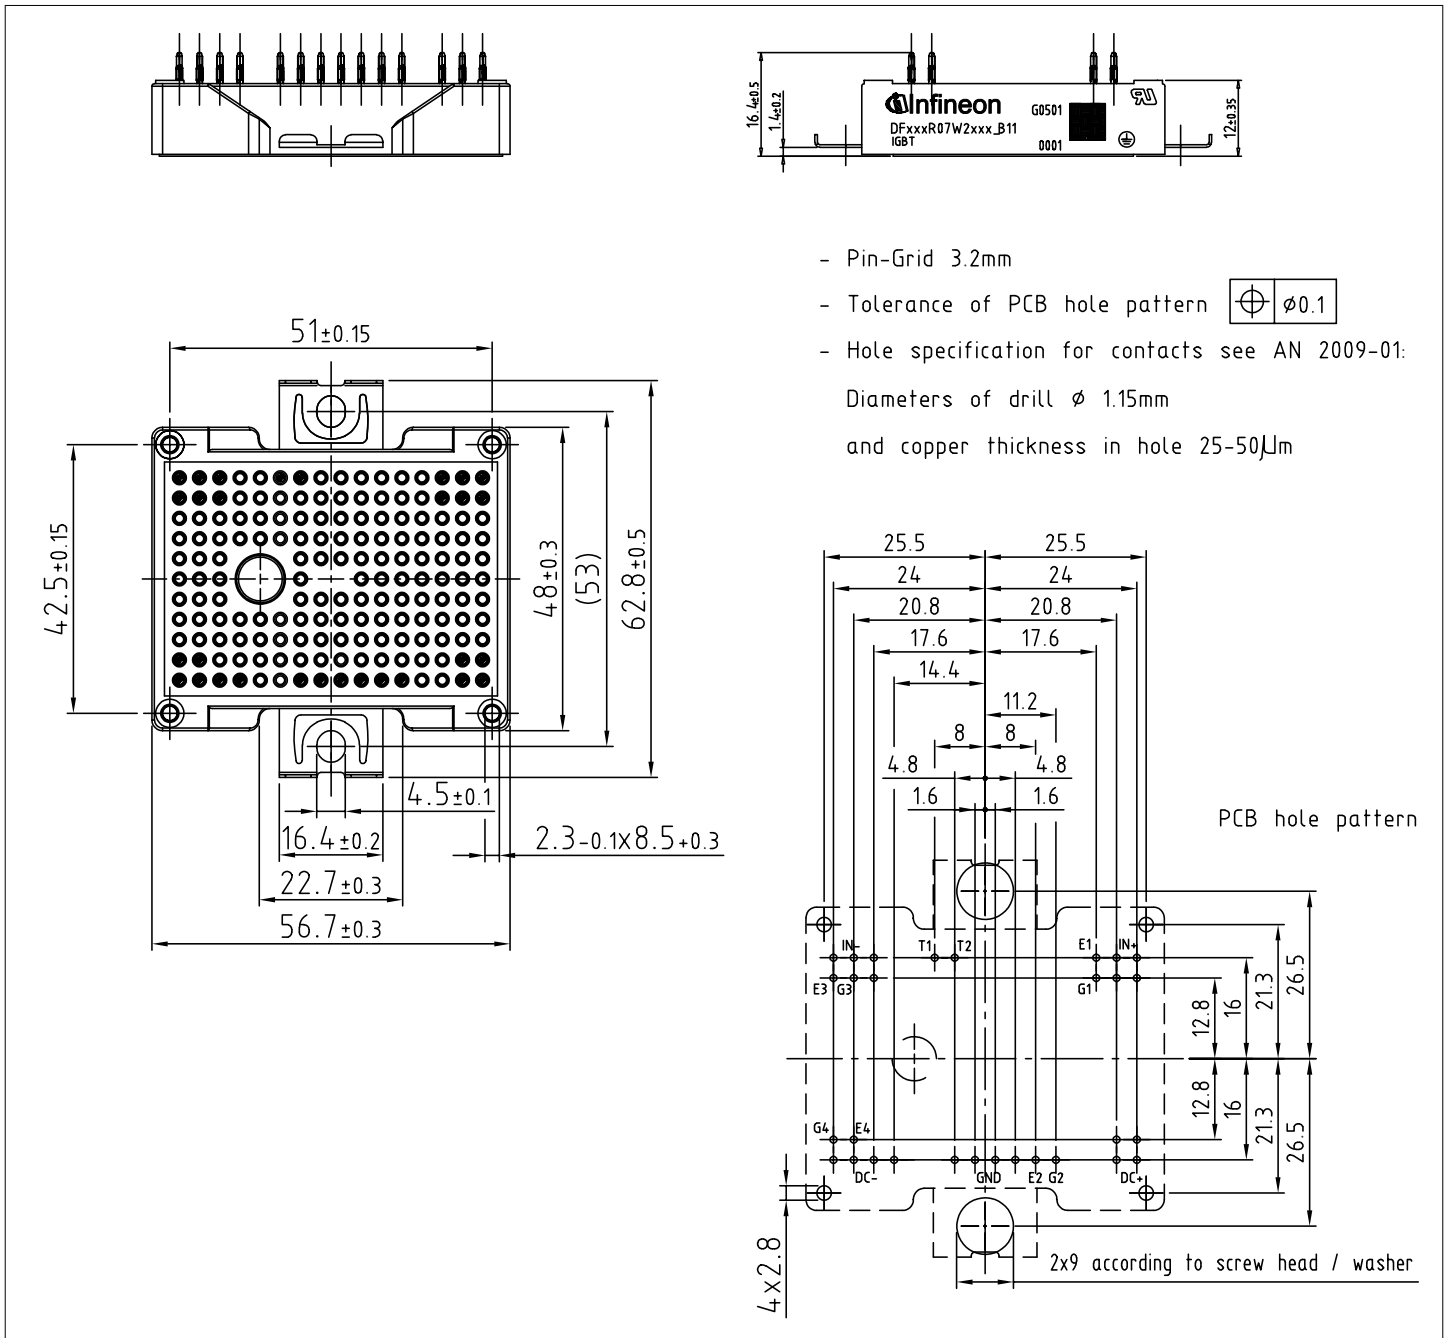


Figure 2

## 10 Module label code


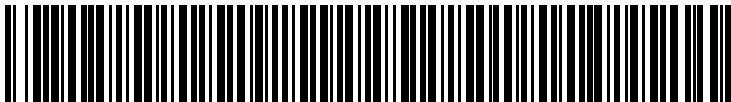
Module label code			
Code format	Data Matrix	Barcode Code128	
Encoding	ASCII text	Code Set A	
Symbol size	16x16	23 digits	
Standard	IEC24720 and IEC16022	IEC8859-1	
Code content	<i>Content</i>	<i>Digit</i>	<i>Example</i>
	Module serial number	1 - 5	71549
	Module material number	6 - 11	142846
	Production order number	12 - 19	55054991
	Date code (production year)	20 - 21	15
	Date code (production week)	22 - 23	30
Example	 		
	71549142846550549911530		71549142846550549911530

Figure 3

## Revision history

Document revision	Date of release	Description of changes
0.10	2021-06-30	Target datasheet
1.00	2021-11-15	Final datasheet

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2021-11-15**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2021 Infineon Technologies AG**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

**IFX-AAH916-002**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.