

multicomp PRO



MP720681 Two-Channel Series PC Based Oscilloscope Programming Manual

1. SCPI (Standard Commands for Programmable Instruments)..... 5

| | |
|--------------------------------|---|
| SCPI Structure..... | 5 |
| Syntax Rule | 5 |
| SCPI Abbreviation..... | 7 |
| Third-party API for SCPI | 7 |

2. IEEE488.2 Common Commands 8

| | |
|------------|---|
| *IDN | 8 |
| *RST | 8 |

3. SCPI for Oscilloscope Part..... 9

| | |
|--|----|
| :HORIzontal command sub-structures | 9 |
| i. :HORIzontal:SCALe..... | 9 |
| ii. :HORIzontal:OFFSet | 9 |
| :CH command sub-structures | 10 |
| i. :CH<n>:BANDwidth..... | 10 |
| ii. :CH<n>:DISPlay | 11 |
| iii. :CH<n>:COUPLing..... | 11 |
| iv. :CH<n>:SCALe | 12 |
| v. :CH<n>:OFFSet | 12 |
| vi. :CH<n>:INVErse | 13 |
| :ACQuire command sub-structures..... | 14 |
| i. :ACQuire:MODE..... | 14 |
| ii. :ACQuire:DEPMEM | 14 |
| :TRIGger command sub-structures..... | 15 |
| i. :TRIGger:STATUS | 15 |
| ii. :TRIGger:FORCe | 15 |
| iii. :TRIGger:HALF..... | 16 |
| iv. :TRIGger:TYPE | 16 |
| v. :TRIGger:SINGle | 16 |
| i). :TRIGger:SINGle:MODE <type>..... | 16 |
| ii). :TRIGger:SINGle:SWEep..... | 17 |
| iii). :TRIGger:SINGle:HOLDoff..... | 17 |
| iv). :TRIGger:SINGle:EDGE | 18 |
| :TRIGger:SINGle:EDGE:SOURce | 18 |
| :TRIGger:SINGle:EDGE:COUPLing | 18 |
| :TRIGger:SINGle:EDGE:SLOPe | 19 |
| :TRIGger:SINGle:EDGE:LEVel..... | 20 |
| v). :TRIGger:SINGle:VIDeo | 20 |
| :TRIGger:SINGle:VIDeo:SOURce | 20 |
| :TRIGger:SINGle:VIDeo:MODU | 21 |
| :TRIGger:SINGle:VIDeo:SYNC | 21 |

| | |
|---|----|
| :TRIGger:SINGle:VIDeo:LNUM..... | 22 |
| vi). :TRIGger:SINGle:SLOPe | 22 |
| :TRIGger:SINGle:SLOPe:ULevel..... | 22 |
| :TRIGger:SINGle:SLOPe:LLevel..... | 23 |
| :TRIGger:SINGle:SLOPe:SOURce..... | 24 |
| :TRIGger:SINGle:SLOPe:TIME | 24 |
| :TRIGger:SINGle:SLOPe:WHEN | 25 |
| vii). :TRIGger:SINGle:PULSe..... | 26 |
| :TRIGger:SINGle:PULSe:SOURce..... | 26 |
| :TRIGger:SINGle:PULSe:TIME | 26 |
| :TRIGger:SINGle:PULSe:COUpling..... | 27 |
| :TRIGger:SINGle:PULSe:WHEN | 27 |
| :LAN command sub-structures | 28 |
| i. :LAN:DEVice..... | 28 |
| ii. :LAN:PROTocol | 29 |
| iii. :LAN:IPADDress..... | 29 |
| iv. :LAN:MASK | 30 |
| v. :LAN:GATEway..... | 31 |
| vi. :LAN:DNS | 31 |
| vii.:LAN:MAC..... | 32 |
| :WAVEform command sub-structures | 32 |
| i. :WAVEform:DATA | 32 |
| ii. the combination of commands to read the original data | 33 |
| :WAVEform:BEGin..... | 33 |
| :WAVEform:PREamble | 33 |
| :WAVEform:RANGE..... | 34 |
| :WAVEform:FETCh..... | 34 |
| :WAVEform:END | 34 |
| :MEASure command sub-structures..... | 35 |
| i. :MEASure:DISPlay | 35 |
| ii. :MEASure:TImer..... | 36 |
| iii. :MEASure:SOURce | 37 |
| iv. :MEASure:OVERflow..... | 37 |
| v. :MEASure:<items>..... | 37 |
| vi. :MEASure:<items> ? <cha>,<chb> | 40 |
| Other Commands..... | 41 |
| i. :AUToset | 41 |
| ii. :CALibrate | 41 |
| iii. :RUN..... | 42 |
| iv. :STOP..... | 42 |
| v. :LAN:PORT | 42 |

4. Supplement: Sampling Rate Conversion Rule 44

5. Supplement: WAVEform:DATA? Return Result..... 45

| | |
|--|----|
| i. empty data packet content parsing | 45 |
| ii. effective data packet content parsing | 45 |
| iii. other accompanying information from data packet | 46 |
| iv. Calculation Tips Towards Waveform Data | 48 |

1. SCPI (Standard Commands for Programmable Instruments)

SCPI Structure

SCPI comes in tree structure, with sub-structures (command lines) covered. Each sub-structure (command line) comprises one root keyword and one keyword, or more layers keyword.

The command line starts in “：“, with “：“ as the separator between keywords, after the last keyword, followed by available parameters, with “space” as the separator between keyword and parameter. The “?” after one command line means the checking inquiry for the command line.

Giving an example,

:TRIGger:SINGle:EDGE:SOURce <source>

From which, **TRIGger** is the root keyword, **SINGle**, **EDGE** and **SOURce** is the second-layer, third-layer and fourth-layer keywords. This command line starts in “：“, with next 3 respective “：“ to separate the keywords, <source> as available parameters, with “space” to separate <source> and previous part.

:TRIGger:SINGle:EDGE:SOURce?

“?” is to inquire “:TRIGger:SINGle:EDGE:SOURce”.

Syntax Rule

SCPI language defines the keyword of command lines, the keyword quantity within one command line is flexible, could be more or less. The keywords mainly come from meaningful English words, easy to remember, so-called “mnemonic”. Mnemonic gets 2 category: long type and short type, generally speaking, the short type is always the abbreviation of the long type. Some special symbols been introduced to separate keywords, keyword and parameter, parameters, command lines.

Mnemonic Formation Rule

- i. Judged by the character length of one word, for the word not longer than 4 characters, it could be mnemonic by itself. Giving an example, the word “free” been used as mnemonic “FREE”.
- ii. For the word longer than 4 characters, its first 4 characters work as mnemonic, like “FREQ” from the word “frequency”.
- iii. Provided the 4th character from any mnemonic is vowel (a, e, i, o, u), delete the character from mnemonic. Giving an example, the word “power” been shorted as “POW” when working as mnemonic.
- iv. For word group, or sentence, the first character from every word, and the full character from last word forms the mnemonic. Giving ans example, the word group “input voltage” gets “IVOLtage” as mnemonic.

Special Symbol (as separator)

- i. space (“ ”)

Been introduced to separate command and parameter.

ii. colon (“:”)

The different position of colon matches different meaning: when it locates the beginning of one command line, the command after it will be root command; when it is between two keywords, the keyword after it always mean the next layer.

iii. asterisk (“*”)

The command line starts with asterisk been called “common command”, been given to execute IEEE488.2 standard command.

iv. braces (“{ }”)

The contents covered in braces is parameter. The vertical “|” separates parameters. When the command been introduced, at least one parameter from “{ }” should be chosen.

v. vertical (“|”)

The vertical “|” separates parameters.

vi. square brackets (“[]”)

The contents covered in the square brackets isn't a must, in other words, contents here could be chosen, or not been chosen .

vii. triangle brackets (“< >”)

The contents covered in the triangle brackets is effective parameter, one of these effective parameters should be chosen.

Parameter Type

3 type parameter been referred: Discrete, Integer and Bool

i. Discrete

One of given options should be chosen as the parameter. Giving an example,

`:TRIGger:SINGle:EDGE:SOURce <source>`

From which, the option for <source> could be one of CH1|CH2.

`:TRIGger:SINGle:EDGE:SOURce?`

When this command line comes, the result will be "CH1", or "CH2".

ii. Integer

Unless specified, the parameter could be any NR1 format integer within the effective value range.

Note: Any parameter with decimal set will cause errors / abnormal result.

Giving an example,

`:LAN:PORT<port>`

From which, <port> could be any integer ranges from 0 till 65535.

`:LAN:PORT?`

When this command line comes, the result will be any integer ranges from 0 till 65535.

iii. Bool

The parameter value reads "OFF", or "ON", giving an example,

:CH1:DISPlay <bool>

From which, <bool> could be one of {OFF|ON}

:CH1:DISPlay?

When this command line comes, the result will be "OFF", or "ON".

iv. Real

The parameter could be any real within the effective value range,

Note: Any NR2 format decimal, or any NR3 format scientific notation parameter is acceptable.

giving an example

:TRIGger:SINGle:HOLDoff <time>

From which, <time> could be any real ranges from 0.0000001, or 1.000000e-07 (i.e. 100ns) till 10, or 0.1e+02 (i.e. 10s)

:TRIGger:SINGle:HOLDoff?

When this command line comes, the result will be certain real within a.m. ranges.

SCPI Abbreviation

When editing command line, the syntax rule should be well-followed, with capital and small letter combined, among which, capital letter always act as the abbreviation of the current command. When abbreviated the current command, the full capital letter should be there. For the abbreviation of parameter with unit, please refer to the capital/small letter rule within parameter range from sub-structures.

Giving examples,

Example 1

:ACQuire:MODE SAMPLE

Abbreviated as

:ACQ:MODE SAMP

Example 2

:CH1:SCALe 1v

Abbreviated as

:CH1:SCAL 1v

Third-party API for SCPI

USB or LAN communication supported.

2. IEEE488.2 Common Commands

*IDN

Syntax

*IDN?

Description

The inquiry returns the device ID, in the form of ASCII string.

Return Result

<model no.> <serial number> VX.XX.XX

Among which, <model no.> matches the model no. of the current device;

<serial number> indicates the device serial number;

VX.XX.XX tells the device software version info.s.

Example

*IDN?

*RST

Syntax

*RST

Description

Restore the device to its default status.

3. SCPI for Oscilloscope Part

:HORizontal command sub-structures

i. :HORizontal:SCALe

Syntax

:HORizontal:SCALe <scale_value>

:HORizontal:SCALe?

Description

Set the division of time base.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-----------------------------|---------|
| <scale_value> | discrete | refer to Explanation | 1.0ms |

Explanation

With main time base setting as default value.

The options for time base -

{2.0ns|5.0ns|10ns|20ns|50ns|100ns|200ns|500ns|1.0us|2.0us|5.0us|10us|20us|50us|100us|200us|500us|1.0ms|2.0ms|5.0ms|10ms|20ms|50ms|100ms|200ms|500ms|1.0s|2.0s|5.0s|10s|20s|50s|100s}

Return Result

The inquiry returns the time base division value, in the form of ASCII string.

Example

:HORI:SCAL 200us /* Set the main time base division at 200us. */

:HORI:SCAL?

(The Return Result) 200us

ii. :HORizontal:OFFSet

Syntax

:HORizontal:OFFSet <value>

:HORizontal:OFFSet?

Description

Set the horizontal trigger position from the time base.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|--|---------|
| <value> | Real | refer to Explanation (no. of division for horizontal movement) | 0 |

Explanation

Range:

move rightwards (negative division no.): - memory depth / 2 / (sampling rate x time base)

move leftwards (positive division no.): 50 000 000 / (sampling rate x time base)

If the current main time base set at 500 us/div, assume the horizontal movement is 2 division, the horizontal offset time will be 1.000 ms.

Return Result

The inquiry returns the horizontal trigger position, in the form of ASCII string.

Example

```
:HORI:OFFS 2 /* set the horizontal position moves by +2 division */  
:HORI:OFFS? /* time base set at 500us, horizontal position displays "1.000ms"*/  
(The Return Result) 2
```

:CH command sub-structures

i. :CH<n>:BANDwidth

Syntax

```
:CH<n>:BANDwidth <type>  
:CH<n>:BANDwidth?
```

Description

To set / inquire the bandwidth limit parameter of the specified channel.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-----------|---------|
| <n> | Discrete | {1 2 3 4} | 1 |
| < type> | Discrete | {OFF 20M} | OFF |

Explanation

The range of <type> decided by the device model no.

20M: Activate the bandwidth limit at 20MHz, the high-frequency components from the measured signal will be shielded.

OFF: Disable the bandwidth limit function, the high-frequency component from the measured signal will be displayed.

Return Result

The inquiry returns "OFF", or "20M".

Example

```
:CH1:BAND 20M /*activate the bandwidth limit at 20MHz from Channel 1*/
```

:CH1:BAND?

(The Return Result) 20M

ii. :CH<n>:DISPlay

Syntax

:CH<n>:DISPlay <bool>

:CH<n>:DISPlay?

Description

Turns on/off / inquires the display of the channel input signal.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-----------|---------|
| <n> | Discrete | {1 2 3 4} | 1 |
| <bool> | Bool | {OFF ON} | ON |

Return Result

The inquiry returns "OFF", or "ON".

Example

:CH1:DISP ON /* turns on the display of Channel1 signal */

:CH1:DISP?

(The Return Result) ON

iii. :CH<n>:COUPLing

Syntax

:CH<n>:COUPLing <coupling>

:CH<n>:COUPLing?

Description

To set / inquire the coupling mode of the channel input to "AC", "DC" or "GND".

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------|---------|
| <n> | Discrete | {1 2 3 4} | 1 |
| <coupling> | Discrete | {AC DC GND} | AC |

Return Result

The inquiry returns "AC", "DC" or "GND".

Example

```
:CH1:COUP DC    /* sets the coupling mode of Channel 1 input to "DC" */
:CH1:COUP?
(The Return Result)  DC
```

iv. :CH<n>:SCALe**Syntax**

```
:CH<n>:SCALe <scale>
:CH<n>:SCALe?
```

Description

To set / inquire the vertical scale of the displayed signal from the specified channel.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---|---------|
| <n> | Discrete | {1 2 3 4} | 1 |
| <scale> | Discrete | {2mv 5mv 10mv 20mv 50mv 100mv 200mv 500mv 1v 2v 5v} | 1v |

Explanation

When setting the parameter, the probe rate is one factor should be considered. Giving an example, the probe rate in X10, to set 10mv division, the command line goes in :CH<n>:SCALe 1mv

Return Result

The inquiry returns the vertical division value, in the form of ASCII string.

Example

```
:CH1:SCAL 1v    /* sets the vertical position of Channel 1 at 1V/div */
:CH1:SCAL?
(The Return Result)  1v
```

v. :CH<n>:OFFSet**Syntax**

```
:CH<n>:OFFSet <offset>
:CH<n>:OFFSet?
```

Description

To set / inquire the vertical offset of the displayed signal from the specified channel.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---|---|
| <n> | Discrete | {1 2 3 4} | 1 |
| <offset> | Real | refer to Explanation (no. of division for vertical offset of the displayed signal from the specified channel) | 1-CH display CH<n>: 0 2-CH display CH1: 2 CH2: -2 |

Explanation

Range -

2mv division: -1000 to 1000
 5mv division: -400 to 400
 10mv division: -200 to 200
 20mv division: -100 to 100
 50mv division: -40 to 40
 100mv division: -200 to 200
 200mv division: -100 to 100
 500mv division: -40 to 40
 1v division: -40 to 40
 2v division: -20 to 20
 5v division: -8 to 8

Return Result

The inquiry returns the division position from zero point, in the form of ASCII string.

Example

:CH1:OFFS 1 /* sets the vertical offset of Channel 1 at 1 div. */

:CH1:OFFS?

(The Return Result) 1.000000e+00

vi. :CH<n>:INVERse

Syntax

:CH<n>:INVERse <bool>

:CH<n>:INVERse?

Description

Turns on/off / inquires the inverse of the displayed channel signal.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-----------|---------|
| <n> | Discrete | {1 2 3 4} | 1 |
| <bool> | Bool | {OFF ON} | OFF |

Return Result

The inquiry returns "OFF", or "ON".

Example

```
:CH1:INVE ON      /* turns the inverse of channel1 on. */
:CH1:INVE?
(The Return Result)  ON
```

:ACQuire command sub-structures

i. :ACQuire:MODE

Syntax

```
:ACQuire:MODE <type>
:ACQuire:MODE?
```

Description

To set / inquire the acquisition mode of the device.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---------------|---------|
| <type> | Discrete | {SAMPlE PEAK} | SAMPlE |

Return Result

The inquiry returns "SAMPlE", or "PEAK".

Example

```
:ACQ:MODE SAMP      /* sets the acquisition mode to sample */
:ACQ:MODE?
(The Return Result)  SAMPlE
```

ii. :ACQuire:DEPMEM

Syntax

```
:ACQuire:DEPMEM <mdep>
:ACQuire:DEPMEM?
```

Description

To set / inquire the stored sampling points captured in one trigger from input signal.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|----------------------|---------|
| <mdep> | Discrete | {1K 10K 100K 1M 10M} | 1K |

Return Result

The inquiry returns the actual quantity of sampling points.

Example

```
:ACQ:DEPMEM 10K /* sets the memory depth to "10K" */
```

```
:ACQ:DEPMEM?
```

(The Return Result) 10K

:TRIGger command sub-structures

i. :TRIGger:STATUS

Syntax

```
:TRIGger:STATUS?
```

Description

Inquires the current trigger status.

Parameter

| Parameter Type | Range | Default |
|----------------|-----------------------|---------|
| Discrete | {AUTO STOP SCAN TRIG} | -- |

Return Result

“AUTO”, or “STOP”, or “SCAN”, or “TRIG”.

Example

```
:TRIG:STATUS?
```

(The Return Result) AUTO

ii. :TRIGger:FORCe

Syntax

```
:TRIGger:FORCe
```

Description

Sets the forced trigger.

Explanation

This command forces the device to acquire the signal, even the currently-set trigger condition hasn't been met.

iii. :TRIGger:HALF

Syntax

:TRIGger:HALF

Description

Sets the trigger level at the vertical mid-point from the amplitude value of the triggered signal.

iv. :TRIGger:TYPE

Syntax

:TRIGger:TYPE <type>

:TRIGger:TYPE?

Description

To set / inquire the current trigger type.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|----------|---------|
| <type> | Discrete | {SINGLE} | SINGle |

Return Result

The inquiry returns the current trigger type.

Example

:TRIG:TYPE SING /* sets the current trigger type to single trigger */

:TRIG:TYPE?

(The Return Result) SINGLE

v. :TRIGger:SINGle

i). :TRIGger:SINGle:MODE <type>

Syntax

:TRIGger:SINGle:MODE <type>

:TRIGger:SINGle:MODE?

Description

To set / inquire the trigger type under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|--------------------------|---------|
| <type> | Discrete | {EDGE VIDeo PULSe SLOPe} | EDGE |

Return Result

The inquiry returns the current trigger type under single trigger condition.

Example

```
:TRIG:SING:MODE EDGE      /* set edge as the current trigger type under single trigger condition. */  
:TRIG:SING:MODE?  
(The Return Result)  EDGE
```

ii). :TRIGger:SINGle:SWEep

Syntax

```
:TRIGger:SINGle:SWEep <mode>  
:TRIGger:SINGle:SWEep?
```

Description

To set / inquire the trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|----------------------|---------|
| <mode> | Discrete | {AUTO NORMAL SINGLE} | AUTO |

Return Result

The query returns the current trigger mode.

Example

```
:TRIG:SING:SWE NORM      /* sets normal as the current trigger mode under single trigger condition. */  
:TRIG:SING:SWE?  
(The Return Result)  NORMAL
```

iii). :TRIGger:SINGle:HOLDoff

Syntax

```
:TRIGger:SINGle:HOLDoff <time>  
:TRIGger:SINGle:HOLDoff?
```

Description

To set / inquire the trigger hold-off time. The default unit reads "s".

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|-------------|---------|
| <time> | Real | 100ns - 10s | 100ns |

Return Result

The inquiry returns the trigger hold-off time, value comes in scientific notation, like 1.000000e+04 .

Example

:TRIG:SING:HOLD 0.001 /* sets the trigger hold-off time at 1ms */

:TRIG:SING:HOLD?

(The Return Result) 1.000000e-03

iv). :TRIGger:SINGle:EDGE

:TRIGger:SINGle:EDGE:SOURce

Syntax

:TRIGger:SINGle:EDGE:SOURce <source>

:TRIGger:SINGle:EDGE:SOURce?

Description

To set / inquire the source of edge trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| <source> | Discrete | {CH1 CH2 CH3 CH4} | CH1 |

Return Result

The inquiry returns "CH1", "CH2", "CH3", or "CH4".

Example

:TRIG:SING:MODE EDGE

:TRIG:SING:EDGE:SOUR CH2 /* sets "CH2" as the source of edge trigger under single trigger condition */

:TRIG:SING:EDGE:SOUR?

(The Return Result) CH2

:TRIGger:SINGle:EDGE:COUPLing

Syntax

:TRIGger:SINGle:EDGE:COUPLing <coupling>
:TRIGger:SINGle:EDGE:COUPLing?

Description

To set / inquire the coupling mode of edge trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|------------|---------|
| <coupling> | Discrete | {DC AC HF} | DC |

Return Result

The inquiry returns "DC", or "AC", or "HF".

Example

:TRIG:SING:MODE EDGE
:TRIG:SING:EDGE:COUP AC /* sets "AC" as the coupling mode of edge trigger under single trigger condition */
:TRIG:SING:EDGE:COUP?
(The Return Result) AC

:TRIGger:SINGle:EDGE:SLOPe

Syntax

:TRIGger:SINGle:EDGE:SLOPe <slope>
:TRIGger:SINGle:EDGE:SLOPe?

Description

To set / inquire the slope status of edge trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------|---------|
| <slope> | Discrete | {RISE FALL} | RISE |

Return Result

The inquiry returns "RISE", or "FALL".

Example

:TRIG:SING:MODE EDGE /* sets edge as trigger mode under single trigger condition */
:TRIG:SING:EDGE:SLOP FALL /* sets "FALL" as the slope of edge trigger under single trigger condition */
:TRIG:SING:EDGE:SLOP?
(The Return Result) FALL

:TRIGger:SINGle:EDGE:LEVel

Syntax

:TRIGger:SINGle:EDGE:LEVel <level>

:TRIGger:SINGle:EDGE:LEVel?

Description

To set / inquire the trigger level of edge trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|------------------------|---------|
| <level> | Real | ±5 Divs - OFFSET (Div) | 0 |

Return Result

The inquiry returns the division position of trigger level, in the form of ASCII string.

Example

```
:TRIG:SING:MODE EDGE /* sets edge as trigger mode under single trigger condition */
:TRIG:SING:EDGE:SOUR CH1 /* sets "CH1" as the source of edge trigger under single trigger condition */
:TRIG:SING:EDGE:LEV 1      /* sets the trigger level at 1 division above zero position*/
:TRIG:SING:EDGE:LEV?
```

(The Return Result) 1

v). **:TRIGger:SINGle:VIDeo**

:TRIGger:SINGle:VIDeo:SOURce

Syntax

:TRIGger:SINGle:VIDeo:SOURce <source>

:TRIGger:SINGle:VIDeo:SOURce?

Description

To set / inquire the source under of video trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| <source> | Discrete | {CH1 CH2 CH3 CH4} | CH1 |

Return Result

The inquiry returns "CH1", "CH2", "CH3", or "CH4".

Example

:TRIG:SING:VID:SOUR CH2 /* sets "CH2" as the source of video trigger under single trigger condition */
:TRIG:SING:VID:SOUR?
(The Return Result) CH2

:TRIGger:SINGle:VIDeo:MODU

Syntax

:TRIGger:SINGle:VIDeo:MODU <standard>
:TRIGger:SINGle:VIDeo:MODU?

Description

To set / inquire video standard of video trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|------------------|---------|
| <standard> | Discrete | {PAL SECam NTSC} | NTSC |

Return Result

The inquiry returns "PAL", or "SECam", or "NTSC".

Example

:TRIG:SING:MODE VID /* sets video as trigger mode under single trigger condition */
:TRIG:SING:VID:MODU NTSC /* selects "NTSC" as the video standard of video trigger under single trigger condition */
:TRIG:SING:VID:MODU?
(The Return Result) NTSC

:TRIGger:SINGle:VIDeo:SYNC

Syntax

:TRIGger:SINGle:VIDeo:SYNC <mode>
:TRIGger:SINGle:VIDeo:SYNC?

Description

To set / inquire the synchronization type of video trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|----------------------------|---------|
| <mode> | Discrete | {LINE FIELD ODD EVEN LNUM} | LINE |

Return Result

The inquiry returns "LINE", or "FIELD", or "ODD", or "EVEN" or "LNUM".

Example

```
:TRIG:SING:MODE VID      /* sets video as trigger mode under single trigger condition */
:TRIG:SING:VID:SYNC ODD  /* selects "ODD" as the synchronization type of video trigger under single trigger
                           condition */

:TRIG:SING:VID:SYNC?
(The Return Result)  ODD
```

:TRIGger:SINGle:VIDeo:LNUM

Syntax

```
:TRIGger:SINGle:VIDeo:LNUM <line>
:TRIGger:SINGle:VIDeo:LNUM?
```

Description

To set / inquire the line number when the synchronization type is “LNUM”, in video trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|---------|--|---------|
| <line> | Integer | NTSC: 1 to 525 PAL: 1 to 625 SECam: 1 to 625 | 1 |

Return Result

The inquiry returns the line number in the form of ASCII string when the synchronization type is “LNUM”, in video trigger mode under single trigger condition.

Example

```
:TRIG:SING:MODE VID      /* sets video as trigger mode under single trigger condition */
:TRIG:SING:VID:LNUM 100  /* sets "100" as the line number when the synchronization type is "LNUM", in video
                           trigger mode under single trigger condition. */

:TRIG:SING:VID:LNUM?
(The Return Result)  100
```

vi). :TRIGger:SINGle:SLOPe

:TRIGger:SINGle:SLOPe:ULevel

Syntax

```
:TRIGger:SINGle:SLOPe:ULevel <volt>
:TRIGger:SINGle:SLOPe:ULevel?
```

Description

To set / inquire the voltage value of the upper limit from the trigger level in slope trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|--|---------|
| <volt> | Real | varies from different voltage division | -- |

Return Result

The inquiry returns the voltage value of the upper limit from the trigger level in slope trigger mode under single trigger condition, value comes in scientific notation, like 1.000000e+04.

Example

```
:TRIG:SING:MODE SLOP /* sets slope as trigger mode under single trigger condition */  
:TRIG:SING:SLOP:UL 1 /* sets the voltage value of the upper limit from the trigger level in slope trigger mode at  
1 division */  
:TRIG:SING:SLOP:UL?  
(The Return Result) 1.000000e-01
```

:TRIGger:SINGle:SLOPe:LLevel

Syntax

```
:TRIGger:SINGle:SLOPe:LLevel <volt>  
:TRIGger:SINGle:SLOPe:LLevel?
```

Description

To set / inquire the voltage value of the lower limit from the trigger level in slope trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|--|---------|
| <volt> | Real | varies from different voltage division | -- |

Return Result

The inquiry returns the voltage value of the lower limit from the trigger level in slope trigger mode under single trigger condition, value comes in scientific notation, like 1.000000e+04.

Example

```
:TRIG:SING:MODE SLOP /* sets slope as trigger mode under single trigger condition */  
:TRIG:SING:SLOP:LL 1 /* sets the voltage value of the lower limit from the trigger level in slope trigger mode at 1  
division */
```

:TRIG:SING:SLOP:LL?

(The Return Result) 1.000000e-01

:TRIGger:SINGle:SLOPe:SOURce**Syntax**

```
:TRIGger:SINGle:SLOPe:SOURce <source>
:TRIGger:SINGle:SLOPe:SOURce?
```

Description

To set / inquire the trigger source in slope trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| <source> | Discrete | {CH1 CH2 CH3 CH4} | CH1 |

Return Result

The inquiry returns "CH1", "CH2", "CH3", or "CH4".

Example

```
:TRIG:SING:SLOP:SOUR CH2 /* sets "CH2" as the trigger source in slope trigger mode under single
trigger condition */
:TRIG:SING:SLOP:SOUR?
(The Return Result) CH2
```

:TRIGger:SINGle:SLOPe:TIME**Syntax**

```
:TRIGger:SINGle:SLOPe:TIME <time>
:TRIGger:SINGle:SLOPe:TIME?
```

Description

To set / inquire the time parameter in slope trigger mode under single trigger condition

Parameter

| Parameter Name | Type | Range | Default |
|----------------|--------|-------------|---------|
| <time> | String | 30ns to 10s | 30ns |

Return Result

The inquiry returns the time in slope trigger mode under single trigger condition, value comes in scientific notation, like 1.000000e+04.

Example

```
:TRIG:SING:MODE SLOP      /* sets slope as trigger mode under single trigger condition */  
:TRIG:SING:SLOP:TIME 1ms  /* sets the slope trigger time at 1ms */  
:TRIG:SING:SLOP:TIME?  
(The Return Result) 1.000000e-03
```

:TRIGger:SINGle:SLOPe:WHEN

Syntax

```
:TRIGger:SINGle:SLOPe:WHEN <when>  
:TRIGger:SINGle:SLOPe:WHEN?
```

Description

To set / inquire the trigger condition of the slope trigger, in slope trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---|----------|
| <when> | Discrete | {PGReater PLESs PGLess NGReater NLESs NGLess} | PGReater |

Return Result

The inquiry returns PGReater, or PLESs, or NGReater, or NLESs, or PGLess, or NGLess.

Explanation

PGReater: With given time parameter, the trigger happens when the positive slope time of the input signal larger than the given time.

PLESs: With given time parameter, the trigger happens when the positive slope time of the input signal smaller than the given time.

PGLess: With given time upper limit and lower limit, the trigger happens when the positive slope time of the input signal lager than given time lower limit, and smaller than given time upper limit.

NGReater: With given time parameter, the trigger happens when the negative slope time of the input signal larger than the given time.

NLESs: With given time parameter, the trigger happens when the negative slope time of the input signal smaller than the given time.

NGLess: With given time upper limit and lower limit, the trigger happens when the negative slope time of the input signal lager than given time lower limit, and smaller than given time upper limit.

Example

```
:TRIG:SING:MODE SLOP      /* sets slope as trigger mode under single trigger condition */  
:TRIG:SING:SLOP:WHEN PLES  /* sets the slope trigger condition to PLESs*/
```

:TRIG:SING:SLOP:WHEN?

(The Return Result) PLESs

vii). :TRIGger:SINGle:PULSe**:TRIGger:SINGle:PULSe:SOURce****Syntax****:TRIGger:SINGle:PULSe:SOURce <source>****:TRIGger:SINGle:PULSe:SOURce?****Description**

To set / inquire the trigger source of the pulse trigger under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| <source> | Discrete | {CH1 CH2 CH3 CH4} | CH1 |

Return Result

The inquiry returns "CH1", "CH2", "CH3", or "CH4".

Example**:TRIG:SING:PULS:SOUR CH2** /* sets "CH2" as the trigger source of the pulse trigger under single trigger condition */**:TRIG:SING:PULS:SOUR?**

(The Return Result) CH2

:TRIGger:SINGle:PULSe:TIME**Syntax****:TRIGger:SINGle:PULSe:TIME <time>****:TRIGger:SINGle:PULSe:TIME?****Description**

To set / inquire the time parameter of the pulse width in pulse trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|--------|-------------|---------|
| <time> | String | 30ns to 10s | 30ns |

Return Result

The inquiry returns the time parameter of the pulse width in pulse trigger mode under single trigger condition, value comes in scientific notation, like 1.000000e+04.

Example

```
:TRIG:SING:MODE PULS      /* sets pulse as trigger mode under single trigger condition */
:TRIG:SING:PULS:TIME 1ms /* sets the pulse width time in pulse trigger mode at 1ms */
:TRIG:SING:PULS:TIME?
(The Return Result) 1.000000e-03
```

:TRIGger:SINGle:PULSe:COUPLing

Syntax

```
:TRIGger:SINGle:PULSe:COUPLing <coupling>
:TRIGger:SINGle:PULSe:COUPLing?
```

Description

To set / inquire the coupling of pulse width trigger in pulse trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|------------|---------|
| <coupling> | Discrete | {DC AC HF} | DC |

Return Result

The inquiry returns "DC", or "AC", or "HF".

Example

```
:TRIG:SING:MODE PULS      /* sets pulse as trigger mode under single trigger condition */
:TRIG:SING:PULS:COUP AC    /* sets the coupling of pulse width trigger to AC */
:TRIG:SING:PULS:COUP?
(The Return Result) AC
```

:TRIGger:SINGle:PULSe:WHEN

Syntax

```
:TRIGger:SINGle:PULSe:WHEN <when>
:TRIGger:SINGle:PULSe:WHEN?
```

Description

To set / inquire the coupling condition of pulse width trigger in pulse trigger mode under single trigger condition.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---|----------|
| <when> | Discrete | {PGReater PLESs PGLess NGReater NLESs NGLess} | PGReater |

Return Result

The inquiry returns PGReater, PLESs, NGReater, NLESs, PGLess, or NGLess.

Explanation

PGReater: With given pulse width, the trigger happens when the positive pulse width of the input signal larger than the given pulse width.

PLESs: With given pulse width, the trigger happens when the positive pulse width of the input signal smaller than the given pulse width.

PGLess: With given upper and lower pulse width, the trigger happens when the positive pulse width of the input signal lager than given lower pulse width, and smaller than given upper pulse width.

NGReater: With given pulse width, the trigger happens when the negative pulse width of the input signal larger than the given pulse width.

NLESs: With given pulse width, the trigger happens when the negative pulse width of the input signal smaller than the given pulse width.

NGLess: With given upper and lower pulse width, the trigger happens when the negative pulse width of the input signal lager than given lower pulse width, and smaller than given upper pulse width.

Example

```
:TRIG:SING:MODE PULS      /* sets pulse as trigger mode under single trigger condition */
:TRIG:SING:PULS:WHEN PLES /* sets the coupling condition of pulse width trigger to PLESs */
:TRIG:SING:PULS:WHEN?
(The Return Result)  PLESs
```

:LAN command sub-structures

i. :LAN:DEVice

Syntax

```
:LAN:DEVice <string>
:LAN:DEVice?
```

Description

To set / inquire the current network communication interface.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| string | Discrete | {eth0 eth1 wlan0} | eth0 |

Return Result

The inquiry returns "eth0", or "eth1", or "wlan0".

Example

```
:LAN:DEV eth0    /* set the current network communication interface to eth0. */  
:LAN:DEV?  
(The Return Result) eth0
```

ii. :LAN:PROTocol

Syntax

```
:LAN:PROTocol <device>  
:LAN:PROTocol?
```

Description

To set / inquire the method to get the network IP.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---------------|---------|
| <device> | Discrete | {STATIC DHCP} | STATIC |

Return Result

The inquiry returns "STATIC", or "DHCP".

Example

```
:LAN:PROT STATIC    /* sets the method to get network IP to STATIC */  
:LAN:PROT?  
(The Return Result) STATIC
```

iii. :LAN:IPADDress

Syntax

```
:LAN:IPADDress <string>  
:LAN:IPADDress?
```

Description

To set / inquire the IP address of the device.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|--------------|-----------------------------|---------------|
| <string> | ASCII String | refer to Explanation | 192.168.1.172 |

Explanation

The <string> goes in nnn.nnn.nnn.nnn (like 192.168.1.172), the first nnn ranges from 0 till 223 (excl. 127), the other three nnn ranges from 0 till 255. This command line works for STATIC IP address configuration mode.

Return Result

The inquiry returns the current IP address in the form of ASCII string.

Example

```
:LAN:PROT STATIC      /* sets the method to get network IP to STATIC */  
:LAN:IPAD 192.168.1.10 /* sets the IP address at 192.168.1.10 */  
:LAN:IPAD?  
(The Return Result) 192.168.1.10
```

iv. :LAN:MASK

Syntax

```
:LAN:MASK <string>  
:LAN:MASK?
```

Description

To set / inquire the subnet mask.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|--------------|-----------------------------|---------------|
| <string> | ASCII String | refer to Explanation | 255.255.255.0 |

Explanation

The <string> goes in nnn.nnn.nnn.nnn (like 255.255.255.0), each nnn ranges from 0 till 255. This command line works for STATIC IP address configuration mode.

Return Result

The inquiry returns the current subnet mask in the form of ASCII string.

Example

```
:LAN:PROT STATIC      /* sets the method to get network IP to STATIC */  
:LAN:MASK 255.255.0.0 /* sets the subnet mask at 255.255.0.0 */  
:LAN:MASK?  
(The Return Result) 255.255.0.0
```

v. :LAN:GATEway

Syntax

:LAN:GATEway <string>
:LAN:GATEway?

Description

To set / inquire the current gateway.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|--------------|-----------------------------|-------------|
| <string> | ASCII String | refer to Explanation | 192.168.1.1 |

Explanation

The <string> goes in nnn.nnn.nnn.nnn (like 192.168.1.1), the first nnn ranges from 0 till 223 (excl. 127), the other thee nnn ranges from 0 till 255.

Return Result

The inquiry returns the current gateway in the form of ASCII string.

Example

:LAN:GAT 192.168.1.1 /* sets the gateway at 192.168.1.1 */
:LAN:GAT?
(The Return Result) 192.168.1.1

vi. :LAN:DNS

Syntax

:LAN:DNS <string>
:LAN:DNS?

Description

To set / inquire the current DNS address.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|--------------|-----------------------------|-------------|
| <string> | ASCII String | refer to Explanation | 192.168.1.1 |

Explanation

The <string> goes in nnn.nnn.nnn.nnn (like 192.168.1.1), the first nnn ranges from 0 till 223 (excl. 127), the other thee nnn ranges from 0 till 255.

Return Result

The inquiry returns the current DNS address in the form of ASCII string.

Example

:LAN:DNS 192.168.1.1 /* sets the DNS address to 192.168.1.1 */

:LAN:DNS?

(The Return Result) 192.168.1.1

vii.:LAN:MAC

Syntax

:LAN:MAC?

Description

To inquire the MAC address of the device.

Return Result

The inquiry returns the MAC address 0019AF300000 and (00-19-AF-30-00-00) in the form of ASCII string.

:WAVEform command sub-structures

i. :WAVEform:DATA

Syntax

:WAVEform:DATA?

Description

To read the processed data (data processed by interpolation, or compression).

Explanation

The read data format goes in the length of the TMC header + data packet.

The TMC header comes in the form of #NXXXXXX, among which, “#” is the standard header ID, “N” indicates the bytes quantity, to describe the length of the data packet in the form of ASCII string.

Return Result

The read data consists of two parts - TMC header and data packet, like #900000ddddXXXX..., among which, “dddd” indicates the length of the valid data packet in the data stream.

When reading memory data, each time's read-back data may be only one sector from memory. The read-back data by sectors, the beginning of each sector gets a descriptor like #9XXXXXXXXX, among which, “XXXXXXXXX” reflects the data packet length in this transferring sector. The read-back data between two adjacent sectors is consecutive. Giving an example,

The read data by one time is #9000001024XXXX: among which, “9” indicates the bytes quantity, “000001024” describes the length of the waveform (input signal) data, say, 1024 bytes. The value of “N” calculated by introducing 2 functions: "partial string" and "decimal numeric string to numeric conversion".

Example

:WAVEform:DATA? /* reads the processed data */

(The Return Result) The data packet with TMC header, like #9000003040... (could refer to [7.](#)

[Supplement: WAVEform:DATA? Return Result](#) for details).

ii. the combination of commands to read the original data

the combination of commands covers -

:WAVEform:BEGin
:WAVEform:PREamble
:WAVEform:RANGE
:WAVEform:FETCh
:WAVEform:END

Note: The original data here, and hereinafter means the captured data without processing.

:WAVEform:BEGin

Syntax

:WAVEform:BEGin <CHn>

Description

To start reading the original data.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| <CHn> | Discrete | {CH1 CH2 CH3 CH4} | -- |

:WAVEform:PREamble

Syntax

:WAVEform:PREamble?

Explanation

To inquire all of the waveform parameters.

The read data format goes in the length of the TMC header + data packet.

The TMC header comes in the form of #NXXXXXXX, among which, “#” is the standard header ID, “N” indicates the bytes quantity, to describe the length of the data packet in the form of ASCII string.

Return Result

The inquiry returns the waveform parameter.

The read data consists of two parts - TMC header and data packet, like #900000ddddXXXX..., among which, “dddd” reflects the length of the valid data packet in the data stream, “XXXX...” indicates the data from the data packet, which plays the role of waveform parameter (could refer to [7. Supplement: WAveform:DATA? Return Result](#) for details).

:WAveform:RANGE

Syntax

:WAveform:RANGE <offset>,<size>

Description

To set/ read the offset and data length from the original data.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|---------|----------|---------|
| <offset> | Integer | 0M - 10M | -- |
| <size> | Integer | 1 - 256k | -- |

:WAveform:FETCH

Syntax

:WAveform:FETCH?

Description

To read the original data, the PC keeps reading the data at certain length one time until the ending of data.

Return Result

The inquiry returns waveform data.

The read data consists of two parts - TMC header and data packet, like #900000ddddXXXX..., among which, “dddd” reflects the length of the valid data packet in the data stream, “XXXX...” indicates the data from the data packet, every 2 bytes forms one effective data, to be 16-bit signed integer data (could refer to [iv. Calculation Tips Towards Waveform Data](#) under [7. Supplement: WAveform:DATA? Return Result](#) for details).

:WAveform:END

Syntax

:WAveform:END

Description

To stop reading the waveform data.

Via following 3 examples, to know the application of this combination of commands -

Example 1. to read the original data of 10k length from Channel 1

```
:WAV:BEG CH1          /* to start reading the original data from CH1 */
:WAV:PRE?              /* to inquire the waveform parameters (this line not a must provided only need to
read the data) */
:WAV:RANG 0,10000     /* to set/ read the offset and data length from the original data */
:WAV:FETC?             /* to read the original data */
:WAV:END               /* to stop reading the original data, and to unlock the protection of data
consistency */
```

Example 2. to read the original data of 100k length from CH1 / CH2 / CH3 / CH4* at the same time

```
:WAV:BEG CH1          /* to start reading the original data from CH1 */
:WAV:PRE?              /* to inquire the waveform parameters (this line not a must provided only need to
read the data) */
:WAV:RANG 0,100000    /* to set/ read the offset and data length from the original data */
:WAV:FETC?             /* to read the original data */
:WAV:BEG CH2          /* to start reading the original data from CH2 */
:WAV:RANG 0,100000    /* to start reading the original data from CH3 */
:WAV:FETC?             /* to start reading the original data from CH4 */
:WAV:RANG 0,100000    /* to start reading the original data from CH4 */
:WAV:FETC?             /* to stop reading the original data, and to unlock the protection of data
consistency */
```

Example 3. at deep memory status, to read the original data of 10M length from CH2

Note: The max data length that the device reads per time is 256k.

```
:WAV:BEG CH2          /* to start reading the original data from CH2 */
:WAV:PRE?              /* to inquire the waveform parameters (this line not a must provided only
need to read the data) */
:WAV:RANG 0,200000    /* to set/ read the offset and data length from the original data */
:WAV:FETC?             /* to read the original data */
:WAV:RANG 200000,200000 /* to read the original data from the position of 200k length till 400k length */
:WAV:FETC?             /* to read the original data from the position of 400k length till 600k length */
:WAV:FETC?             /* to read the original data from the position of 600k length till 800k length */
:WAV:FETC?             /* multi-times :WAV:RANG XXXXXXXX, 200000 */ {XXXXXXX goes like
the previous no. at the same position adds 200000}
:WAV:RANG 9600000,200000
:WAV:FETC?
:WAV:RANG 9800000,200000
:WAV:FETC?
:WAV:END               /* to stop reading the original data, and to unlock the protection of data
consistency */
```

:MEASure command sub-structures

i. :MEASure:DISPlay

Syntax

:MEASure:DISPlay <bool>

:MEASure:DISPlay?

Description

To turn on/off the display of channel signal measurement.

To inquire the display status of channel signal measurement.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|----------|---------|
| <bool> | Bool | {ON OFF} | OFF |

Return Result

The inquiry returns "ON", or "OFF".

Example

:MEAS:DISP ON /* turns on the display of channel signal measurement */

:MEAS:DISP?

(The Return Result) ON

ii. :MEASure:TIMer

Syntax

:MEASure:TIMer <value>

:MEASure:TIMer?

Description

To set / inquire the time interval of signal measurement.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|------|---------|---------|
| <value> | Real | {20ms-} | 200ms |

Return Result

The inquiry returns the time interval of signal measurement, value comes in scientific notation, like 1.000000e+04.

Example

:MEAS:TIM 0.2 /* sets the time interval of signal measurement at 0.2S*/

:MEAS:TIM?

(The Return Result) 2.000000e-01

iii. :MEASure:SOURce

Syntax

```
:MEASure:SOURce <CHn>  
:MEASure:SOURce?
```

Description

To set or inquire the signal source of the current measurement.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|-------------------|---------|
| <CHn> | Discrete | {CH1 CH2 CH3 CH4} | CH1 |

Return Result

The inquiry returns the signal source of the current measurement, "CH1", or "CH2".

Example

```
:MEAS:SOUR CH2    /*sets CH2 as the signal source of the current measurement */  
:MEAS:SOUR?  
(The Return Result) CH2
```

iv. :MEASure:OVERflow

Syntax

```
:MEASure:OVERflow?
```

Description

To inquire whether there is overflow for the ADC data on which the measurement calculation is based.

Return Format

The inquiry returns "TRUE" (there is overflow), or "FALSE" (there isn't overflow).

Example

```
:MEAS:OVER?    /* inquires whether there is overflow for the measured ADC (suppose now there isn't  
overflow) */  
(The Return Result) FALSE
```

v. :MEASure:<items>

Syntax

```
:MEASure:<items>?
```

Description

To inquire the value of the current channel measurement, which has been used for device's most basic measurement. The measurement result comes in scientific notation, on condition that the measurement value not possible to be calculated, the return result goes in 9.900000e+36.


Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---|---------|
| <items> | Discrete | {VMAX VMIN VPP VTOP VBASE VAMP VAVG VRMS CRMS OVERshoot PRESHoot PERiod FREQuency RTIMe FTIMe PWIDth NWIDth AREA CARReal PDUTy NDUTy PPULsecount NPULsecount REDGecount FEDGecount} | -- |

full meaning to Range items -

| item | note | unit | item | note | unit |
|-----------|-----------------------|------|-------------|---------------------------|------|
| VMAX | maximum value | V | PERiod | cycle | s |
| VMIN | minimum value | V | FREQuency | frequency | Hz |
| VPP | peak to peak | V | RTIMe | rise time | s |
| VTOP | top value | V | FTIMe | fall time | s |
| VBASE | bottom value | V | PWIDth | positive pulse width time | s |
| VAMP | amplitude value | V | NWIDth | negative pulse width time | s |
| VAVG | average value | V | AREA | area | Vs |
| VRMS | valid value | V | CARReal | cycle area | Vs |
| CRMS | cycle effective value | V | PPULsecount | positive pulse number | One |
| OVERshoot | data overshoot | 100% | NPULsecount | number of negative pulses | One |
| PRESHoot | data pre-shoot | 100% | REDGecount | number of rising edges | One |
| PDUTy | positive duty cycle | 100% | FEDGecount | number of falling edges | One |
| NDUTy | negative duty cycle | 100% | | | |

the measurement item from voltage parameter -

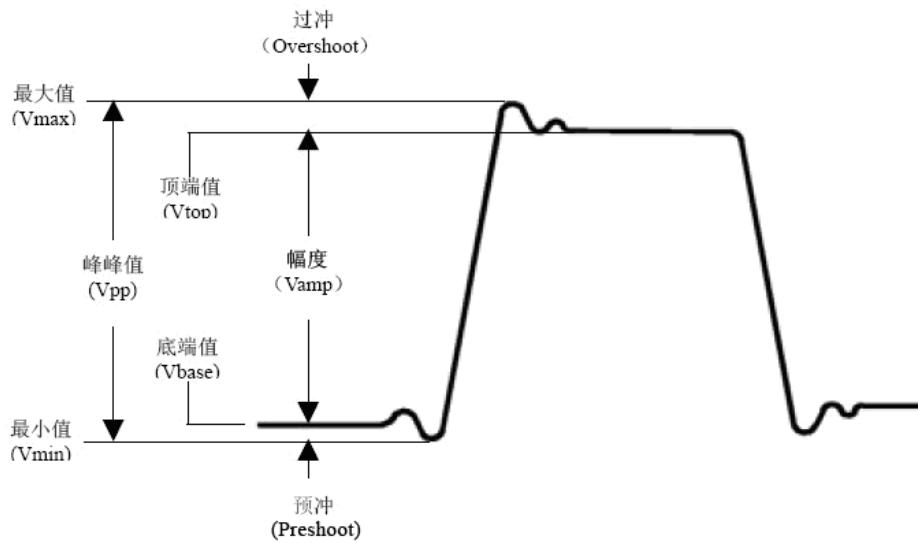

Average: The arithmetic mean value over the full waveform or chosen area.

Peak-to-peak (Vpp): The voltage value between upper peak and lower peak from measured signal.

Root Mean Square Value (Vrms): The accurate “root mean square” voltage over the full waveform or chosen area.

Maximum value (Vmax): The voltage value between upper peak and ground (GND).

Minimum value (Vmin): The voltage value between lower peak and ground (GND).

Top value (Vtop): The voltage value between flat top and ground (GND).

Bottom value (Vbase): The voltage value between flat base and ground (GND).


Amplitude (Vamp): The voltage value between flat top and flat base from measured signal.

Overshoot: Equals $(V_{max} - V_{top}) / V_{amp}$.

Preshoot: Equals $(V_{min} - V_{base}) / V_{amp}$.

Cycle rms: The root mean square value calculated by the first complete waveform cycle.

the measurement item from time parameter -

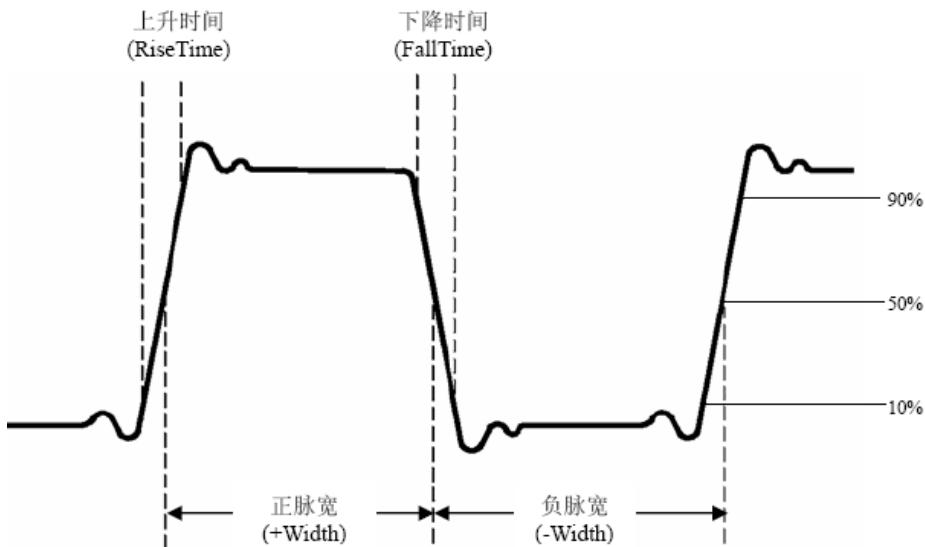

RiseTime: The time span for signal amplitude rise from 10% to 90%, judged by the rising edge of its first pulse.

Fall Time: The time span for signal amplitude fall from 90% to 10%, judged by the falling edge of its first pulse.

Positive Pulse Width (+Width): The pulse width that the first positive pulse at 50% amplitude point.

Negative pulse width (-Width): The pulse width that the first negative pulse at 50% amplitude point.

Positive Duty Cycle (+Duty): Equals the value of +Width / Period.

Negative Duty Cycle (-Duty): Equals the value of -Width / Period.

other measurements -

number of positive pulses: Within the chosen waveform area, the quantity of positive pulses moved above the middle-cross-reference-pulse.

Number of negative pulses: Within the chosen waveform area, the quantity of negative pulses moved below the middle-cross-reference-pulse.

Number of rising edges: Within the chosen waveform area, the quantity of times for rising edge transited from the low reference value to the high reference value by positive.

Number of falling edges: Within the chosen waveform area, the quantity of times for falling edge transited from the high reference value to the low reference value by negative.

Area: The area of the full waveform within main display, its unit in volt-seconds. The measured area above the zero point (vertical offset) is positive, the measured area below the zero point is negative. The measured area equals the algebraic sum of the full waveform area within main display.

Period Area: The area of the first period from the displayed waveform, its unit in volt-seconds. The measured area above the zero point (vertical offset) is positive, the measured area below the zero point is negative. The measured area equals the algebraic sum of the entire period area.

Note: When the displayed waveform less than one period, the measured period area will be zero.

Example

```
:MEASure:PERiod?          /* to inquire the cycle of current channel */  
(The Return Result) 2.000000e-03
```

vi. :MEASure:<items> ? <cha>,<chb>

Syntax

```
:MEASure:<items> ? <cha>,<chb>
```

Description

To inquire the value of the measurement between channels. The measurement result comes in scientific notation, on condition that the measurement value not possible to be calculated, the return result goes in 9.900000e+36.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|----------|---|---------|
| <items> | Discrete | {RDELay FDELay RPHase FPHase FRRDelay FRFDelay FFRDelay FFFDelay LRRDelay LRFDelay LFRDelay LFFDelay} | -- |
| <cha> | Discrete | {1 2 3 4} | -- |

| | | | |
|-------|----------|-----------|----|
| <chb> | Discrete | {1 2 3 4} | -- |
|-------|----------|-----------|----|

full meaning to Range items -

| items | note | unit |
|----------|---|------|
| RDEDelay | cha rising edge to chb rising edge time | s |
| FDEDelay | cha falling edge to chb falling edge time | s |
| RPHase | cha rising edge to chb rising edge phase | ° |
| FPHase | cha falling edge to chb falling edge phase | ° |
| FRRDelay | cha first rising edge to chb first rising edge time | s |
| FRFDelay | cha first rising edge to chb first falling edge time | s |
| FFRDelay | cha first falling edge to chb first rising edge time | s |
| FFFDelay | cha first falling edge to chb first falling edge time | s |
| LRRDelay | cha first rising edge to chb last rising edge time | s |
| LRFDelay | cha first rising edge to chb last falling edge time | s |
| LFRDelay | cha first falling edge to chb last rising edge time | s |
| LFFDelay | cha first falling edge to chb last falling edge time | s |

Example

```
:MEASure:RDEDelay? ch1,ch2 /* to inquire the time from the rising edge of CH1 to the rising edge of CH2*/
(The Return Result) 5.000000e-04
```

Other Commands

i. :AUToset

Syntax

```
:AUToset
:AUToset:PROGress?
```

Description

To do autoset.

To inquire whether autoset been fulfilled.

Parameter

Nil.

Return Result

The inquiry returns the no. from 1 till 100, when returns 100, it means the full process done.

ii. :CALibrate

Syntax

:CALibrate
:CALibrate:PROGress?

Description

To perform self-calibration.
To inquire whether self-calibration been fulfilled.

Parameter

Nil.

Return Result

The inquiry returns the no. from 1 till 100, when returns 100, it means the full process done.

iii. :RUN

Syntax

:RUN

Description

To start running the device.

Extension

The :STOP command could be introduced to stop the device running.

iv. :STOP

Syntax

:STOP

Description

To stop the device running.

Extension

The :RUN command could be introduced to start running the device.

v. :LAN:PORT

Syntax

:LAN:PORT<port>
:LAN:PORT?

Description

To set / inquire the LAN port number.
This command also works for inquiring WLAN port number.

Parameter

| Parameter Name | Type | Range | Default |
|----------------|---------|-----------|---------|
| < port> | Integer | {0~65535} | 8866 |

Return Result

The inquiry returns the current port number, in the form of ASCII string.

Example

:LAN:PORT 2000 /* sets the LAN port to 2000 */

:LAN:PORT?

(The Return Result) 2000

4. Supplement: Sampling Rate Conversion Rule

Sampling Rate: According to the time base and recording length, the device works under the proper sampling rate automatically.

i. sampling rate conversion rule -

When max. sampling rate > sampling points per division / time base,

Sampling Rate = sampling points per division / time base ;

When max. sampling Rate < sampling points per division / time base,

Sampling Rate = max. sampling rate

ii. max. sampling rate available -

vertical resolution available in 8-bit;

channel running status: 1-CH / 2-CH / more than 2-CH

| max. sampling rate | 8-bit | 12-bit | 14-bit |
|--------------------|-----------|-----------|-----------|
| 1-CH | 1G Sa/s | 500M Sa/s | 100M Sa/s |
| 2-CH | 500M Sa/s | 250M Sa/s | 100M Sa/s |
| more than 2-CH | 250M Sa/s | 100M Sa/s | 100M Sa/s |

iii. sampling rate details -

| sampling rate (Sa/s) | 1G | 500M | 250M | 100M | 50M | 25M |
|-------------------------|------|------|------|------|------|------|
| | 10M | 5M | 2.5M | 1M | 500k | 250k |
| | 100k | 50k | 25k | 10k | 5k | 2.5k |
| | 1k | 500 | 250 | 100 | 50 | 25 |
| | 10 | 5 | 2.5 | 1 | 0.5 | |
| | | | | | | |

iv. sampling points per division VS different recording length -

| recording length | 1k | 10k | 100k | 1M | 10M |
|------------------------------|----|-----|------|-----|------|
| sampling points per division | 50 | 500 | 5k | 50k | 500k |

v. time base details -

| time base (s/div) | 2.0ns/div | 5.0ns/div | 10ns/div | 20ns/div | 50ns/div | 100ns/div |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| | 200ns/div | 500ns/div | 1.0us/div | 2.0us/div | 5.0us/div | 10us/div |
| | 20us/div | 50us/div | 100us/div | 200us/div | 500us/div | 1.0ms/div |
| | 2.0ms/div | 5.0ms/div | 10ms/div | 20ms/div | 50ms/div | 100ms/div |
| | 200ms/div | 500ms/div | 1.0s/div | 2.0s/div | 5.0s/div | 10s/div |
| | 20s/div | 50s/div | 100s/div | | | |
| | | | | | | |

5. Supplement: WAVEFORM:DATA? Return Result

i. empty data packet content parsing

(little endian mode, low byte been allocated in low address)

| Sequence No. | Offset (unit: byte) | No. of Bytes | Value or Range | Description |
|--------------|---------------------|--------------|--------------------|---|
| 0 | TMC | N+2 | #NXXXXXX | "#" is the standard header ID, "N" indicates the bytes quantity, to describe the length of the data packet in the form of ASCII string. |
| 1 | 0 | 8 | 0x090906060A0A0550 | starts synchronization and verification |
| 2 | 8 | 2 | 0 - 255 | dynamic synchronization check (echo to the end) |
| 3 | 10 | 2 | 0 - 65535 | N1 - no. of bytes that parameter gets |
| 4 | 12 | 2 | 0 - 5 | running status: 0 - Auto, 1 - Trig'd, 2 - Stop, 3 - Ready, 4 - Scan, 5 - Error |
| 5 | 14 | 2 | | |
| 6 | 16 | 2 | 0 - 4 | -1 (FFFF) |
| 25 | N1+N2+N3 +16 | 2 | 0 - 255 | dynamic synchronization check ends (echo to the beginning) |
| 26 | N1+N2+N3+18 | 8 | 0x0906060905A0050A | synchronization and verification ends |

ii. effective data packet content parsing

(little endian mode, low byte been allocated in low address)

| Sequence No. | Offset (unit: byte) | No. of Bytes | Value or Range | Description |
|--------------|---------------------|--------------|--------------------|--|
| 0 | TMC | N+2 | #NXXXXXX | "#" is the standard header ID, "N" indicates the bytes quantity, to describe the length of the data packet in the form of ASCII string. |
| 1 | 0 | 8 | 0x090906060A0A0550 | starts synchronization and verification |
| 2 | 8 | 2 | 0 - 255 | dynamic synchronization check (echo to the end) |
| 3 | 10 | 2 | 0 - 65535 | N1 - no. of bytes that parameter gets |
| 4 | 12 | 2 | 0 - 5 | running status: 0 - Auto, 1 - Trig'd, 2 - Stop, 3 - Ready, 4 - Scan, 5 - Error |
| 5 | 14 | 2 | 0 - 16 | available vertical resolution: 8 - 8-bit |
| 6 | 16 | 2 | 0 - 4 | n1 - no. of waveform channels in the data (max. 4) (FFFF indicates empty data packets / no new data / discarded data) |
| 7 | 18 | 4 | 0 - 4G | n2 - no. of waveform data points per channel |
| 8 | 22 | 2 | 0 - 65535 | n3 - no. of waveform overlaps, N2 = n3*n1*(n2*2+2) |
| 9 | 24 | 2 | 0 - 1 | Reserved (n4) |
| 10 | 26 | 4 | 0 - 4G | Reserved (n5) N3 = n4*(n5*2+2) |
| 11 | 30 | 2 | 0 - 255 | waveform forming method: 0 - normal (point by point); 1 - compressed (four-point by four-point); 2 - discrete (discrete); 3 - Vpp normal mode; 4 - Vpp discrete mode; 255 - reading the recorded data. |
| 12 | 32 | 2 | 0 - 1 | 0 - normal; 1 - scan |
| 13 | 34 | 4 | 0 - 4G | no. of scrolling data in scan mode (calculated by deep memory) |

| | | | | |
|----|-------------|------|--------------------|---|
| 14 | | | | reserved (other accompanying information from data packet) |
| 15 | N1+10 | 2 | | reserved |
| 16 | N1+12 | 2 | 0 - 3 | which channel does the first segment waveform data come from |
| 17 | N1+14 | n2*2 | | first segment waveform data area |
| 18 | N1+14+n2*2 | 2 | 0 - 3 | which channel does the second segment waveform data come from |
| 19 | N1+16+n2*2 | n2*2 | | second segment waveform data area |
| 20 | | | | |
| 21 | | | CH1 - 0 CH2 - 1 | second overlap which channel does the first segment waveform data come from first segment waveform data area which channel does the n1 segment waveform data come from the n1 segment waveform data area n3th overlap which channel does the first segment waveform data come from first segment waveform data area which channel does the n1 segment waveform data come from the n1 segment waveform data area |
| 22 | N1+N2+12 | 4 | 0x0A0A0550 | starts synchronization and verification, data separator reserved |
| 23 | N1+N2+16 | 2 | 0 - 4 | reserved |
| 24 | N1+N2+18 | n5*2 | | reserved |
| 25 | N1+N2+N3+16 | 2 | 0 - 255 | dynamic synchronization check ends (echo to the beginning) |
| 26 | N1+N2+N3+18 | 8 | 0x0906060905A0050A | synchronization and verification ends |

iii. other accompanying information from data packet

(little endian mode, low byte been allocated in low address)

| Sequence No. | Offset (unit: byte) | No. of Bytes | Value or Range | Description |
|--------------|---------------------|--------------|----------------|--|
| 14 | 38 | 4 | Integer | the count value of frequency counter from CH1 signal |
| | 42 | 4 | Integer | the count value of frequency counter from CH2 signal |
| | 46 | 4 | Integer | the count value of frequency counter from CH3 signal |
| | 50 | 4 | Integer | the count value of frequency counter from CH4 signal |
| | 54 | 4 | Integer | the reference count value of CH1 frequency counter |
| | 58 | 4 | Integer | the reference count value of CH2 frequency counter |
| | 62 | 4 | Integer | the reference count value of CH3 frequency counter |
| | 66 | 4 | Integer | the reference count value of CH4 frequency counter |
| | 70 | 2 | D(3..0) | overflow flag (0: normal; 1: overflow) D0 - CH1; D1 - CH2; D2 - CH3; D3 - CH4 |

| | | | | |
|-------|-----|---|----------|--|
| | 72 | 2 | ADC Data | CH1 minimum value (16-bit ADC data format) |
| | 74 | 2 | ADC Data | CH2 minimum value (16-bit ADC data format) |
| | 76 | 2 | ADC Data | CH3 minimum value (16-bit ADC data format) |
| | 78 | 2 | ADC Data | CH4 minimum value (16-bit ADC data format) |
| | 80 | 2 | ADC Data | CH1 maximum value (16-bit ADC data format) |
| | 82 | 2 | ADC Data | CH2 maximum value (16-bit ADC data format) |
| | 84 | 2 | ADC Data | CH3 maximum value (16-bit ADC data format) |
| | 86 | 2 | ADC Data | CH4 maximum value (16-bit ADC data format) |
| | 88 | 2 | ADC Data | CH1 average value (16-bit ADC data format) |
| | 90 | 2 | ADC Data | CH2 average value (16-bit ADC data format) |
| | 92 | 2 | ADC Data | CH3 average value (16-bit ADC data format) |
| | 94 | 2 | ADC Data | CH4 average value (16-bit ADC data format) |
| | 96 | 2 | D(15..0) | channel trigger type (0: edge; 1: video) D3..0 - CH1; D7..4 - CH2; D11..8 - CH3; D15..12 - CH4 |
| | 98 | 4 | Integer | system clock (unit in 1 Hz) |
| | | | | |
| | 256 | 4 | | data acquisition synchronization ID (whether data packet content qualified for requested sequence) |
| | 260 | 2 | 2mV - 5V | CH1 voltage division from the acquired data (index value 0 - 1mV, 9 - 1V) |
| | 262 | 2 | 2mV - 5V | CH2 voltage division from the acquired data (index value 0 - 1mV, 9 - 1V) |
| | 264 | 2 | 2mV - 5V | CH3 voltage division from the acquired data (index value 0 - 1mV, 9 - 1V) |
| | 266 | 2 | 2mV - 5V | CH4 voltage division from the acquired data (index value 0 - 1mV, 9 - 1V) |
| | 268 | 4 | Float | CH1 zero position from the acquired data (floating-point, unit in division) |
| | 272 | 4 | Float | CH2 zero position from the acquired data (floating-point, unit in division) |
| | 276 | 4 | Float | CH3 zero position from the acquired data (floating-point, unit in division) |
| | 280 | 4 | Float | CH4 zero position from the acquired data (floating-point, unit in division) |
| | 284 | 2 | D(15..0) | channel working status (0: OFF; 1: ON) D3..0 - CH1; D7..4 - CH2; D11..8 - CH3;..... |
| | 286 | 2 | D(15..0) | channel coupling mode (0: AC; 1: DC; 2: GND) D3..0 - CH1; D7..4 - CH2; D11..8 - CH3;..... |
| | 288 | 2 | D(15..0) | bandwidth limit setting (0: full bandwidth; 1: 20M) D3..0 - CH1; D7..4 - CH2; D11..8 - CH3;..... |
| | 290 | 2 | D(15..0) | analog front end attenuation factor adjustment (0: 1:1; 1: 1:10; 2: 1:100) D3..0 - CH1; D7..4 - CH2; D11..8 - CH3;..... |
| | 292 | 2 | D(15..0) | waveform invert (0: OFF; 1: INVERT) D3..0 - CH1; D7..4 - CH2; D11..8 - CH3;..... |
| | 294 | 2 | 1ns-100s | the time base of the acquired data (index value 0 - 1ns, 9 - 1us) |
| | 296 | 4 | Float | horizontal trigger time (floating-point, unit in μ s) |
| | 300 | 4 | Float | the processed horizontal trigger time (floating-point, unit in μ s) |
| | 304 | 4 | D(31..0) | the recording depth (0: 1K, 1: 10K, 2: 100K, ...) |
| | 8 | | | |
| | 316 | 4 | Float | sampling rate of the acquired data (floating-point, unit in MHz) |
| | 8 | | | |
| | 524 | 4 | Integer | the screen coordinates of the beginning point from acquired data (with blank pixels at left side) (integer, pixel value range: 0 - 999) |

| | | | | |
|-------|-----|----------|--|---|
| | 528 | 4 | Integer | the screen coordinates of the ending point from acquired data (with blank pixels at right side) (integer, pixel value range: 0 - 999) |
| | 8 | | | |
| 540 | 4 | D(0) | waveform data interpolation flag | |
| | 4 | | | |
| 548 | 4 | Float | time interval between two adjacent data points (Result_data_time, floating-point, unit in μ s) | |
| 552 | 4 | Integer | no. of horizontal offset of interpolated data (integer, pixel value range: 0 - 999) | |
| | | | | |
| 768 | 2 | 2mV - 5V | real-time CH1 voltage division (index value 0 - 1mV, 9 - 1V) | |
| 770 | 2 | 2mV - 5V | real-time CH2 voltage division (index value 0 - 1mV, 9 - 1V) | |
| 772 | 2 | 2mV - 5V | real-time CH3 voltage division (index value 0 - 1mV, 9 - 1V) | |
| 774 | 2 | 2mV - 5V | real-time CH4 voltage division (index value 0 - 1mV, 9 - 1V) | |
| 776 | 4 | Float | real-time CH1 zero position (floating-point, unit in division) | |
| 780 | 4 | Float | real-time CH2 zero position (floating-point, unit in division) | |
| 784 | 4 | Float | real-time CH3 zero position (floating-point, unit in division) | |
| 788 | 4 | Float | real-time CH4 zero position (floating-point, unit in division) | |

iv. Calculation Tips Towards Waveform Data

i). the frequency counter from channel signal -

$$\text{frequency counter} = \text{system clock} * \text{channel frequency count} / \text{channel reference count}$$

ii). the channel voltage -

$$\text{channel voltage} = (\text{channel ADC data} / 6400 - \text{channel zero offset}) * \text{channel volt scale}$$

Note: ADC Data = waveform data, or Vmax, or Vmin, or Vavg (16-bit signed integer data)

iii). the displayed position of waveform data (vertical direction) -

the displayed vertical voltage (unit: division, range: ± 5 divisions)

$$= (\text{ADC data} / 6400 - \text{acquisition zero offset}) * (\text{acquisition volt scale} / \text{real-time volt scale}) + \text{real-time zero offset}$$

In real-time data acquisition, the real-time waveform data is the one for data acquisition.

$$\text{Disp. vertical voltage} = \text{ADC data} / 6400 \quad (\text{unit: division, range: } \pm 5 \text{ divisions})$$

Note: ADC Data = waveform data (16-bit signed integer data)

INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronics Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Contact your local authority for details of recycling schemes in your area.



Made in China
PO Box 13362 Dublin 2
LS12 2QQ